


GNSS observation file monitoring for 0515


Last RINEX file: 05152931.220
RINEX version: 3.02
Marker: 1109
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

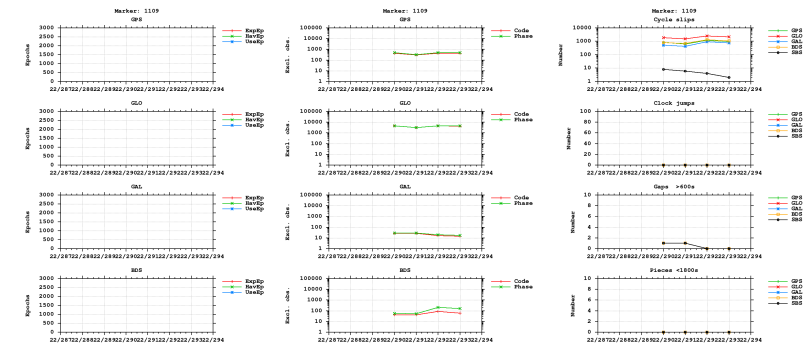



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

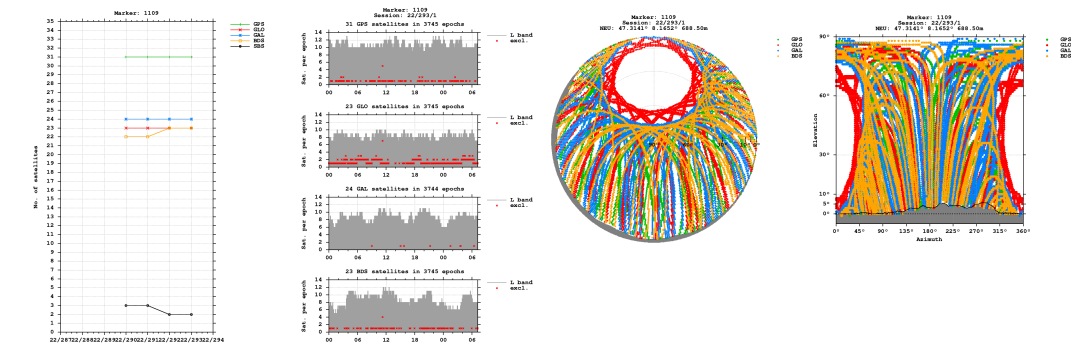


Bands

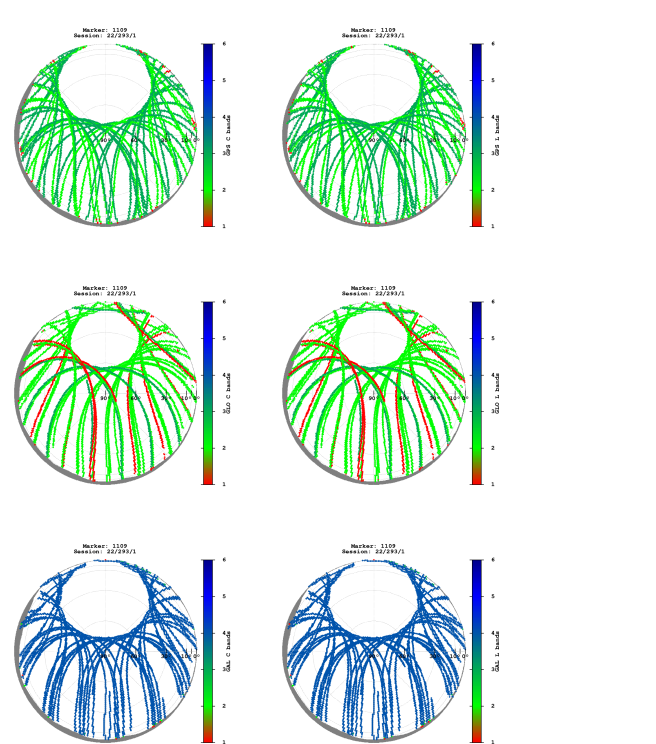

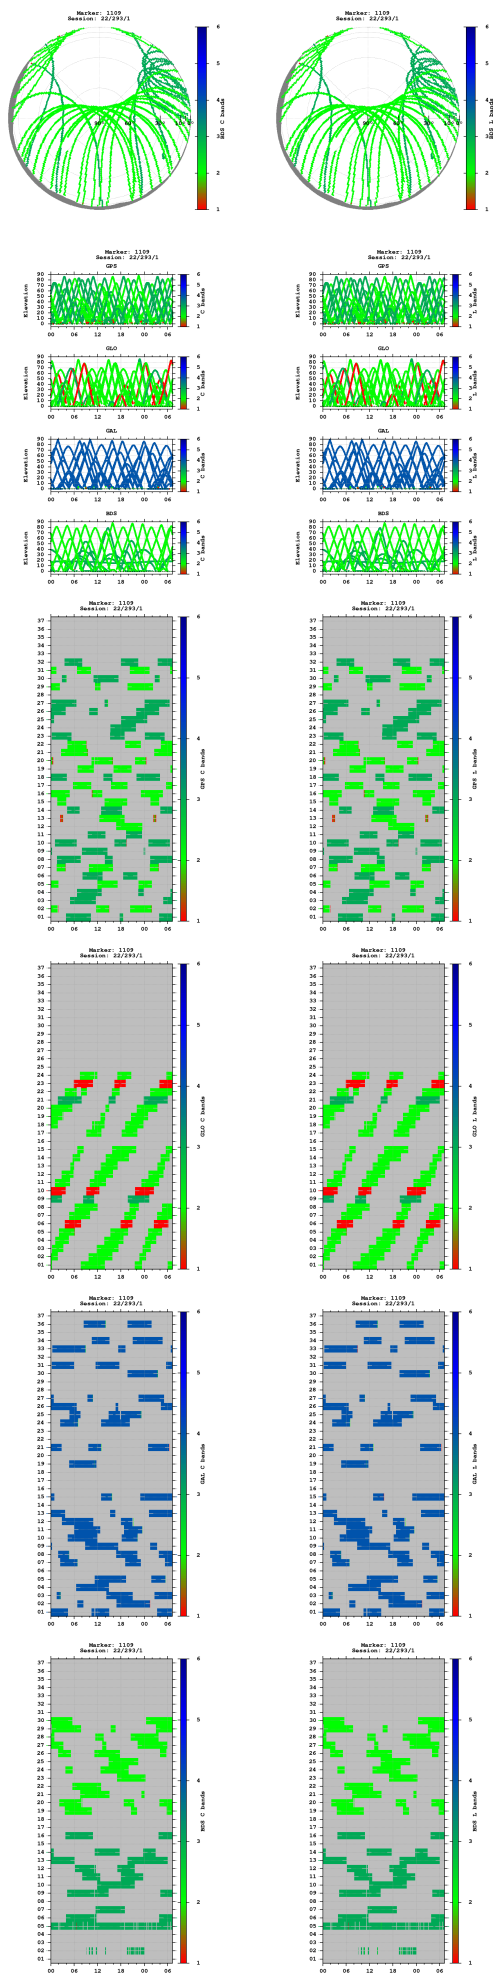


Observations




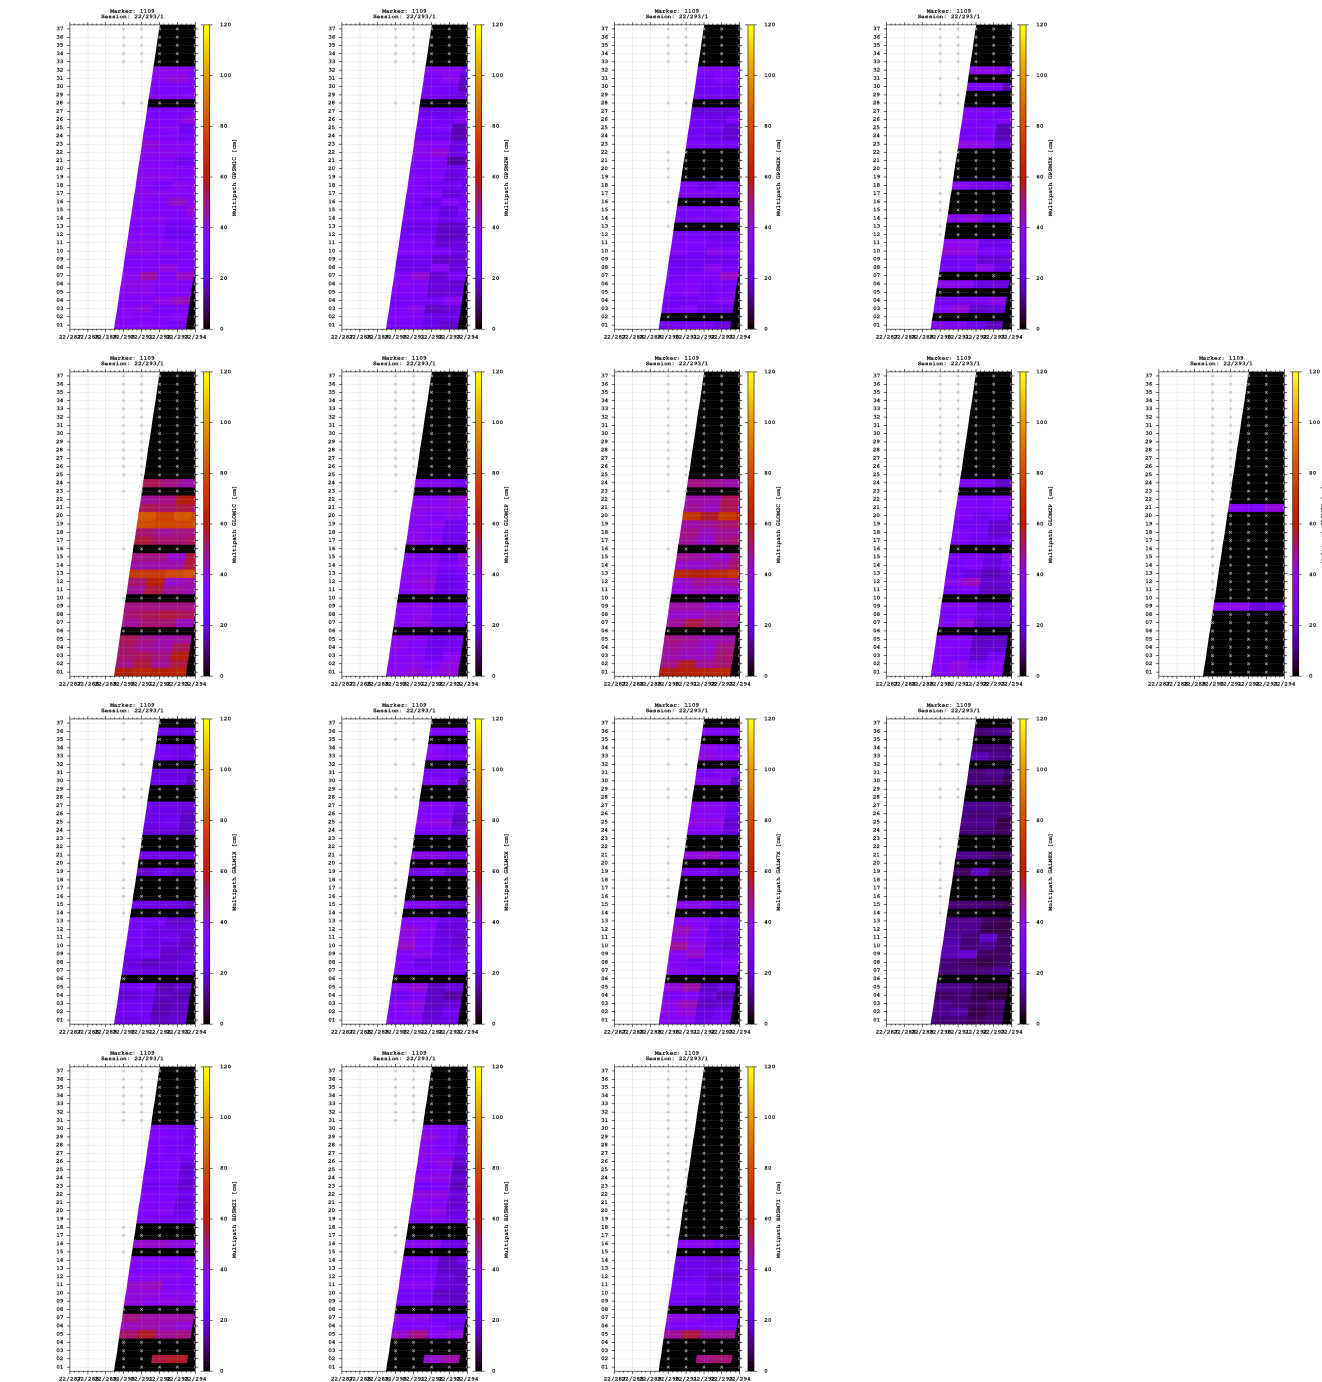


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

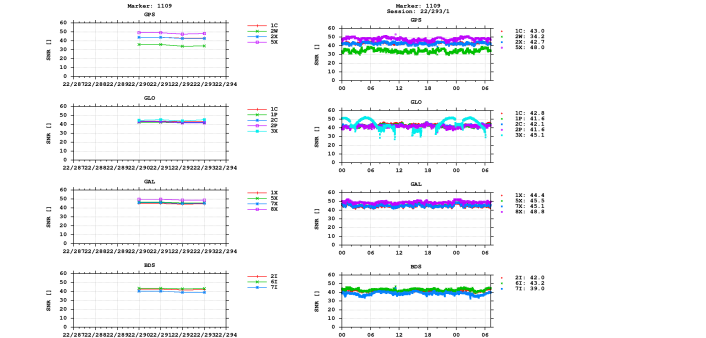


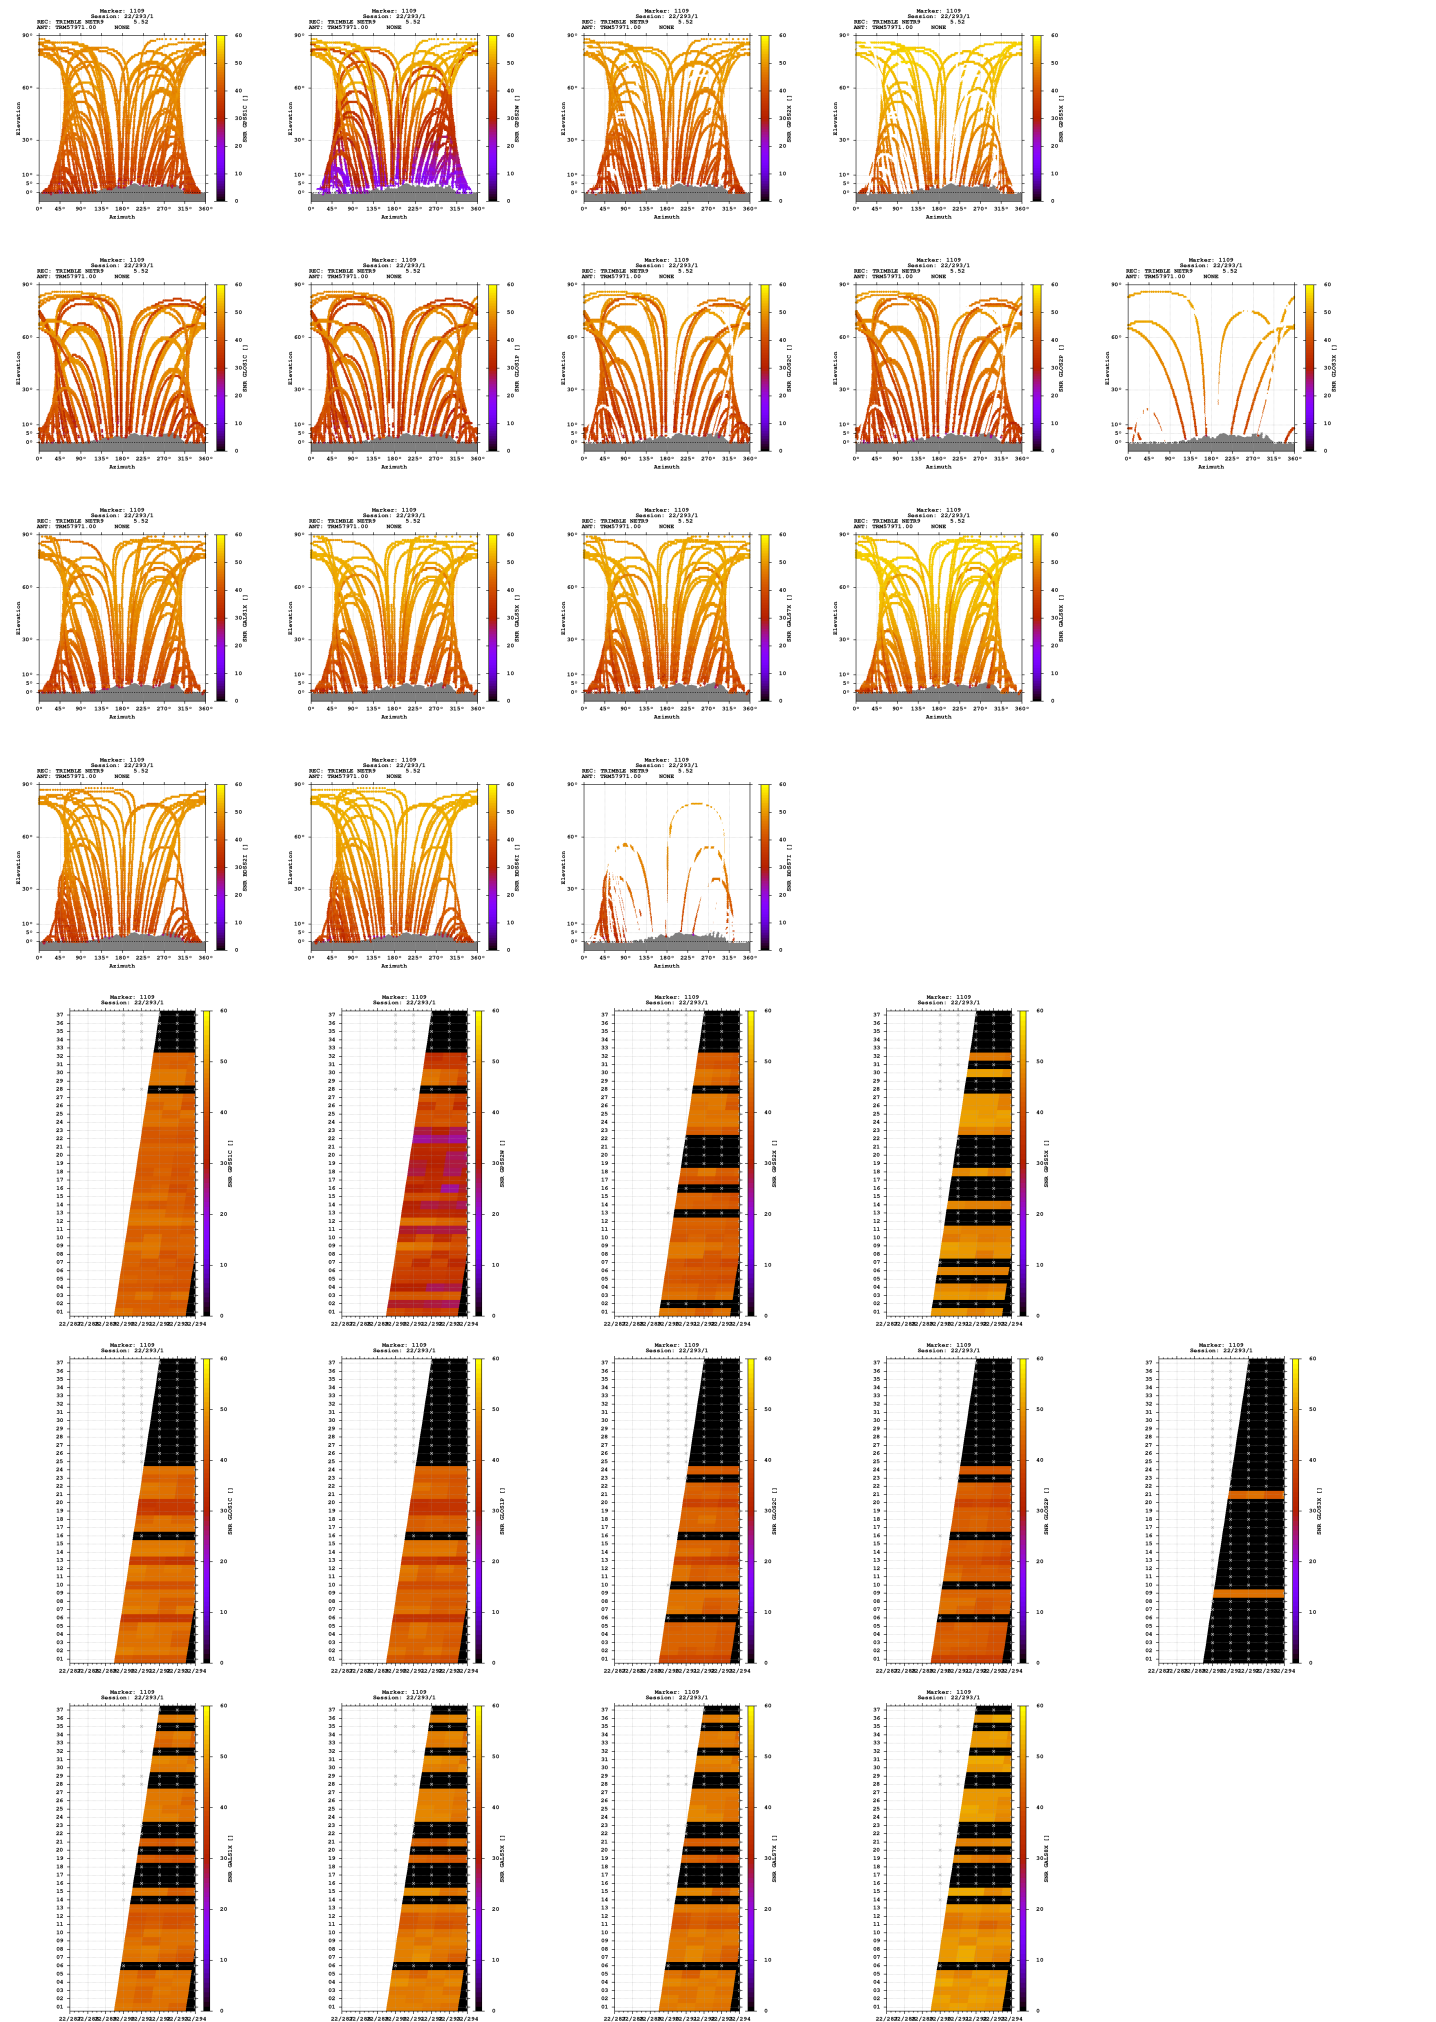

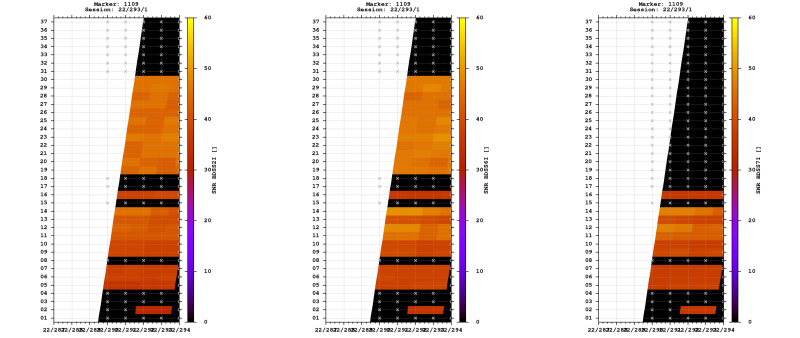


Estimates

2022-10-19 10:44:30	GPS	4288633.2647	615345.0951	4666012.8216	47.314058339	8.165229655	688.4972
2022-10-19 10:44:30	GLO	4288633.0054	615345.6715	4666012.3091	47.314056370	8.165237687	688.0019
2022-10-19 10:44:30	GAL	4288633.5537	615344.9803	4666012.9326	47.314057232	8.165227609	688.7617
2022-10-19 10:44:30	BDS	4288633.2680	615346.0113	4666016.4789	47.314079758	8.165241642	691.2761

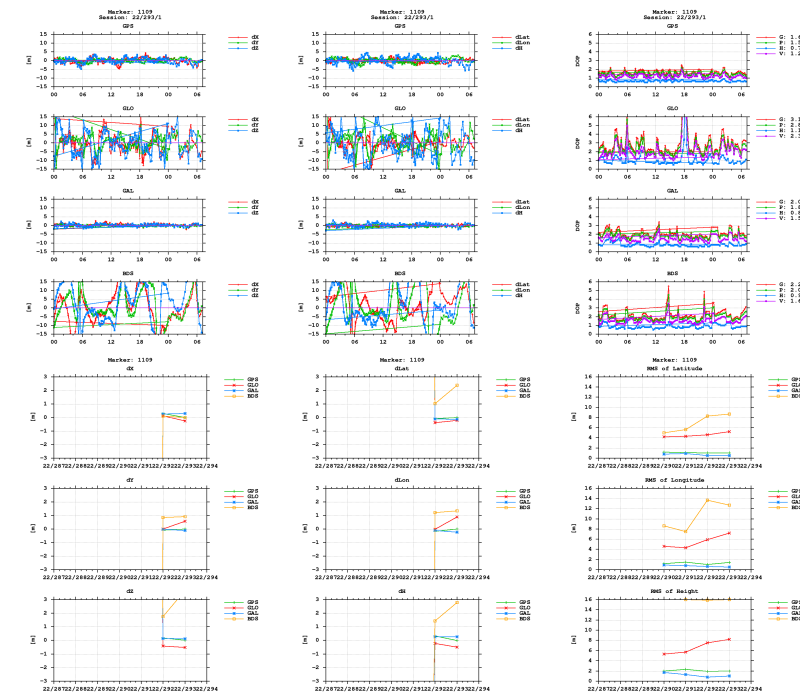

BNC



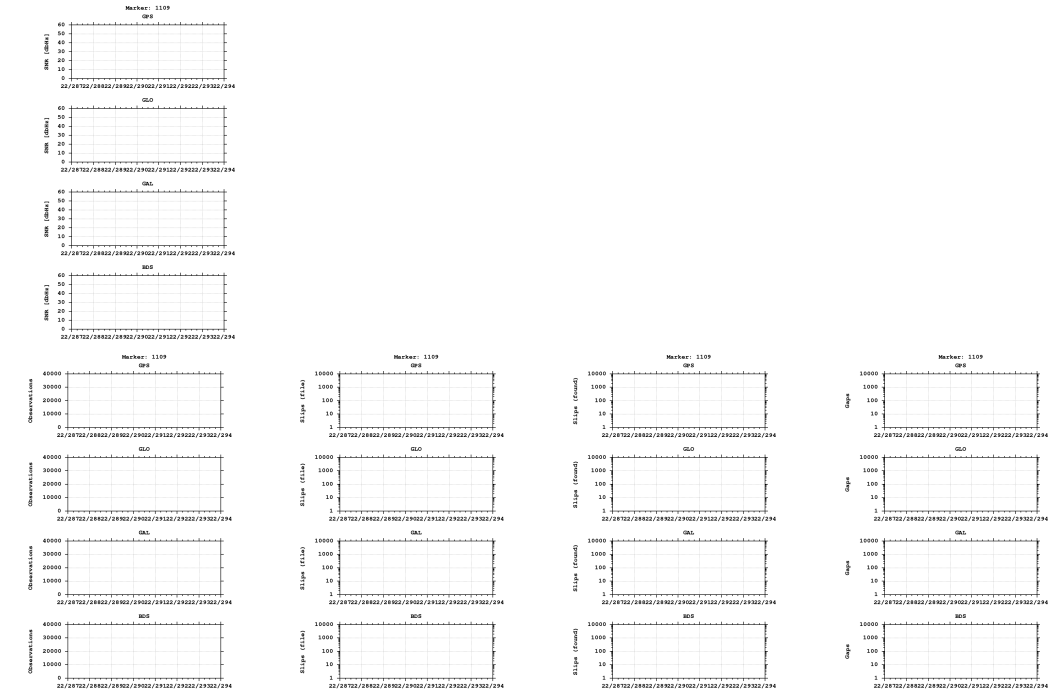

Equipment

2022-10-17 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)