


GNSS observation file monitoring for 0516


Last RINEX file: 05162911.22O
RINEX version: 3.02
Marker: 1110
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


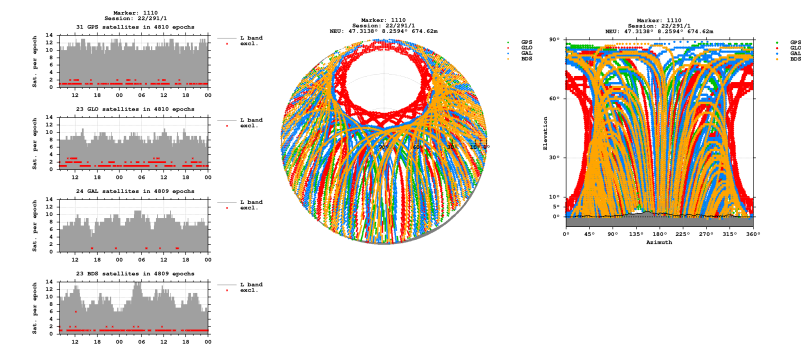


Bands

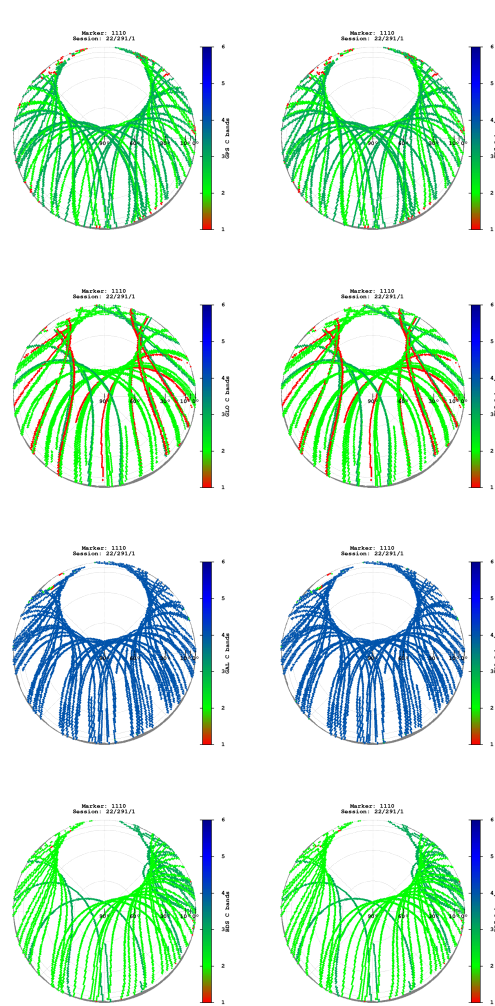

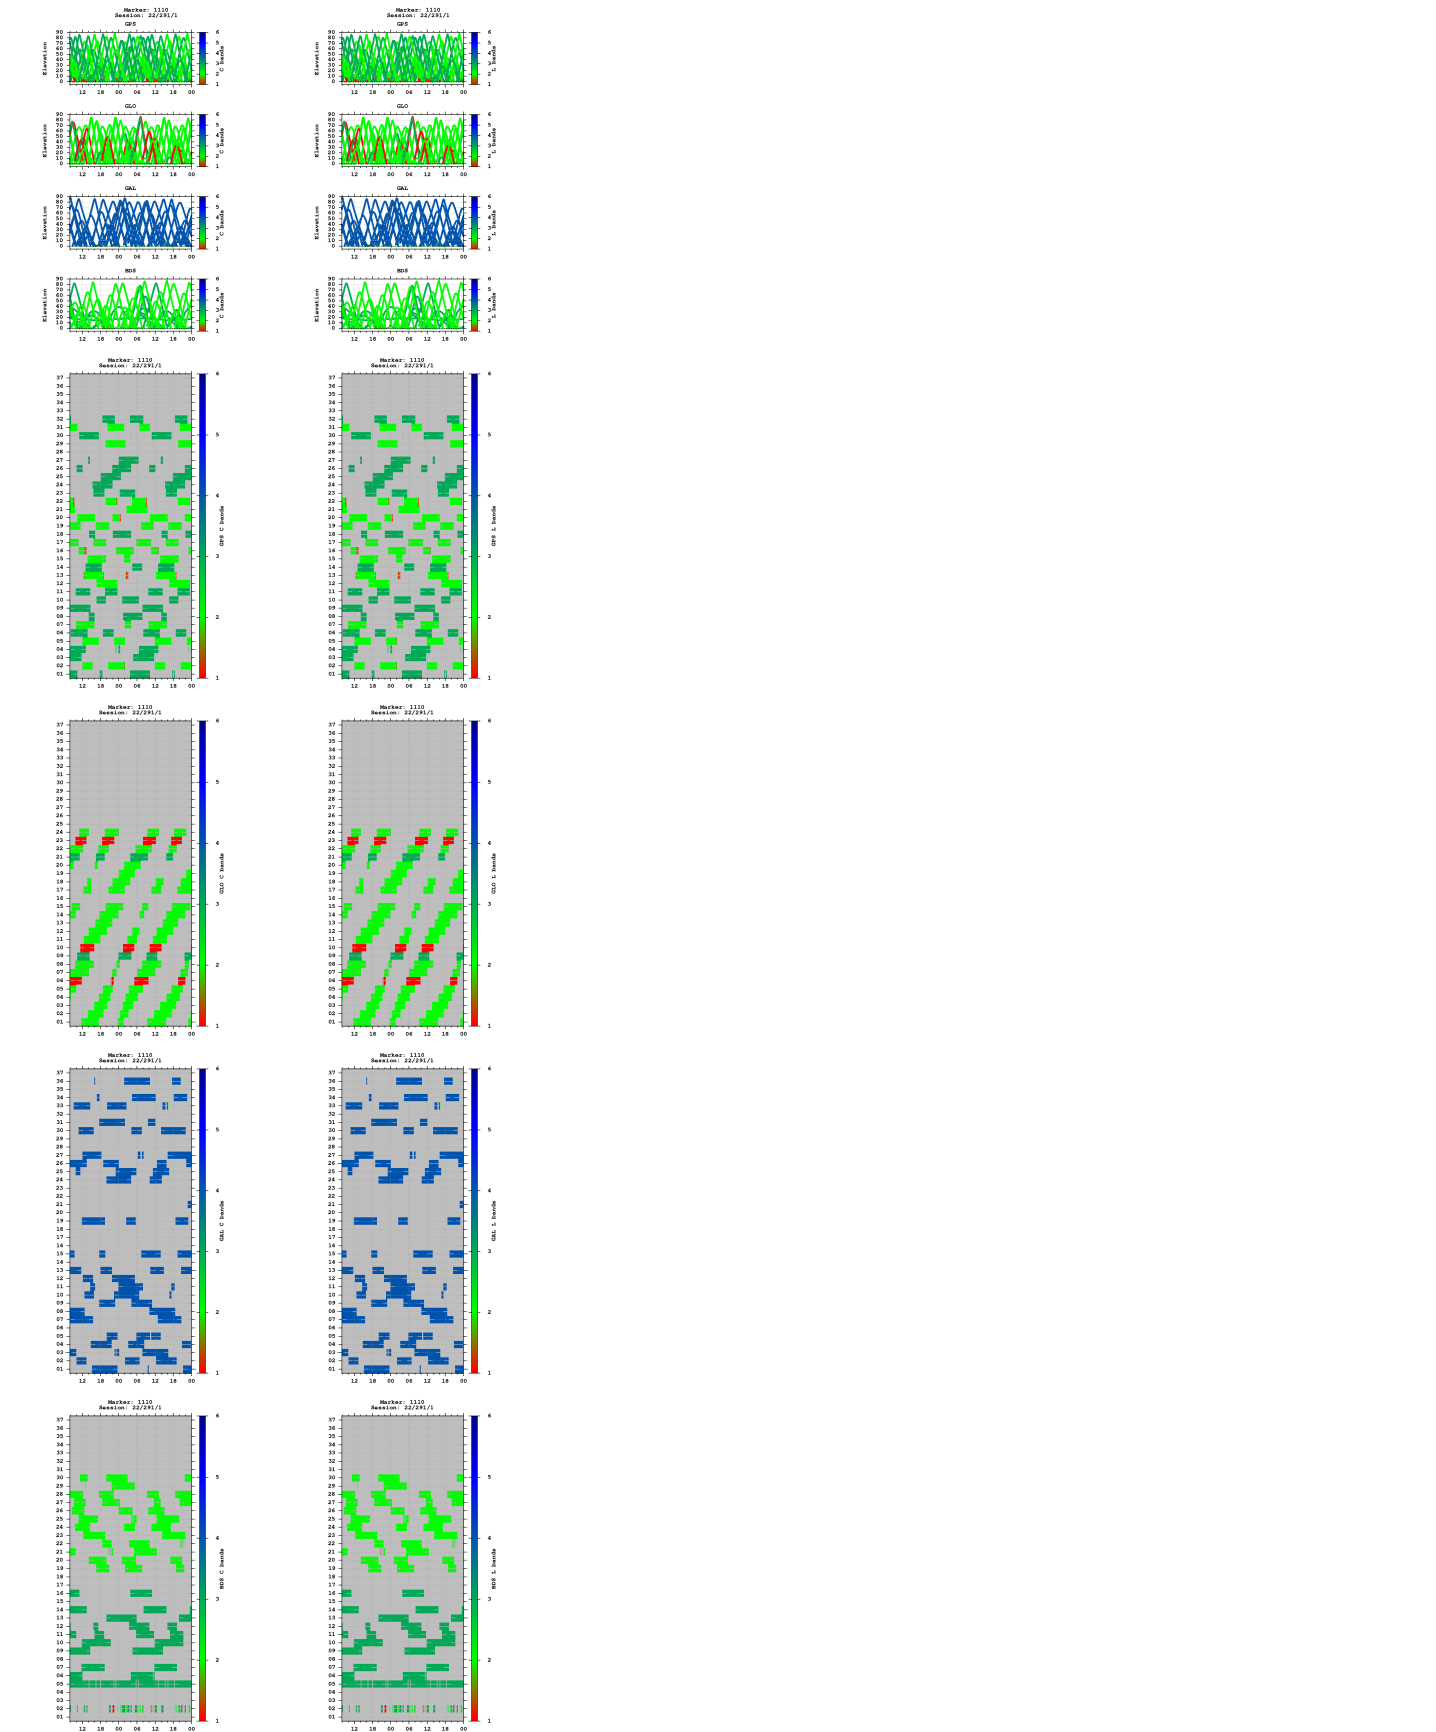



Multipath

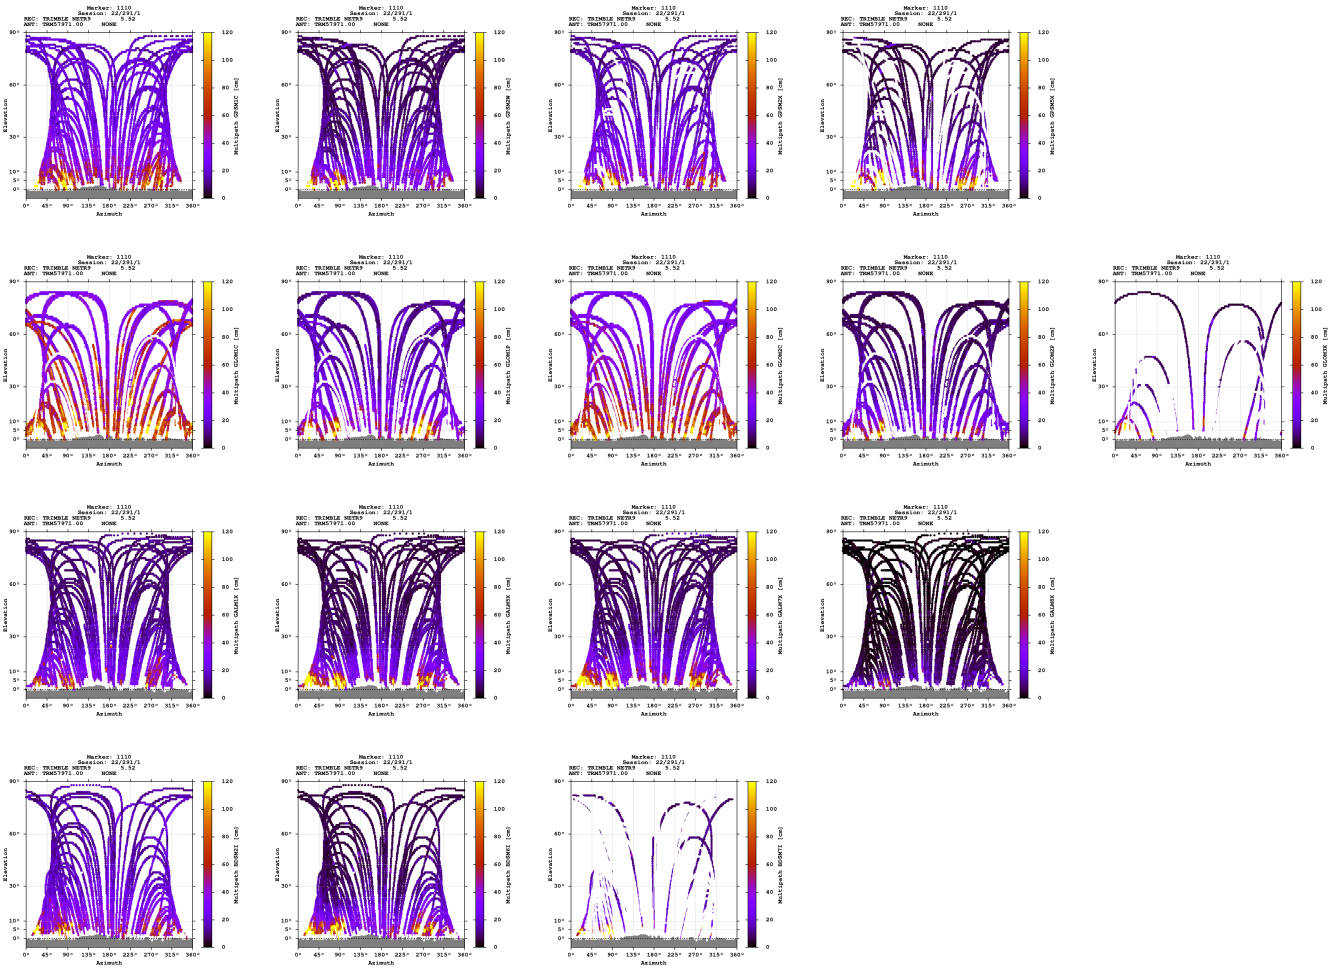

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

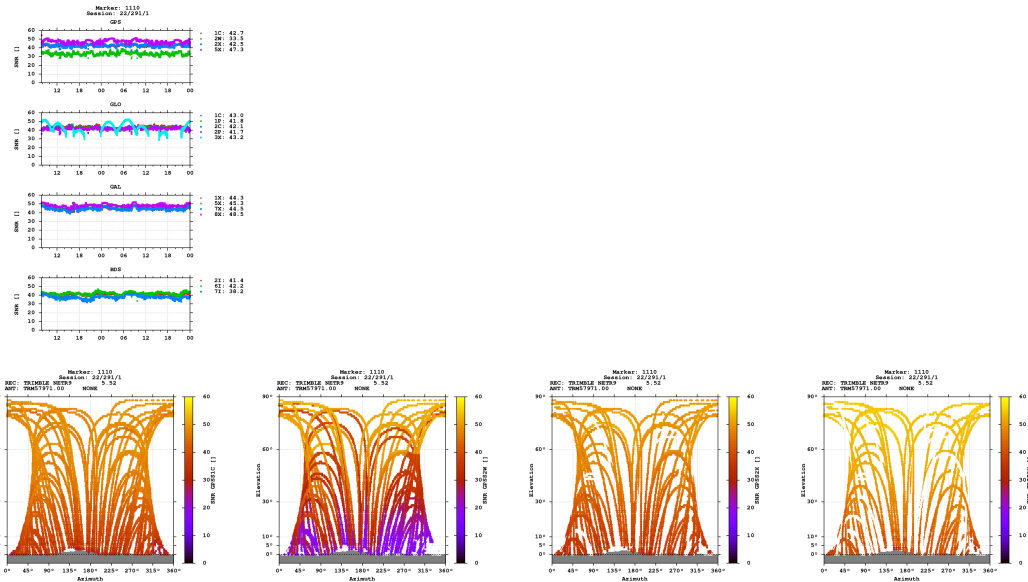

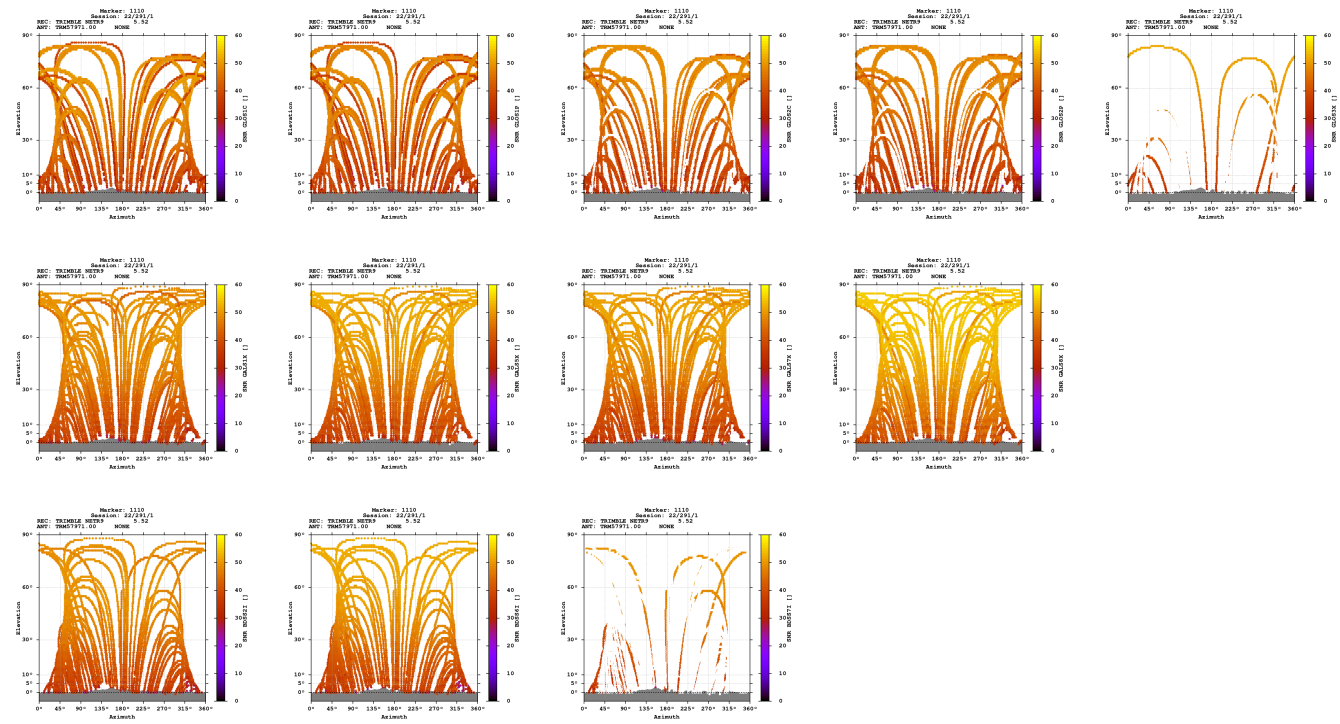

Estimates

2022-10-18 07:52:00	GPS	4287627.5986	622395.7827	4665983.0745	47.313799080	8.259414790	674.6169
2022-10-18 07:52:00	GLO	4287627.3146	622395.4783	4665983.1209	47.313801510	8.259411346	674.4308
2022-10-18 07:52:00	GAL	4287627.2030	622395.7467	4665982.7687	47.313799838	8.259415071	674.1232
2022-10-18 07:52:00	BDS	4287626.2483	622395.1781	4665983.2188	47.313809368	8.259409442	673.7581

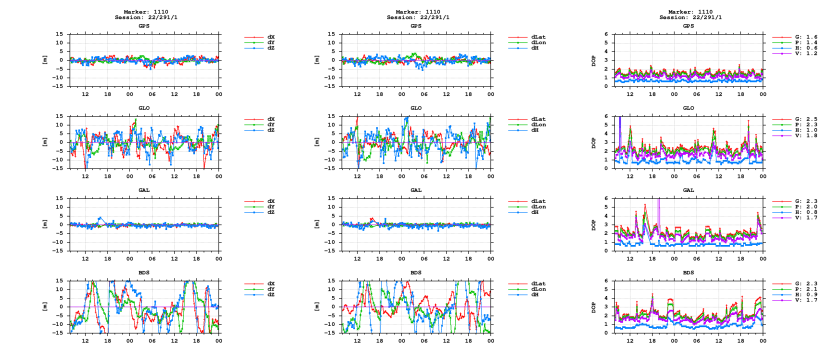

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)