

GNSS observation file monitoring for 0516

Last RINEX file: 05162921.220


RINEX version: 3.02

Marker: 1110

Receiver: 516 TRIMBLE NETR9 5.52

Antenna: 516 TRM57971.00 NONE


Epochs

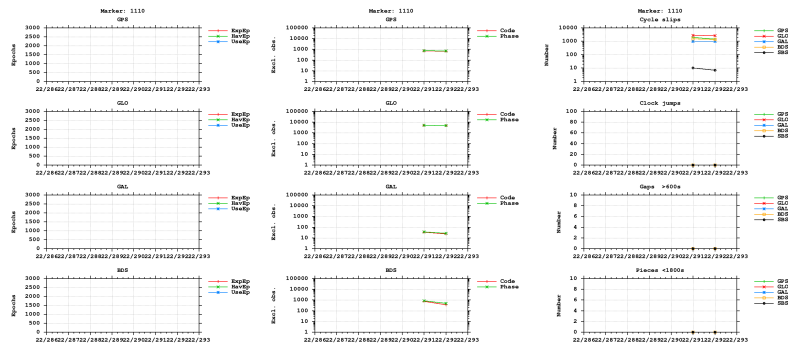


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

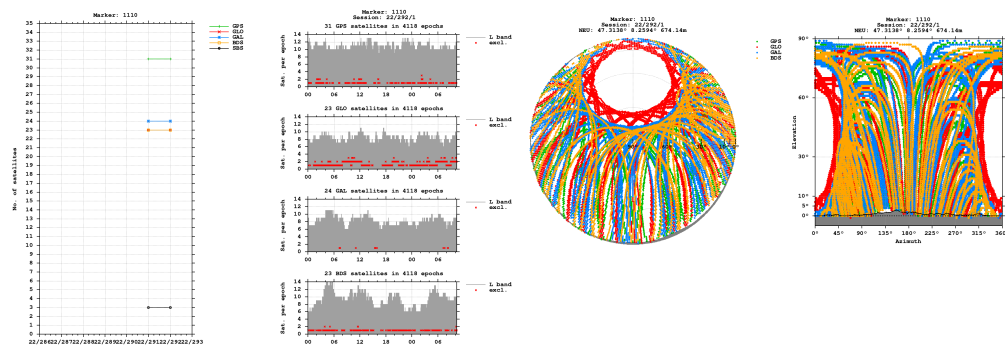


Bands

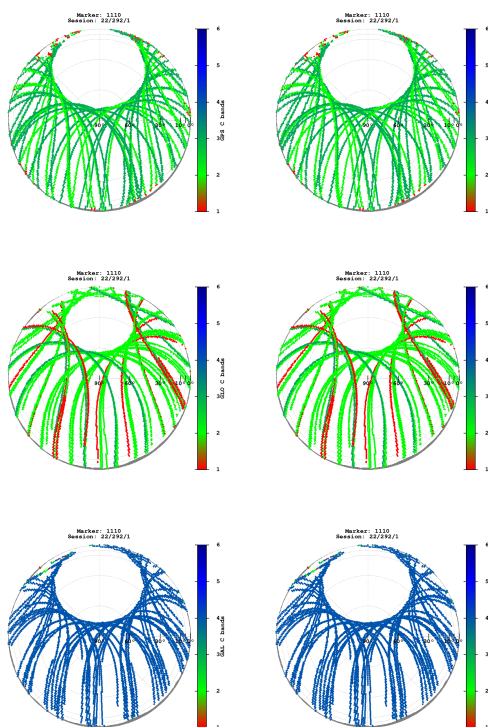


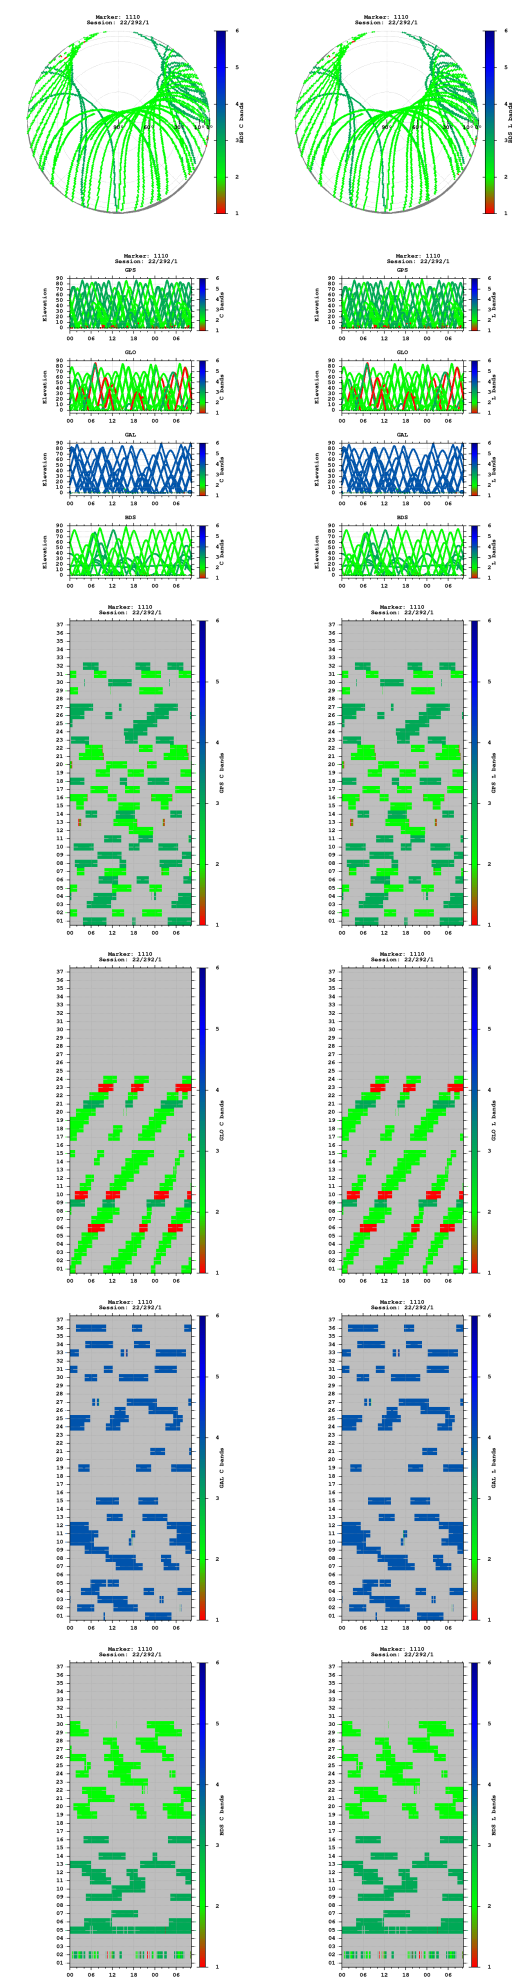


Observations

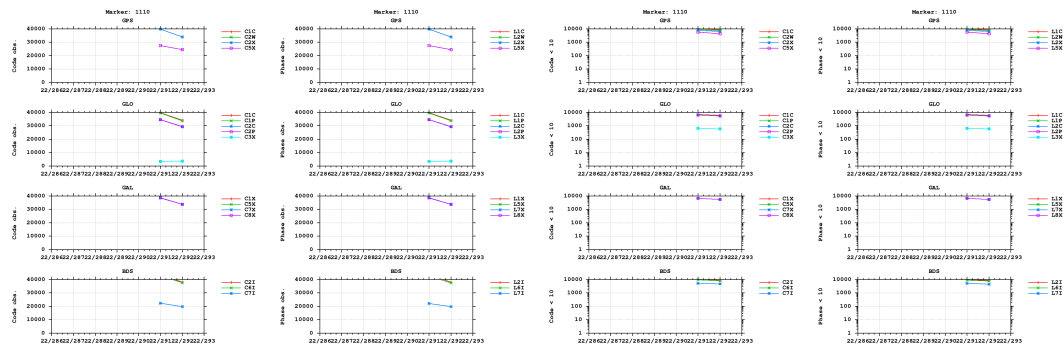


Multipath

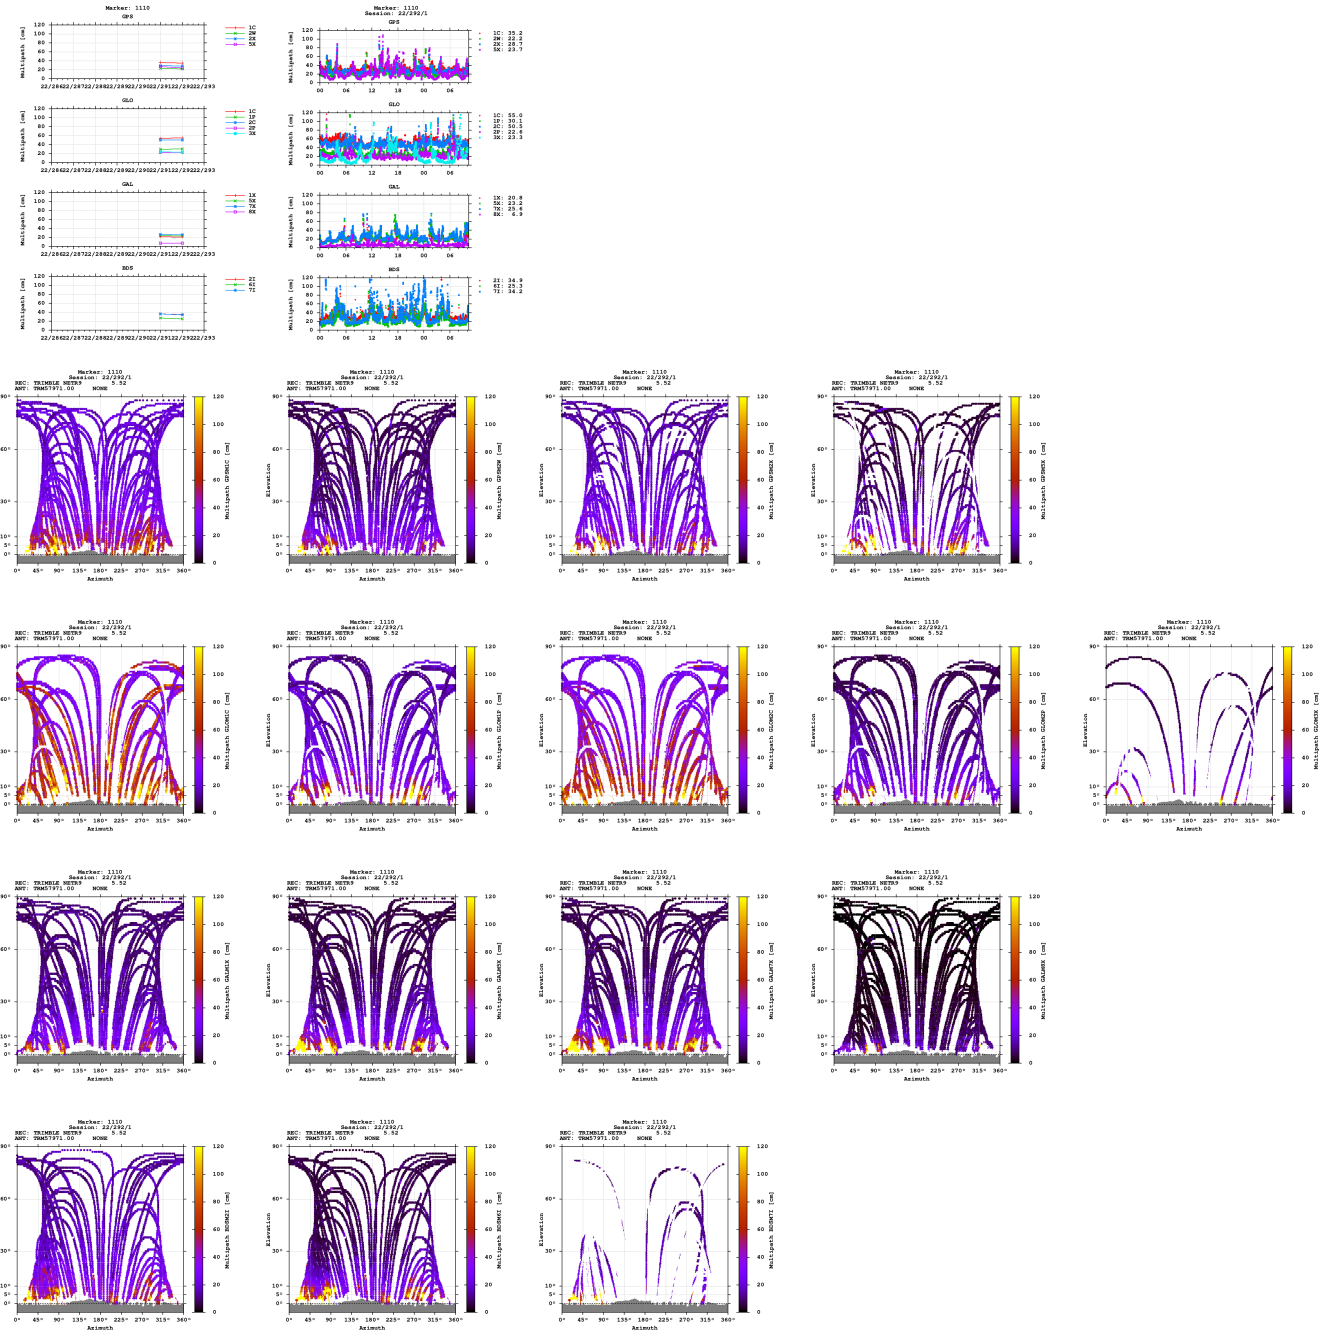


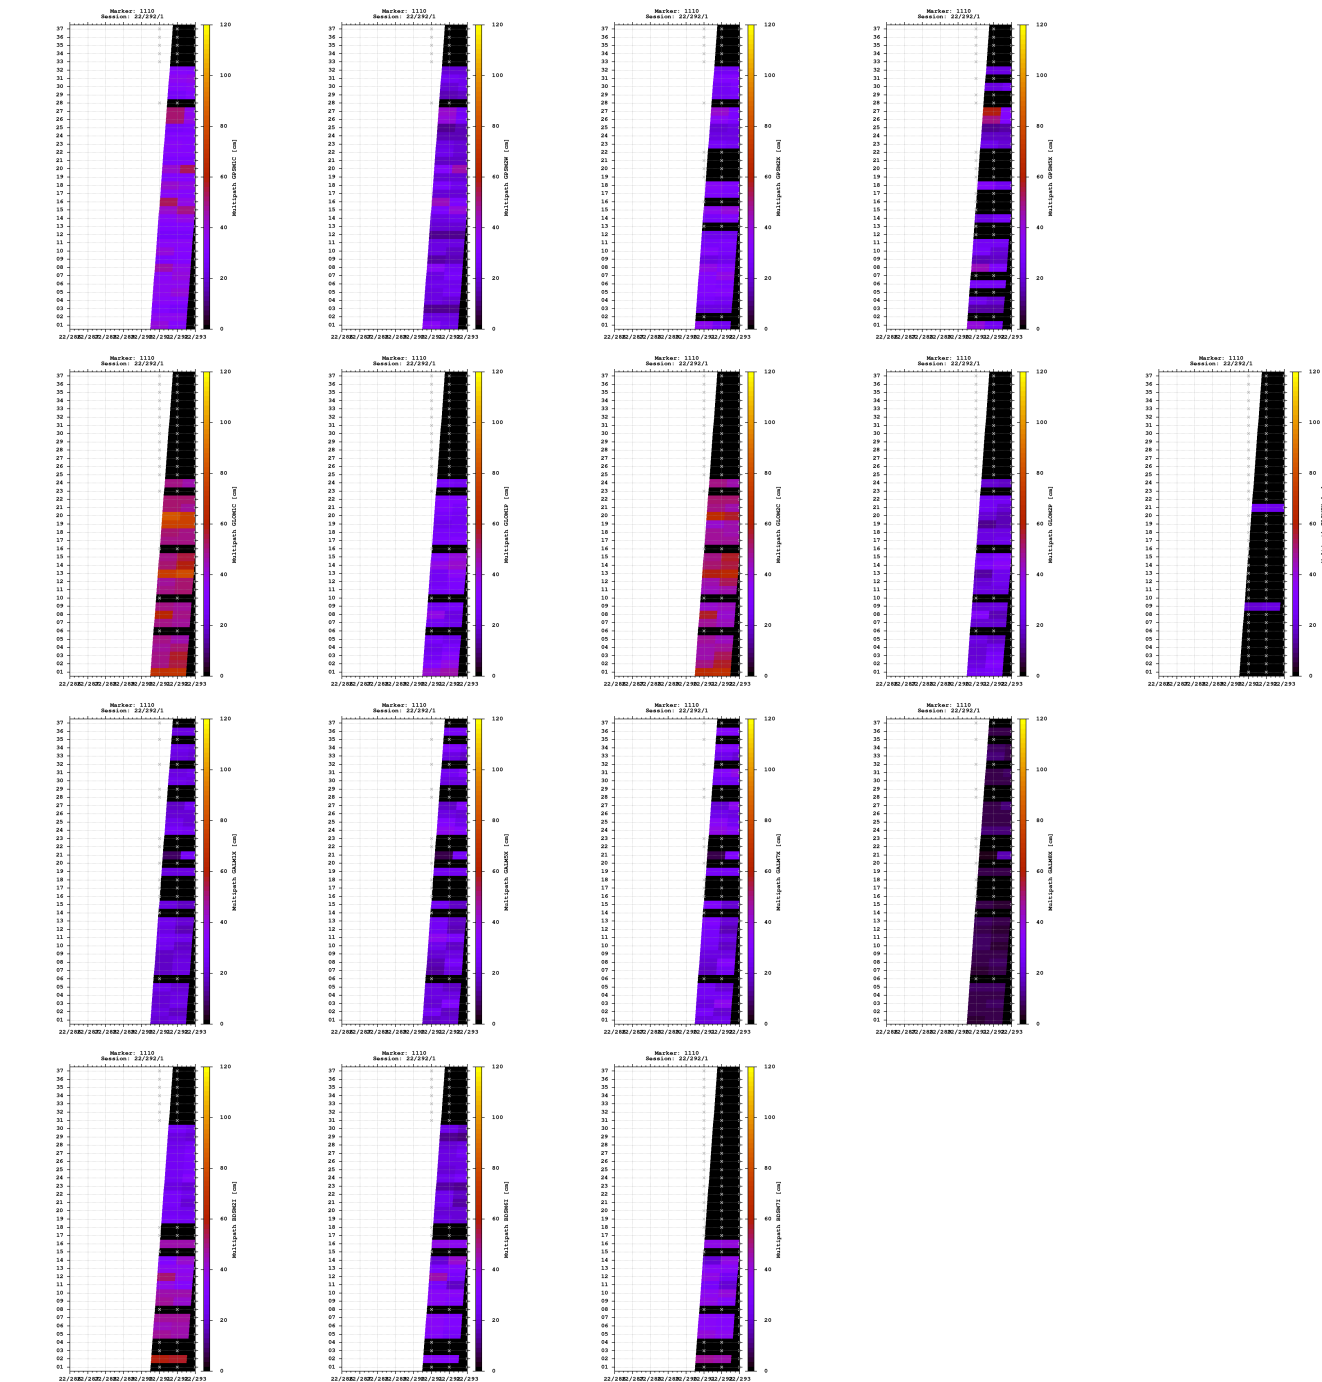


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

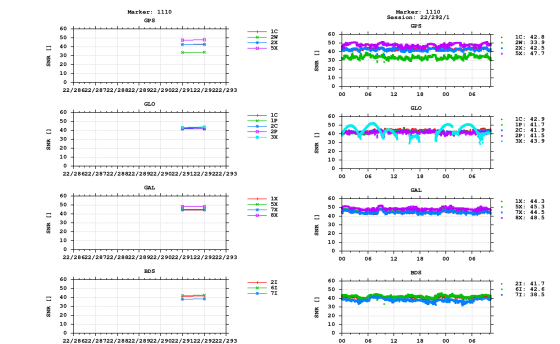


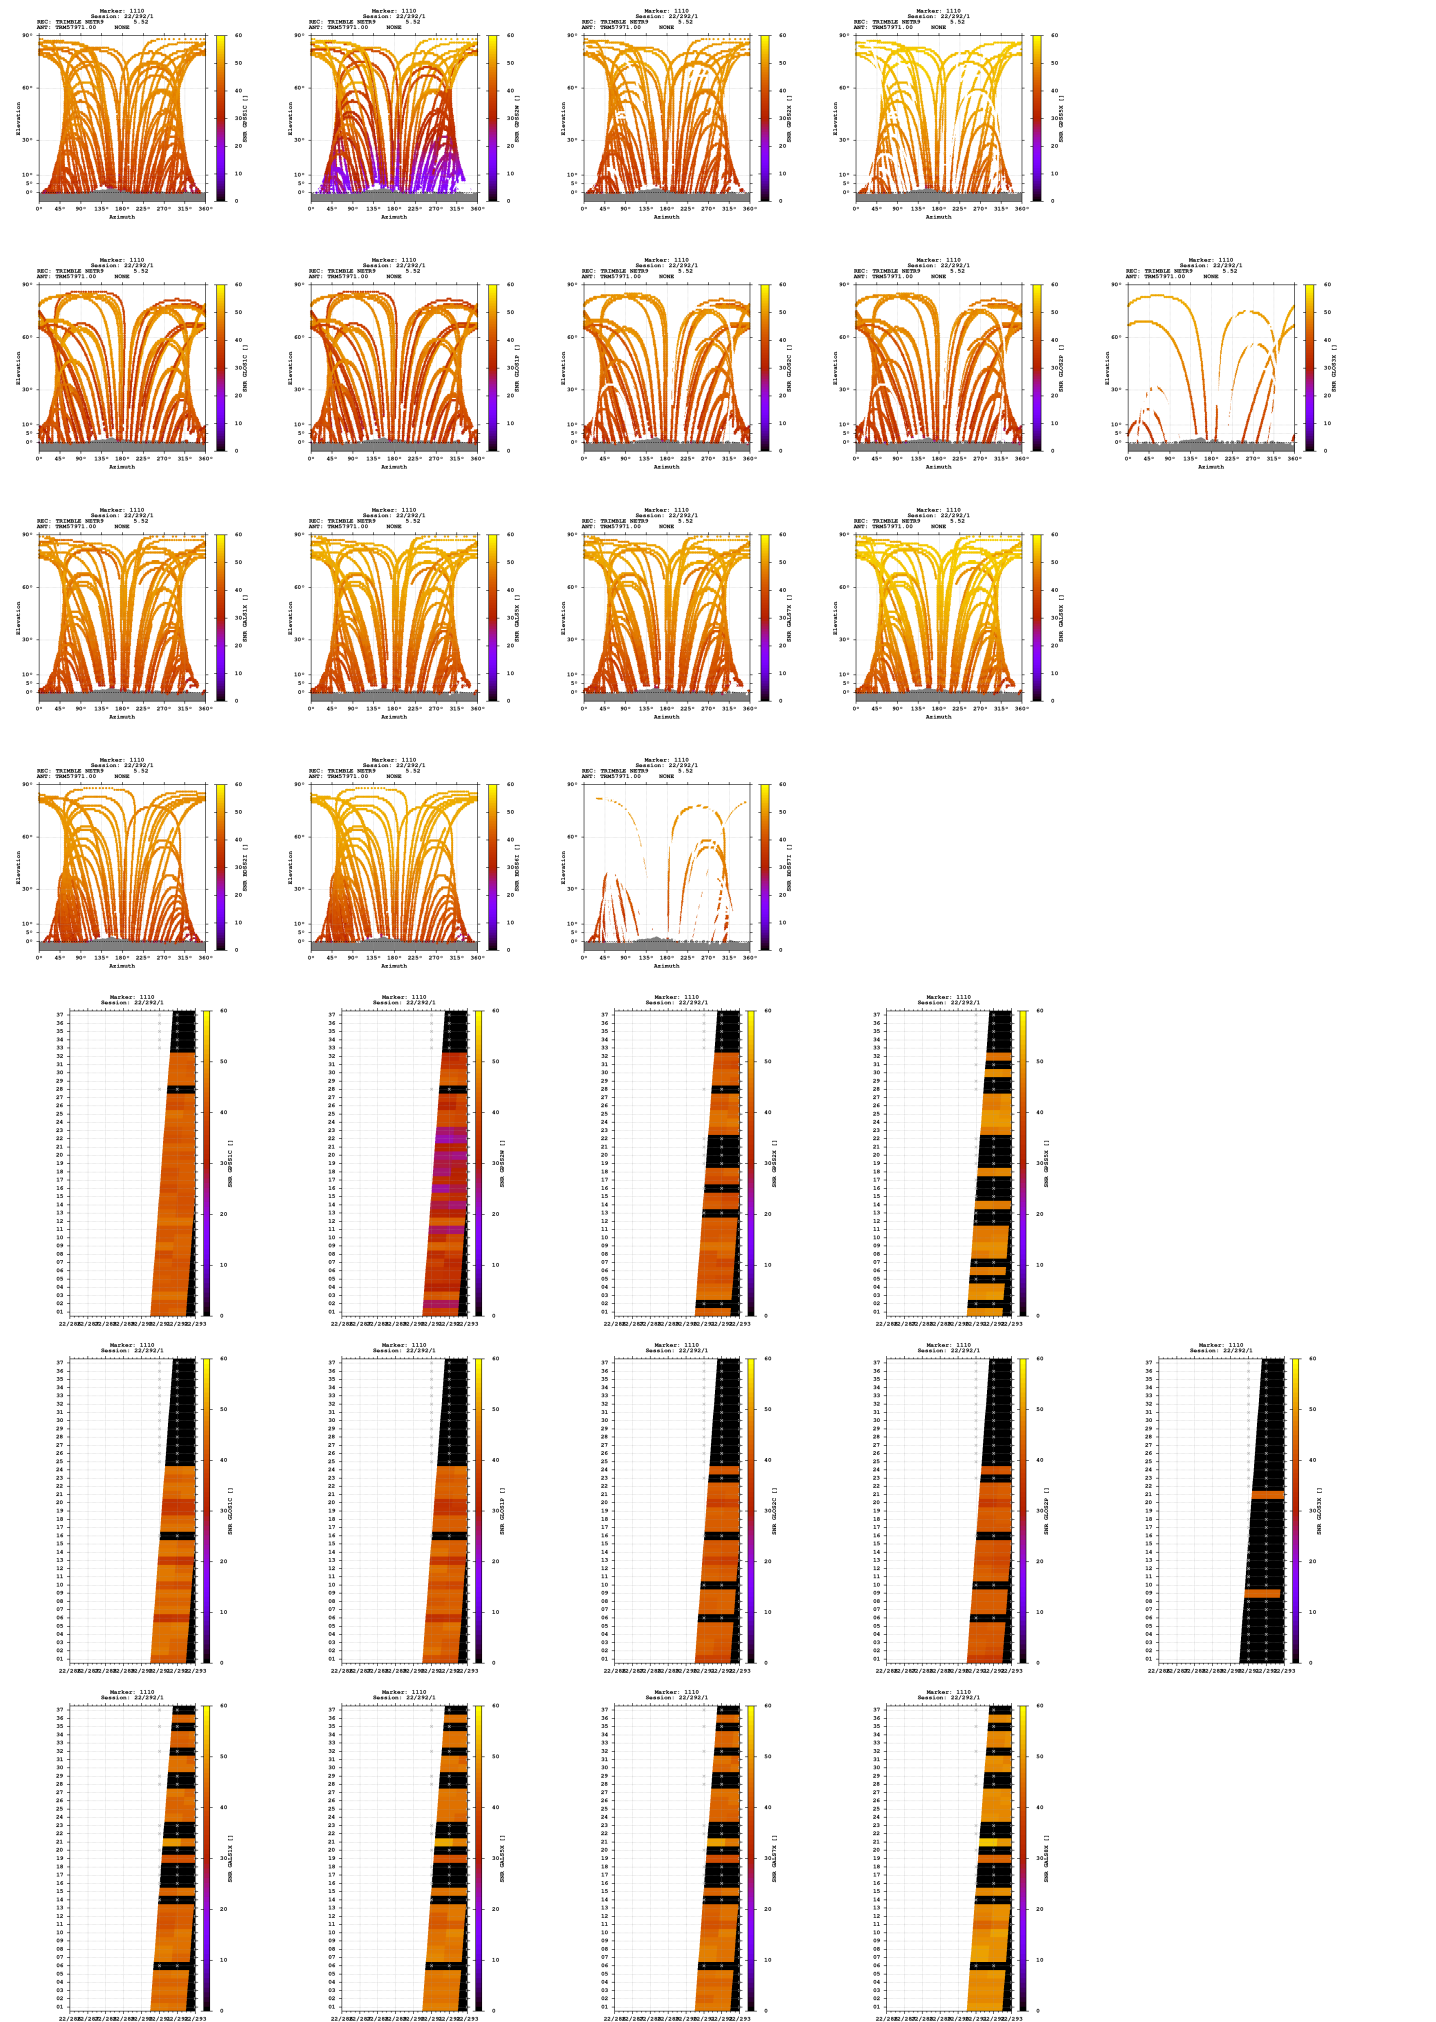

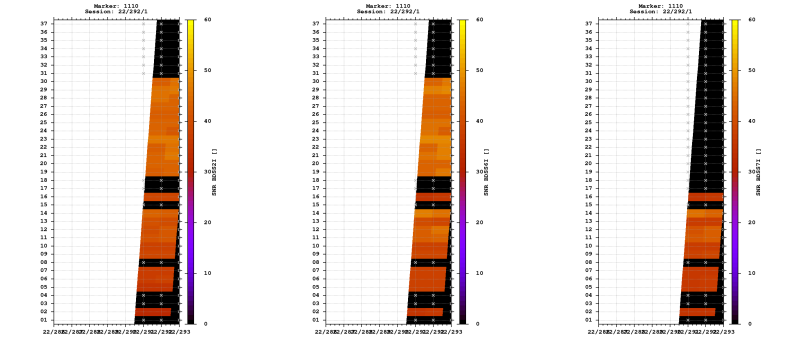


Estimates

2022-10-18 07:52:00	GPS	4287627.1827	622395.9280	4665982.7853	47.313799899	8.259417482	674.1395
2022-10-18 07:52:00	GLO	4287626.9892	622395.6941	4665982.6309	47.313800446	8.259414788	673.8733
2022-10-18 07:52:00	GAL	4287627.3714	622395.7761	4665982.8011	47.313798906	8.259415136	674.2629
2022-10-18 07:52:00	BDS	4287625.1464	622395.4052	4665983.7577	47.313819648	8.259414508	673.4370

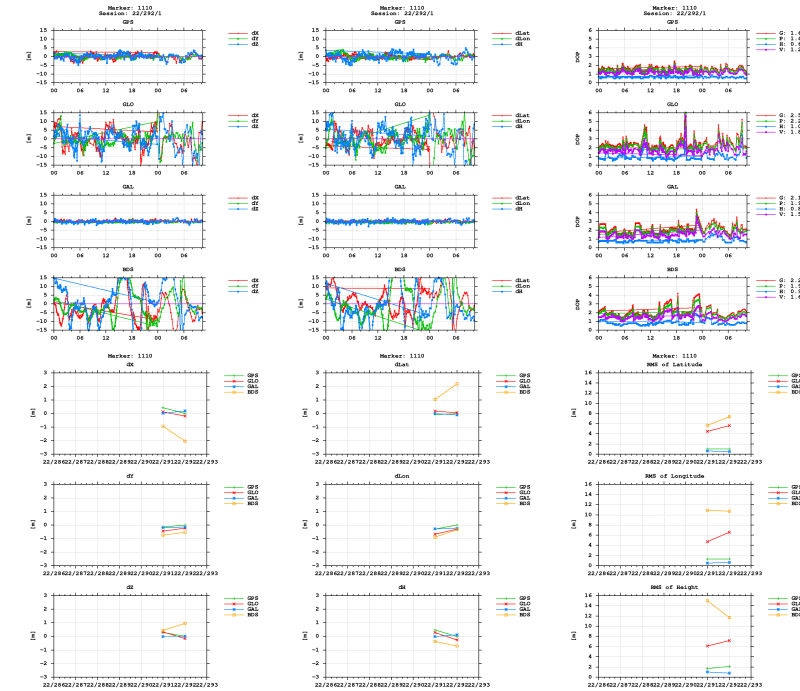

BNC



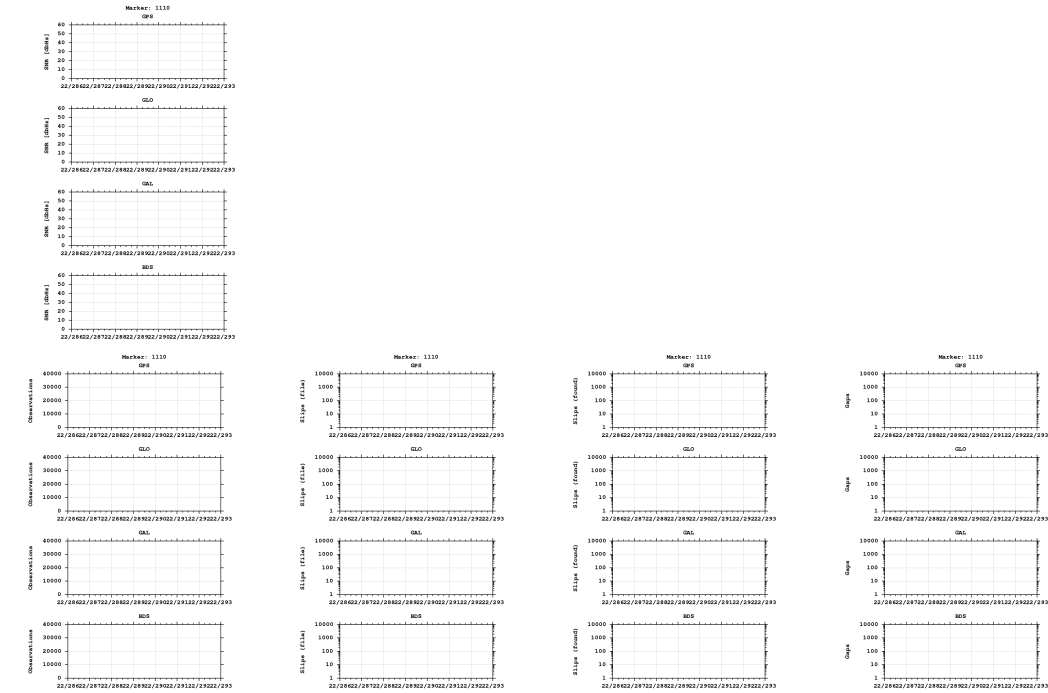

Equipment

2022-10-18 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)