

GNSS observation file monitoring for 0517

Last RINEX file: 05172911.220


RINEX version: 3.02

Marker: 1069

Receiver: 517 TRIMBLE NETR9 5.52


Antenna: 519 TRM57971.00 NONE

Epochs

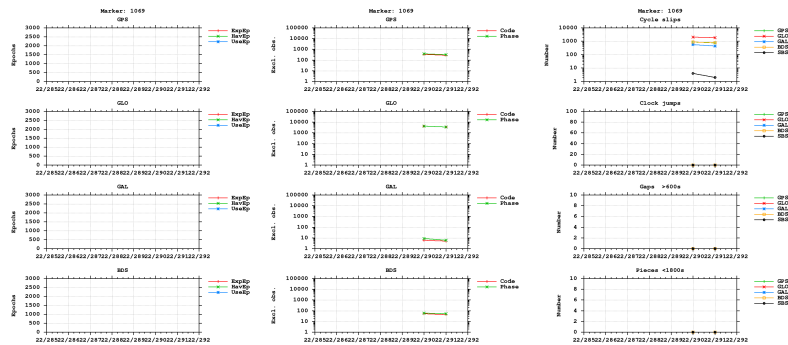



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

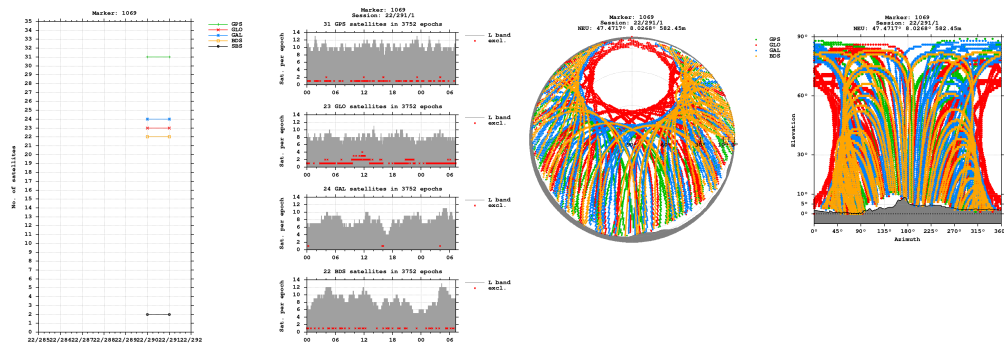


Bands

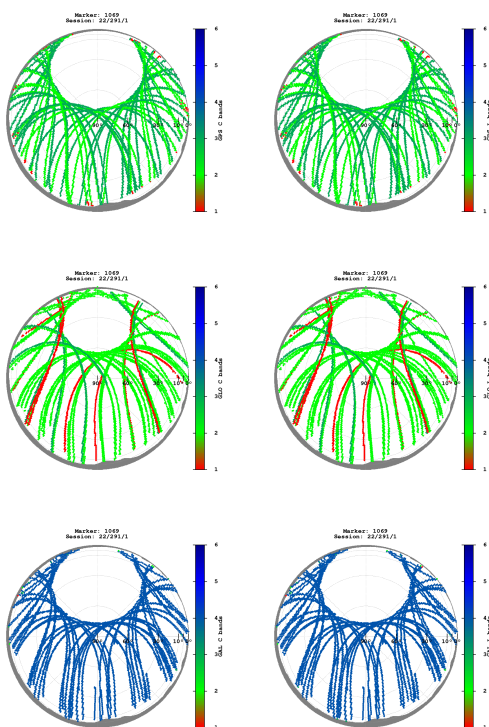


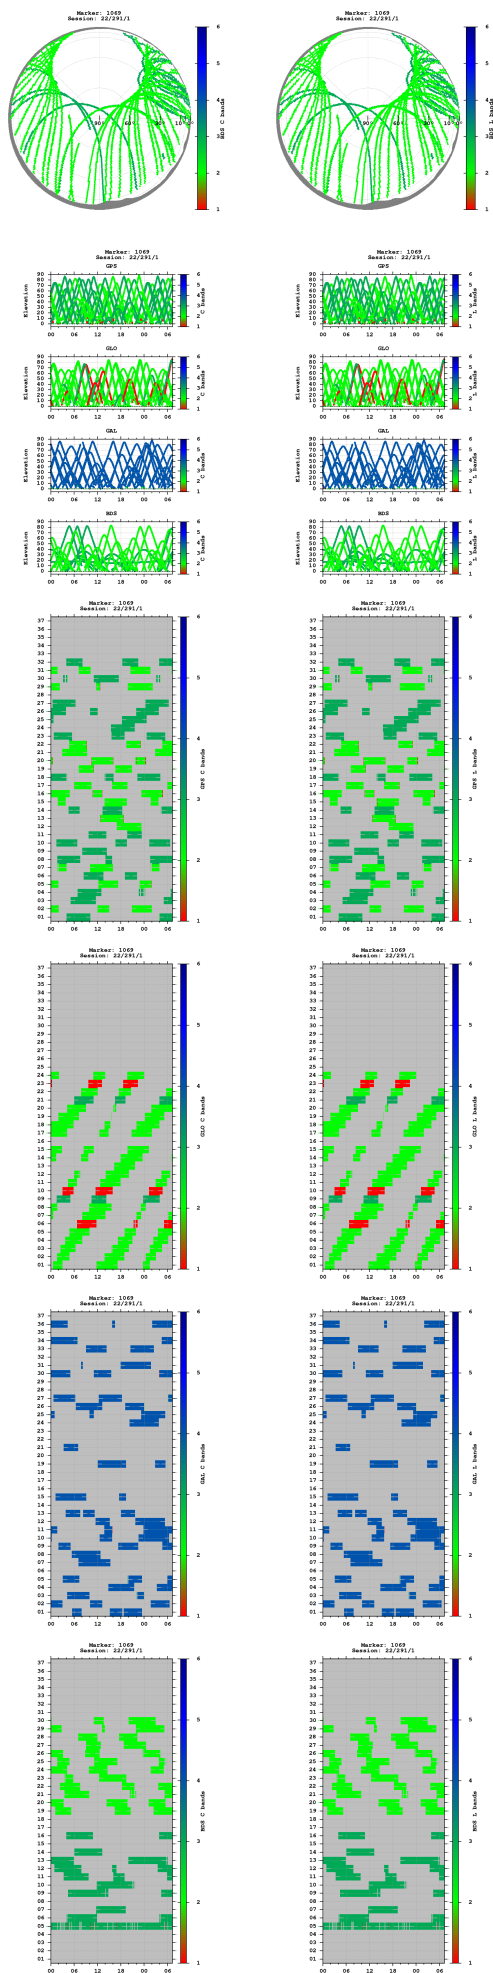


Observations

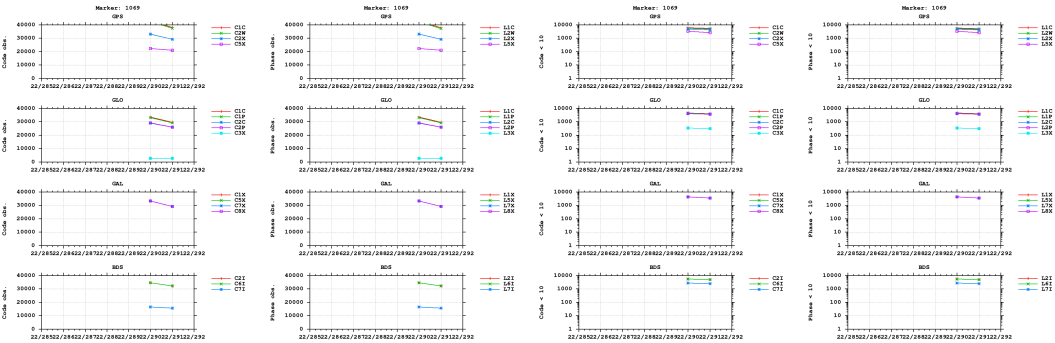


Multipath

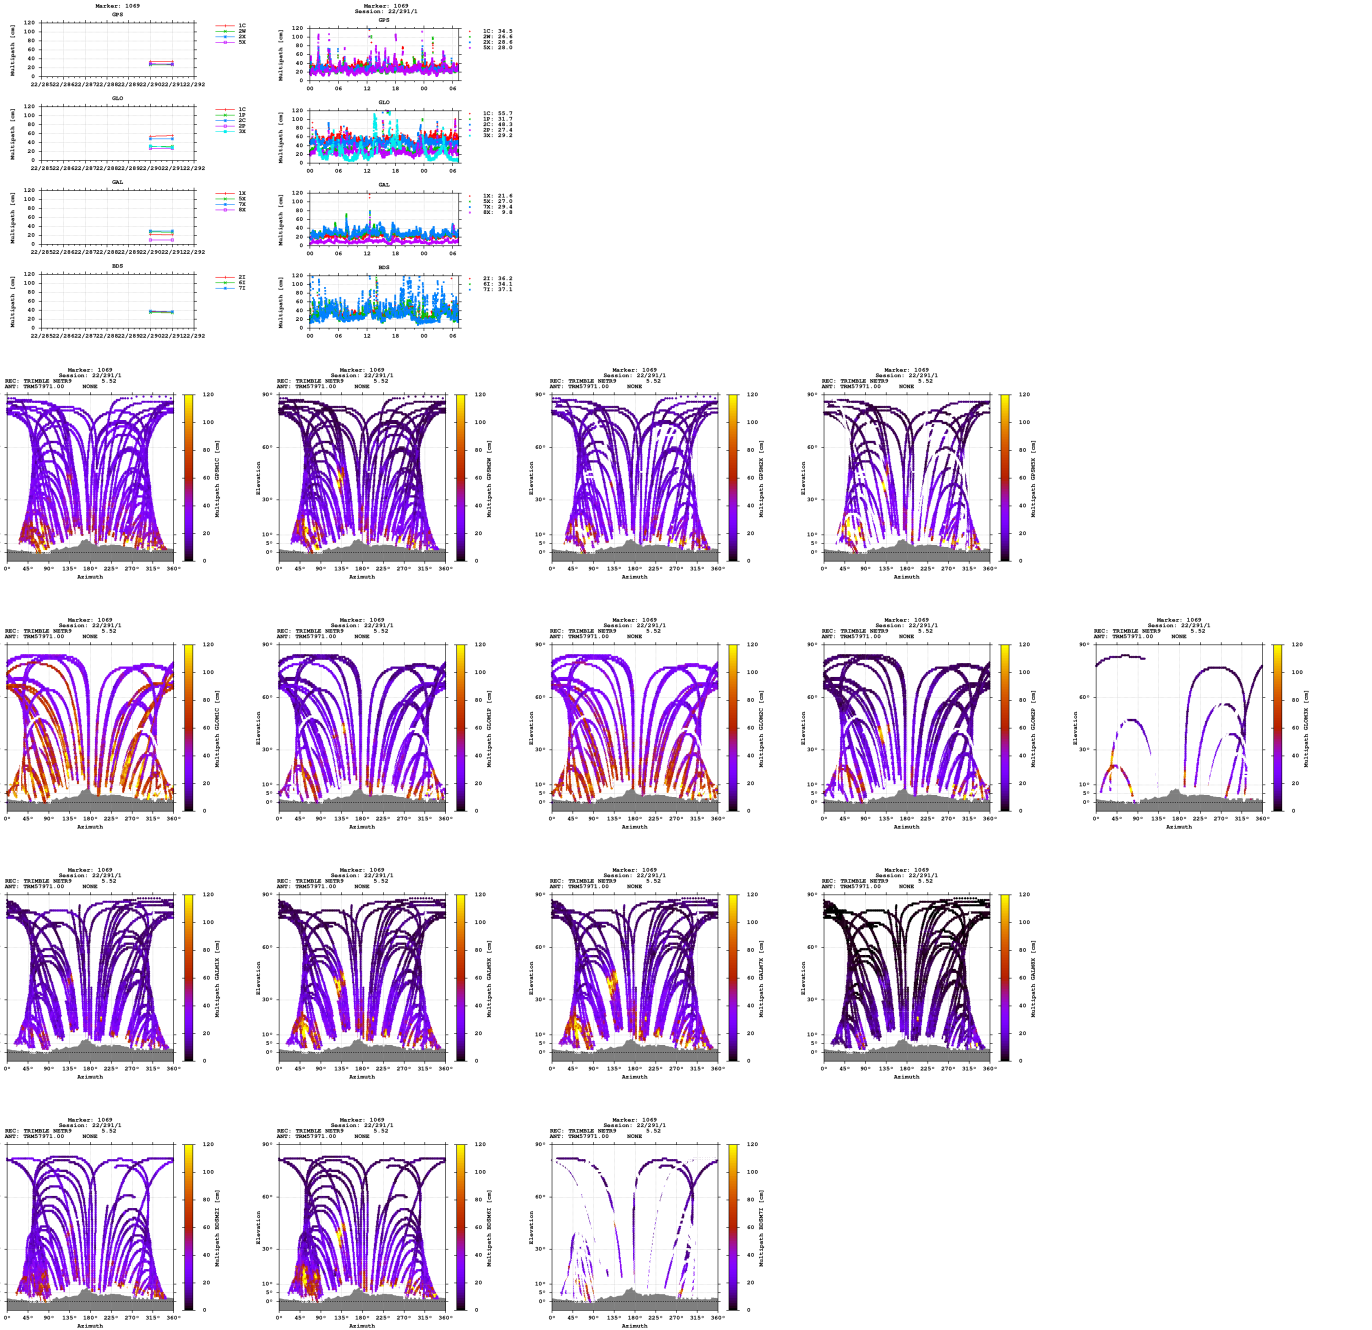


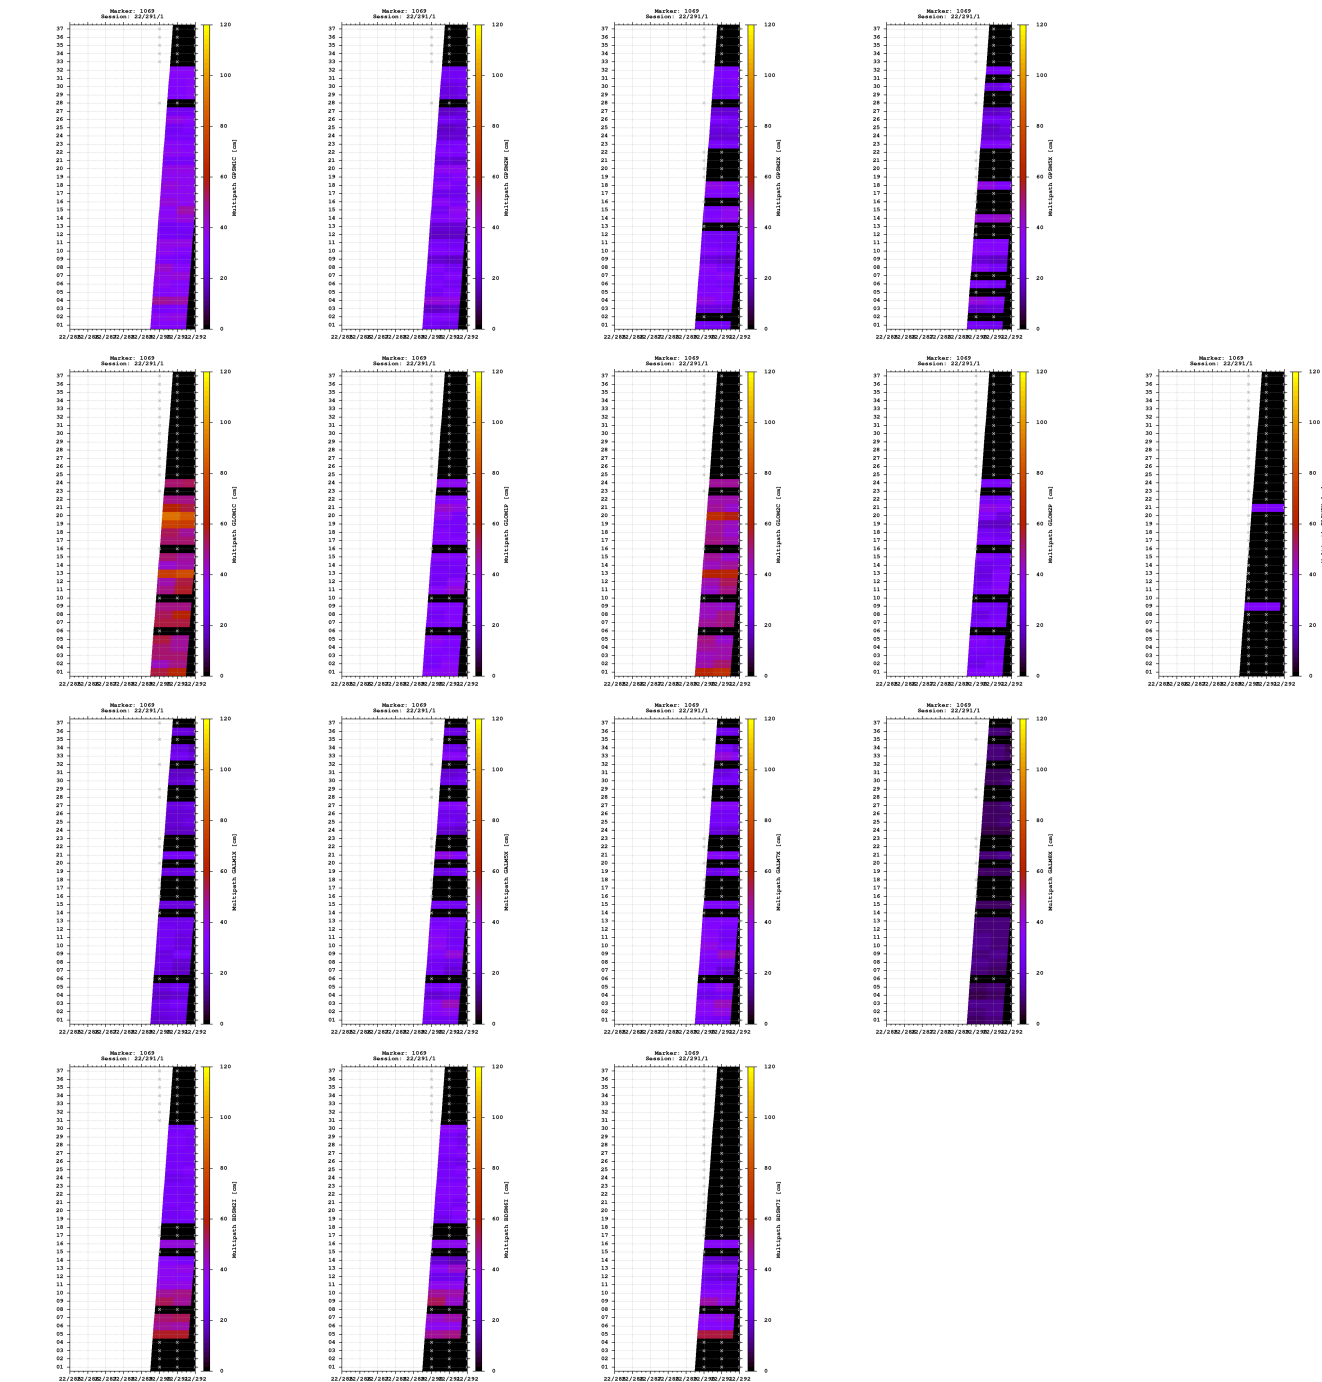


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

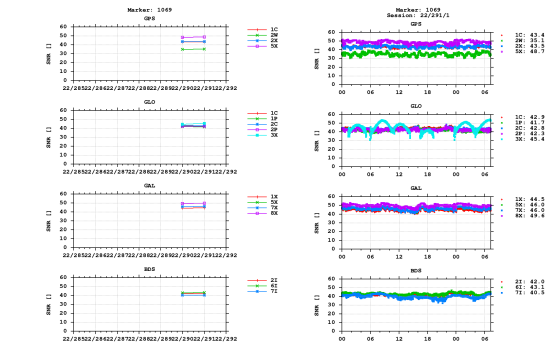


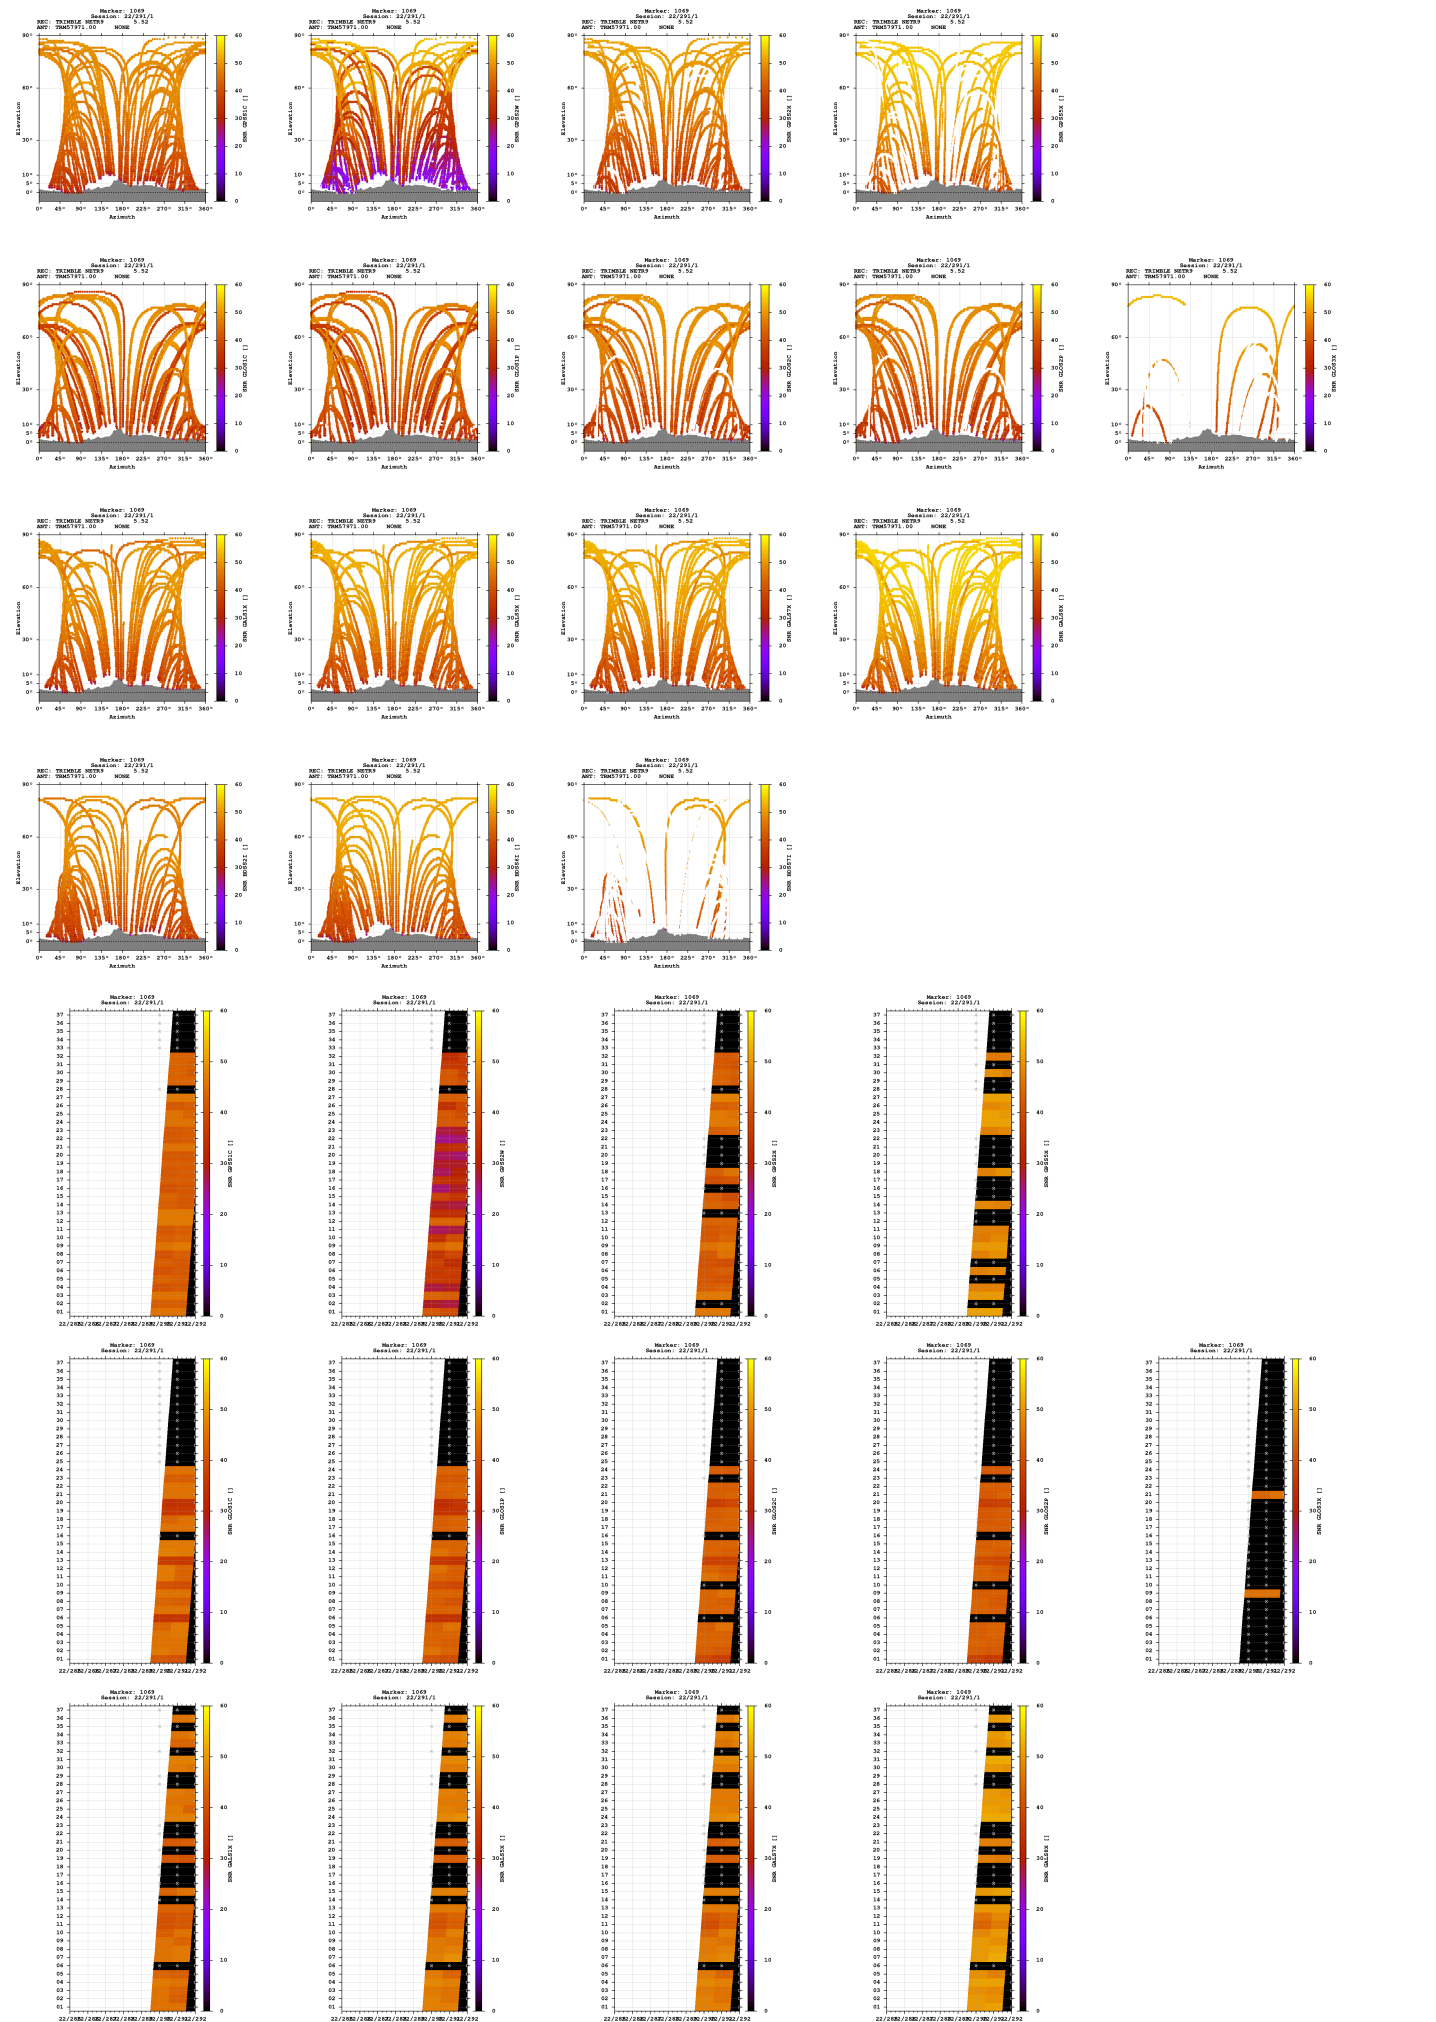

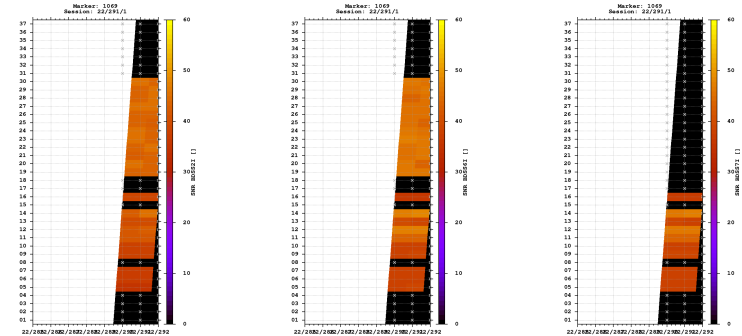



Estimates

2022-10-17 12:41:30	GPS	4277258.0546	603170.4160	4677804.1463	47.471745533	8.026808769	582.4460
2022-10-17 12:41:30	GLO	4277258.3496	603170.3402	4677804.1373	47.471743613	8.026807228	582.6296
2022-10-17 12:41:30	GAL	4277258.0024	603170.2458	4677804.0367	47.471745367	8.026806630	582.3142
2022-10-17 12:41:30	BDS	4277257.2716	603169.6632	4677805.5107	47.471759663	8.026800332	582.8564

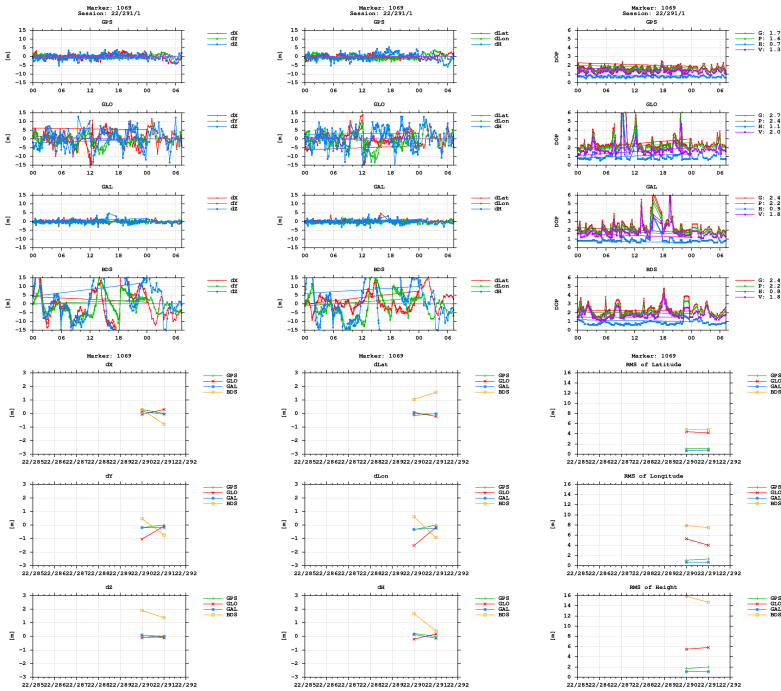

BNC

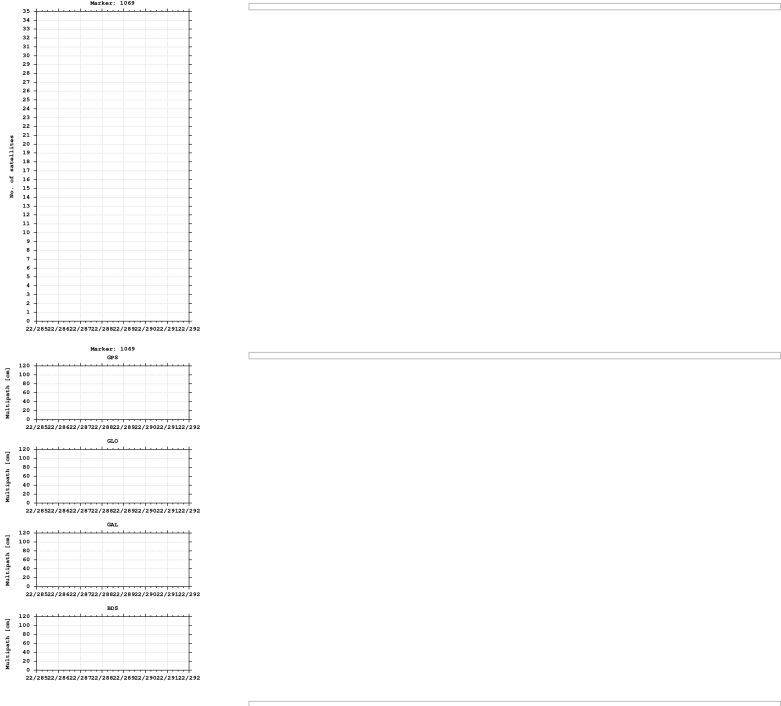

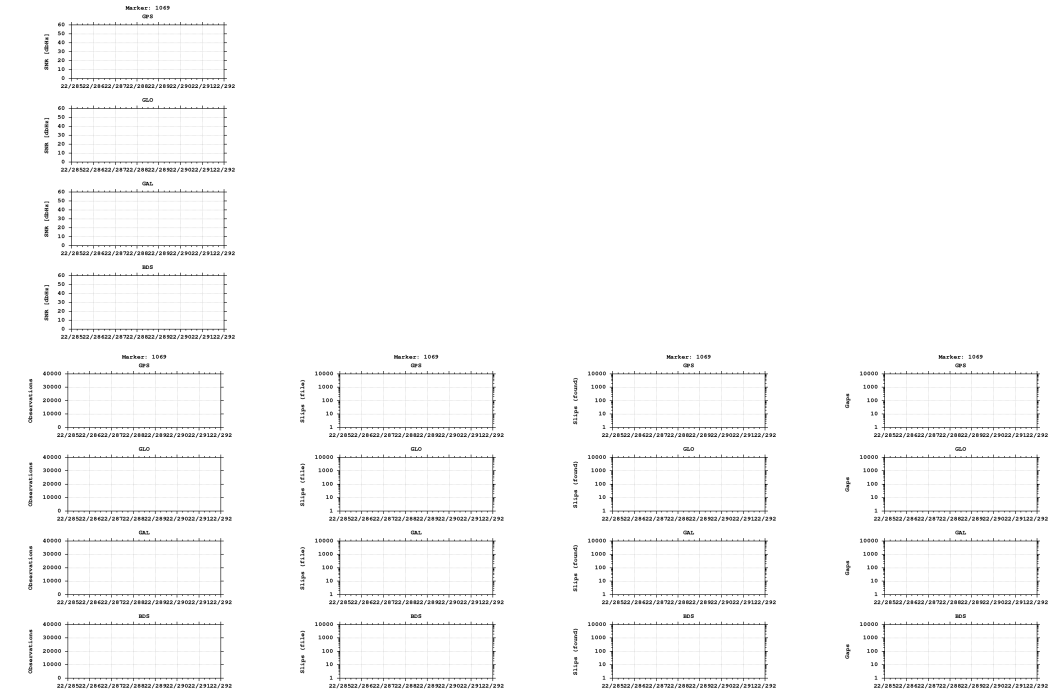

Equipment

2022-10-17 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 519

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)