


GNSS observation file monitoring for 0518


Last RINEX file: 05182911.22O
RINEX version: 3.02
Marker: 1050
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

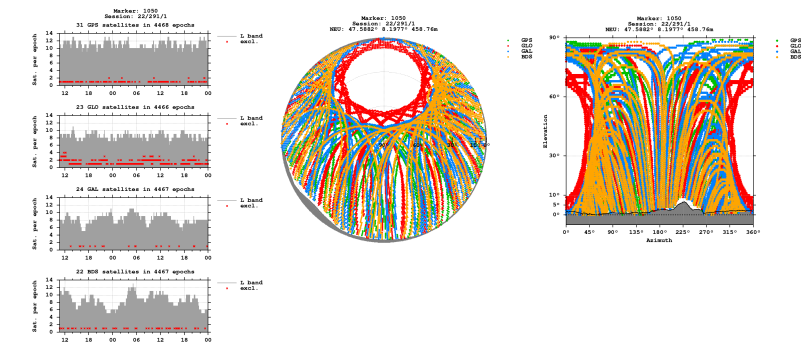


Bands

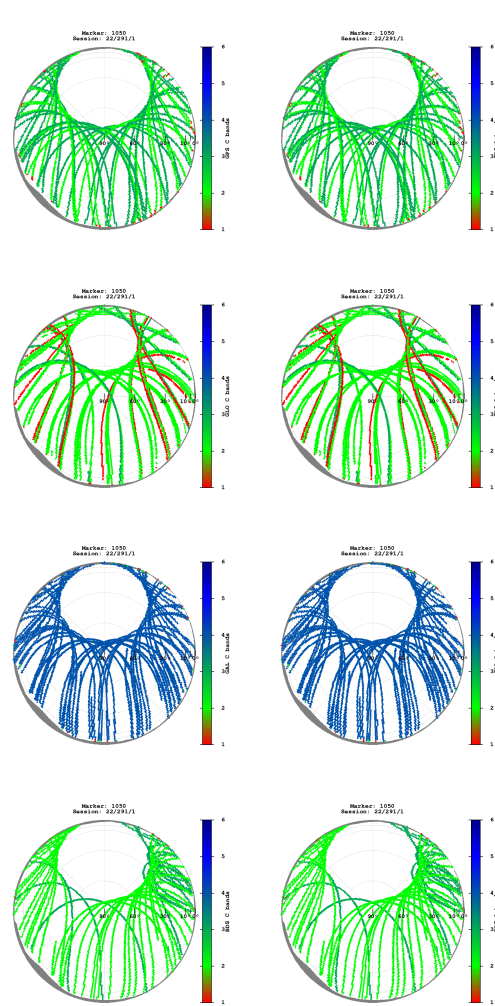

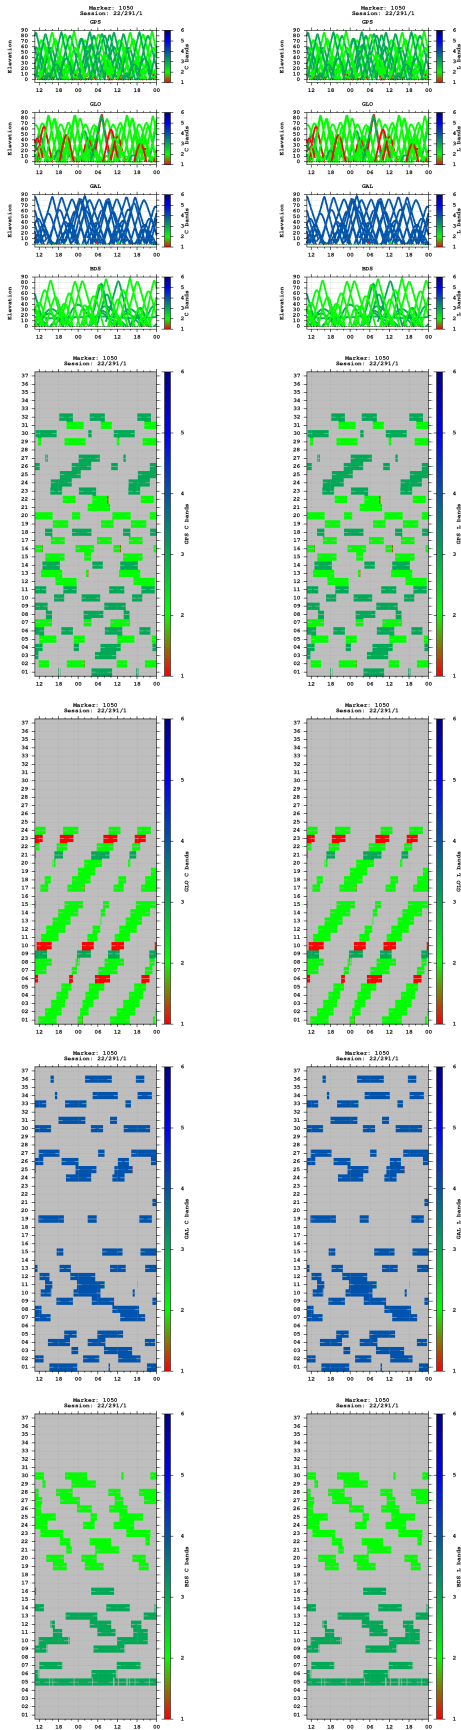



Multipath

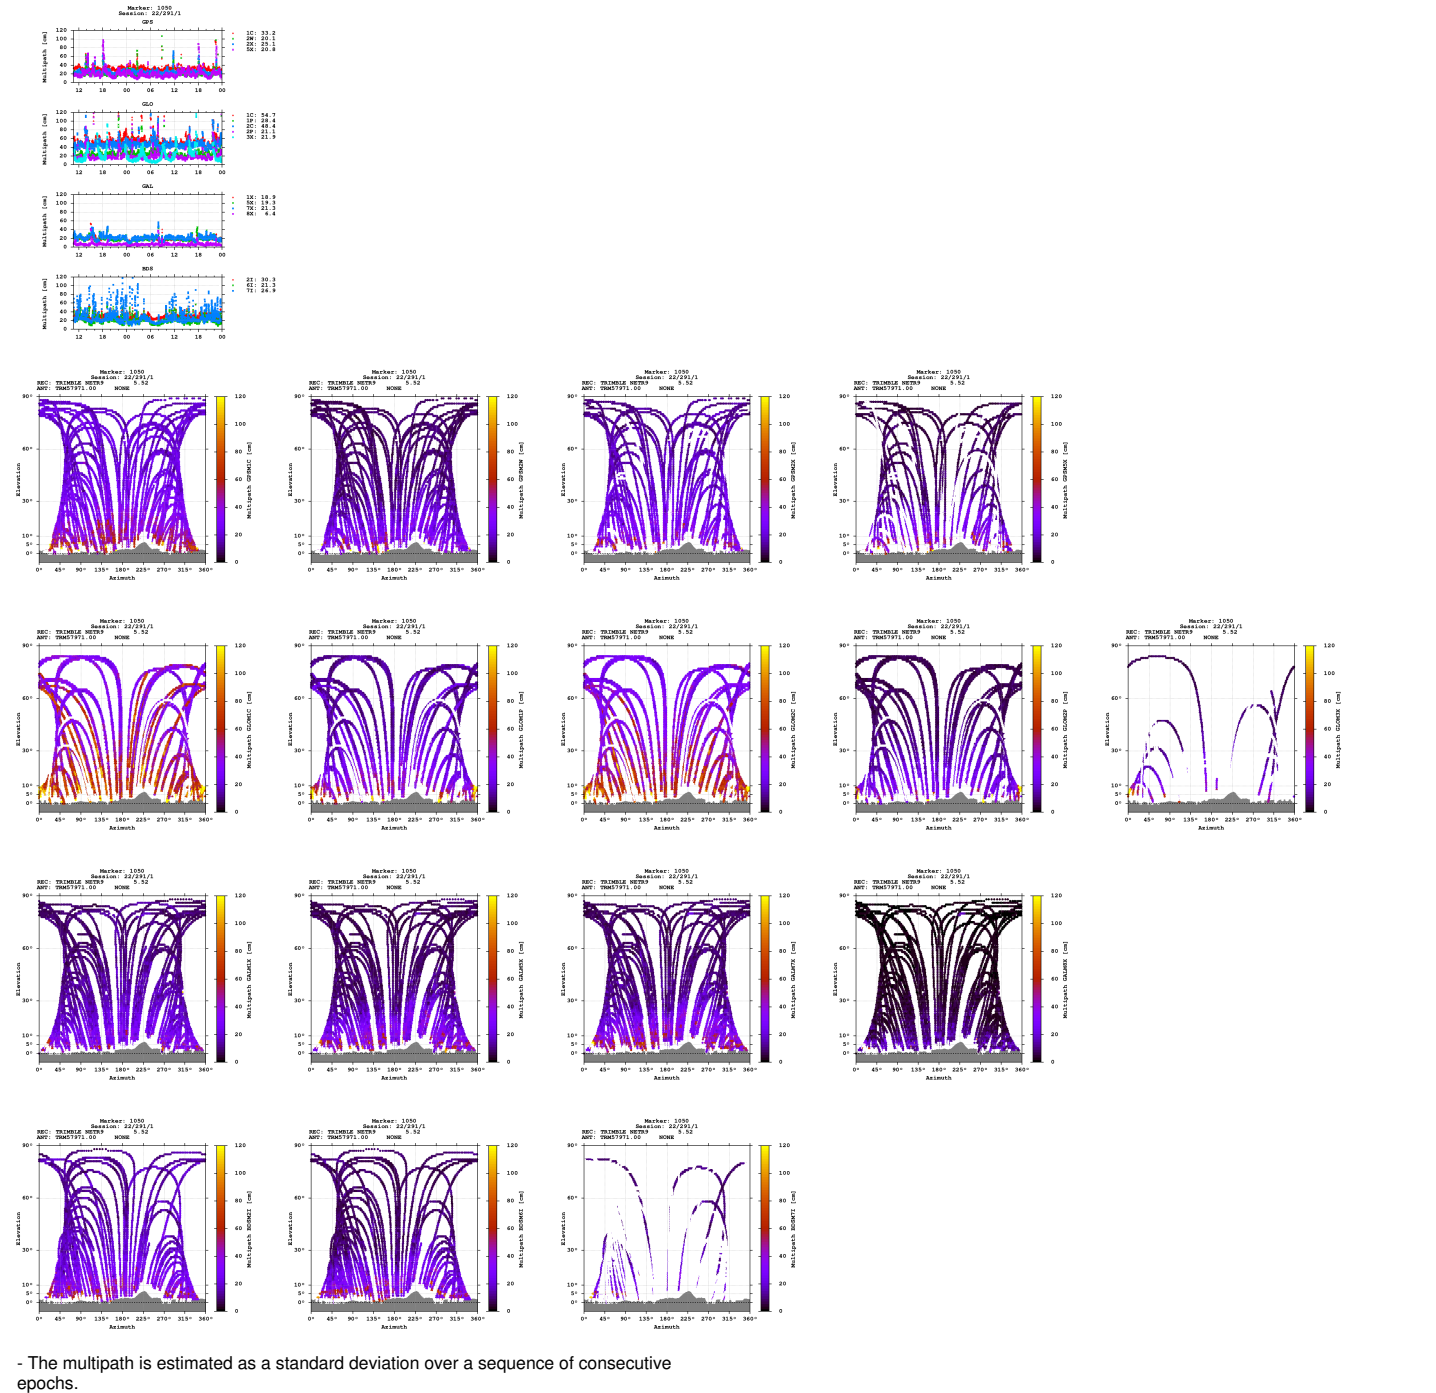

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

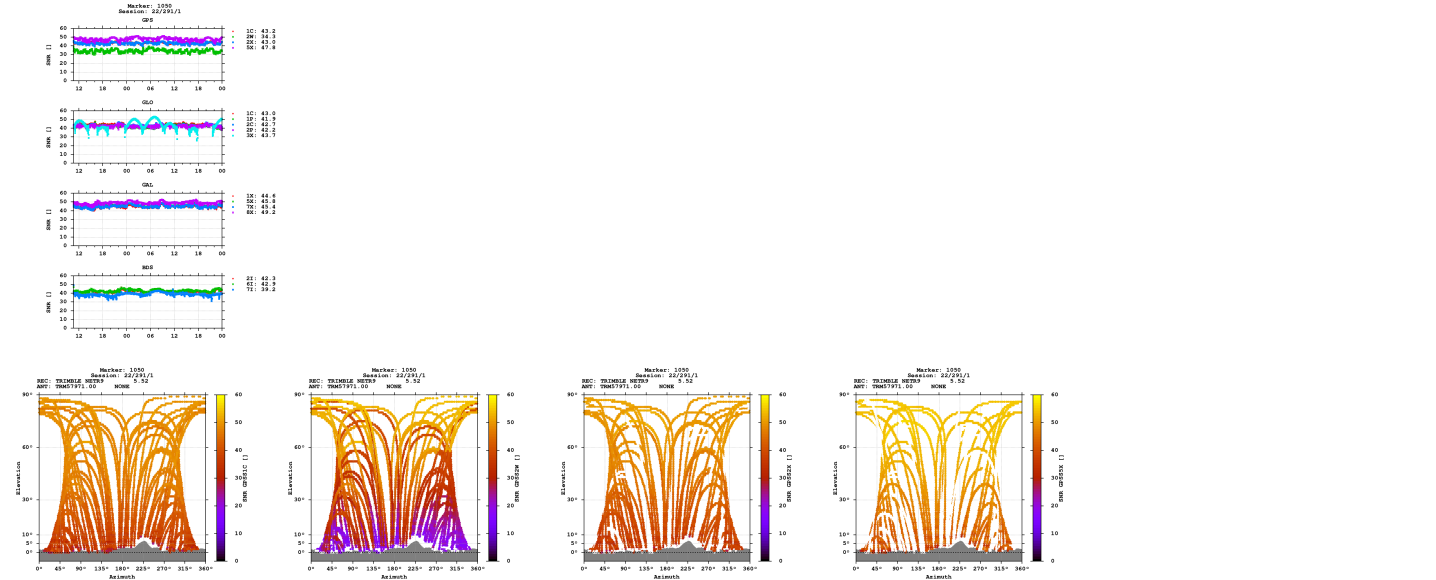

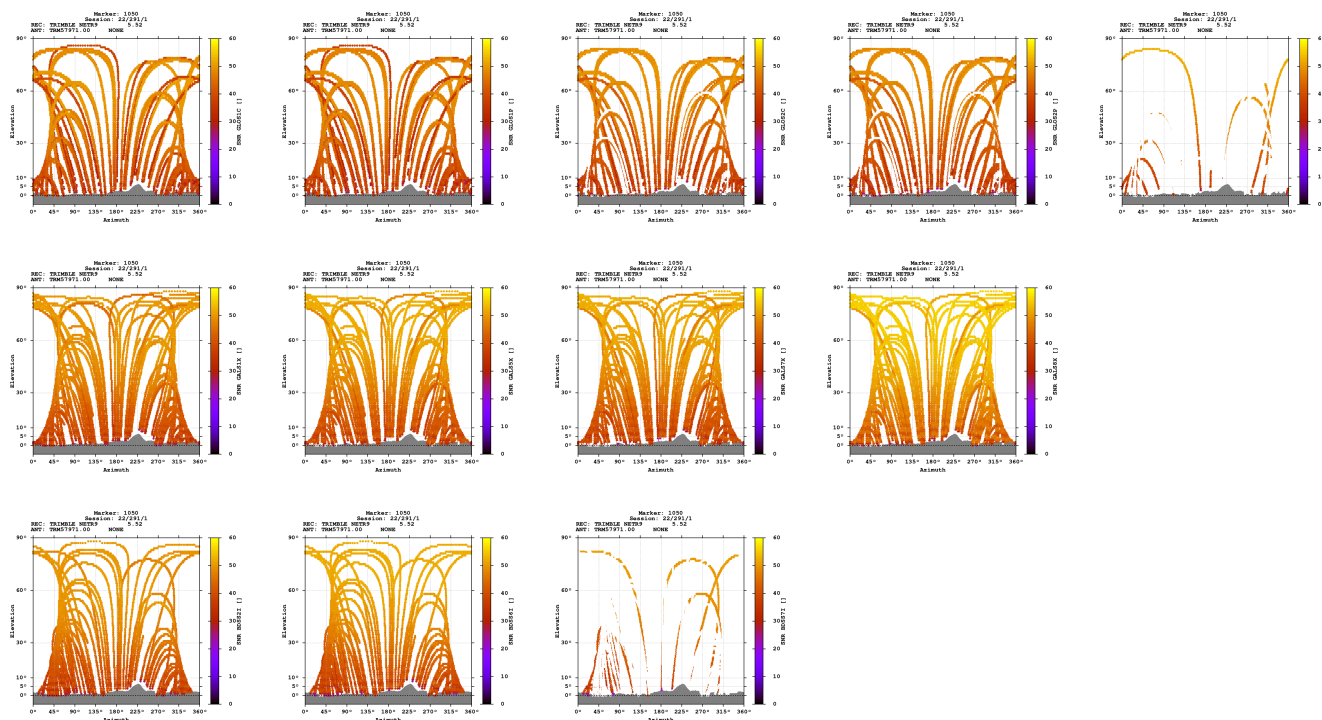

Estimates

2022-10-18 10:42:00	GPS	4265906.7178	614551.9622	4686453.0102	47.588161964	8.197702801	458.7584
2022-10-18 10:42:00	GLO	4265906.8629	614551.5704	4686452.7779	47.588159972	8.197697371	458.6461
2022-10-18 10:42:00	GAL	4265906.3658	614551.8650	4686452.6783	47.588162355	8.197702189	458.2691
2022-10-18 10:42:00	BDS	4265905.6034	614551.9295	4686453.9833	47.588175221	8.197704483	458.7297

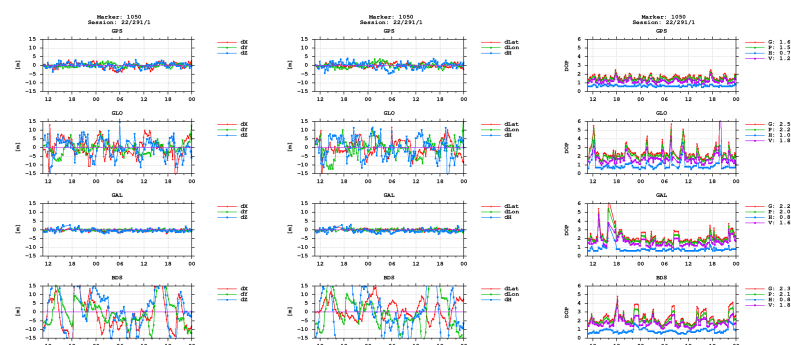

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)