

# GNSS observation file monitoring for 0518

Last RINEX file: 05182921.220


RINEX version: 3.02

Marker: 1050

Receiver: 518 TRIMBLE NETR9 5.52


Antenna: 518 TRM57971.00 NONE

## Epochs

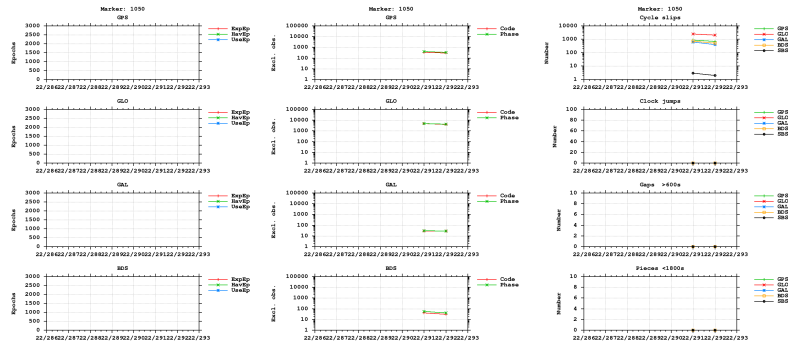



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


## Satellites

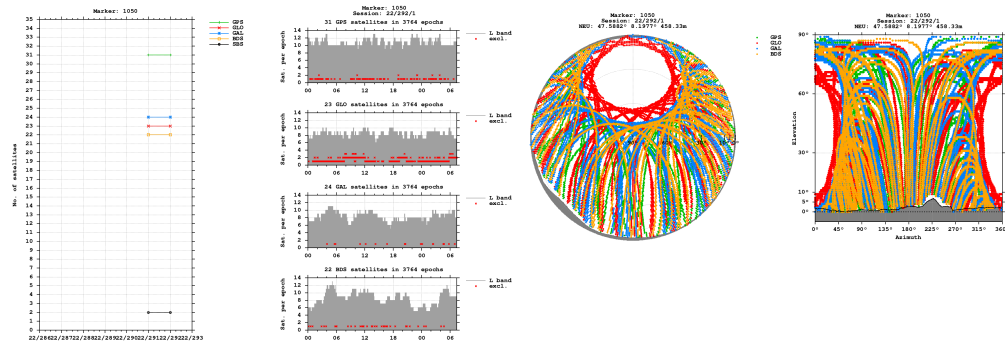


## Bands

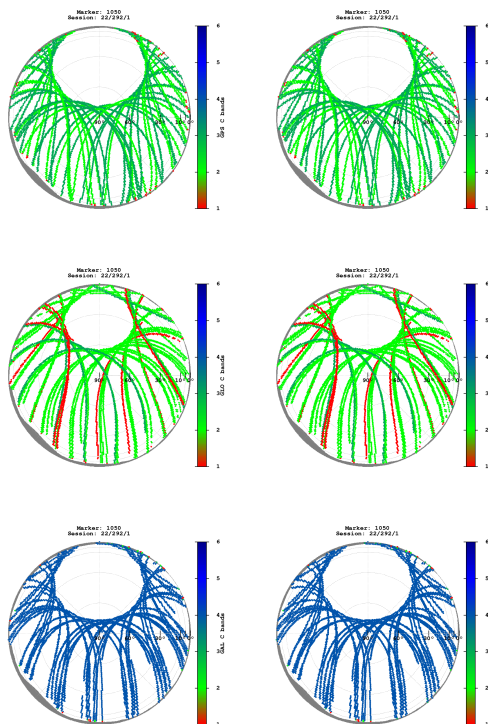


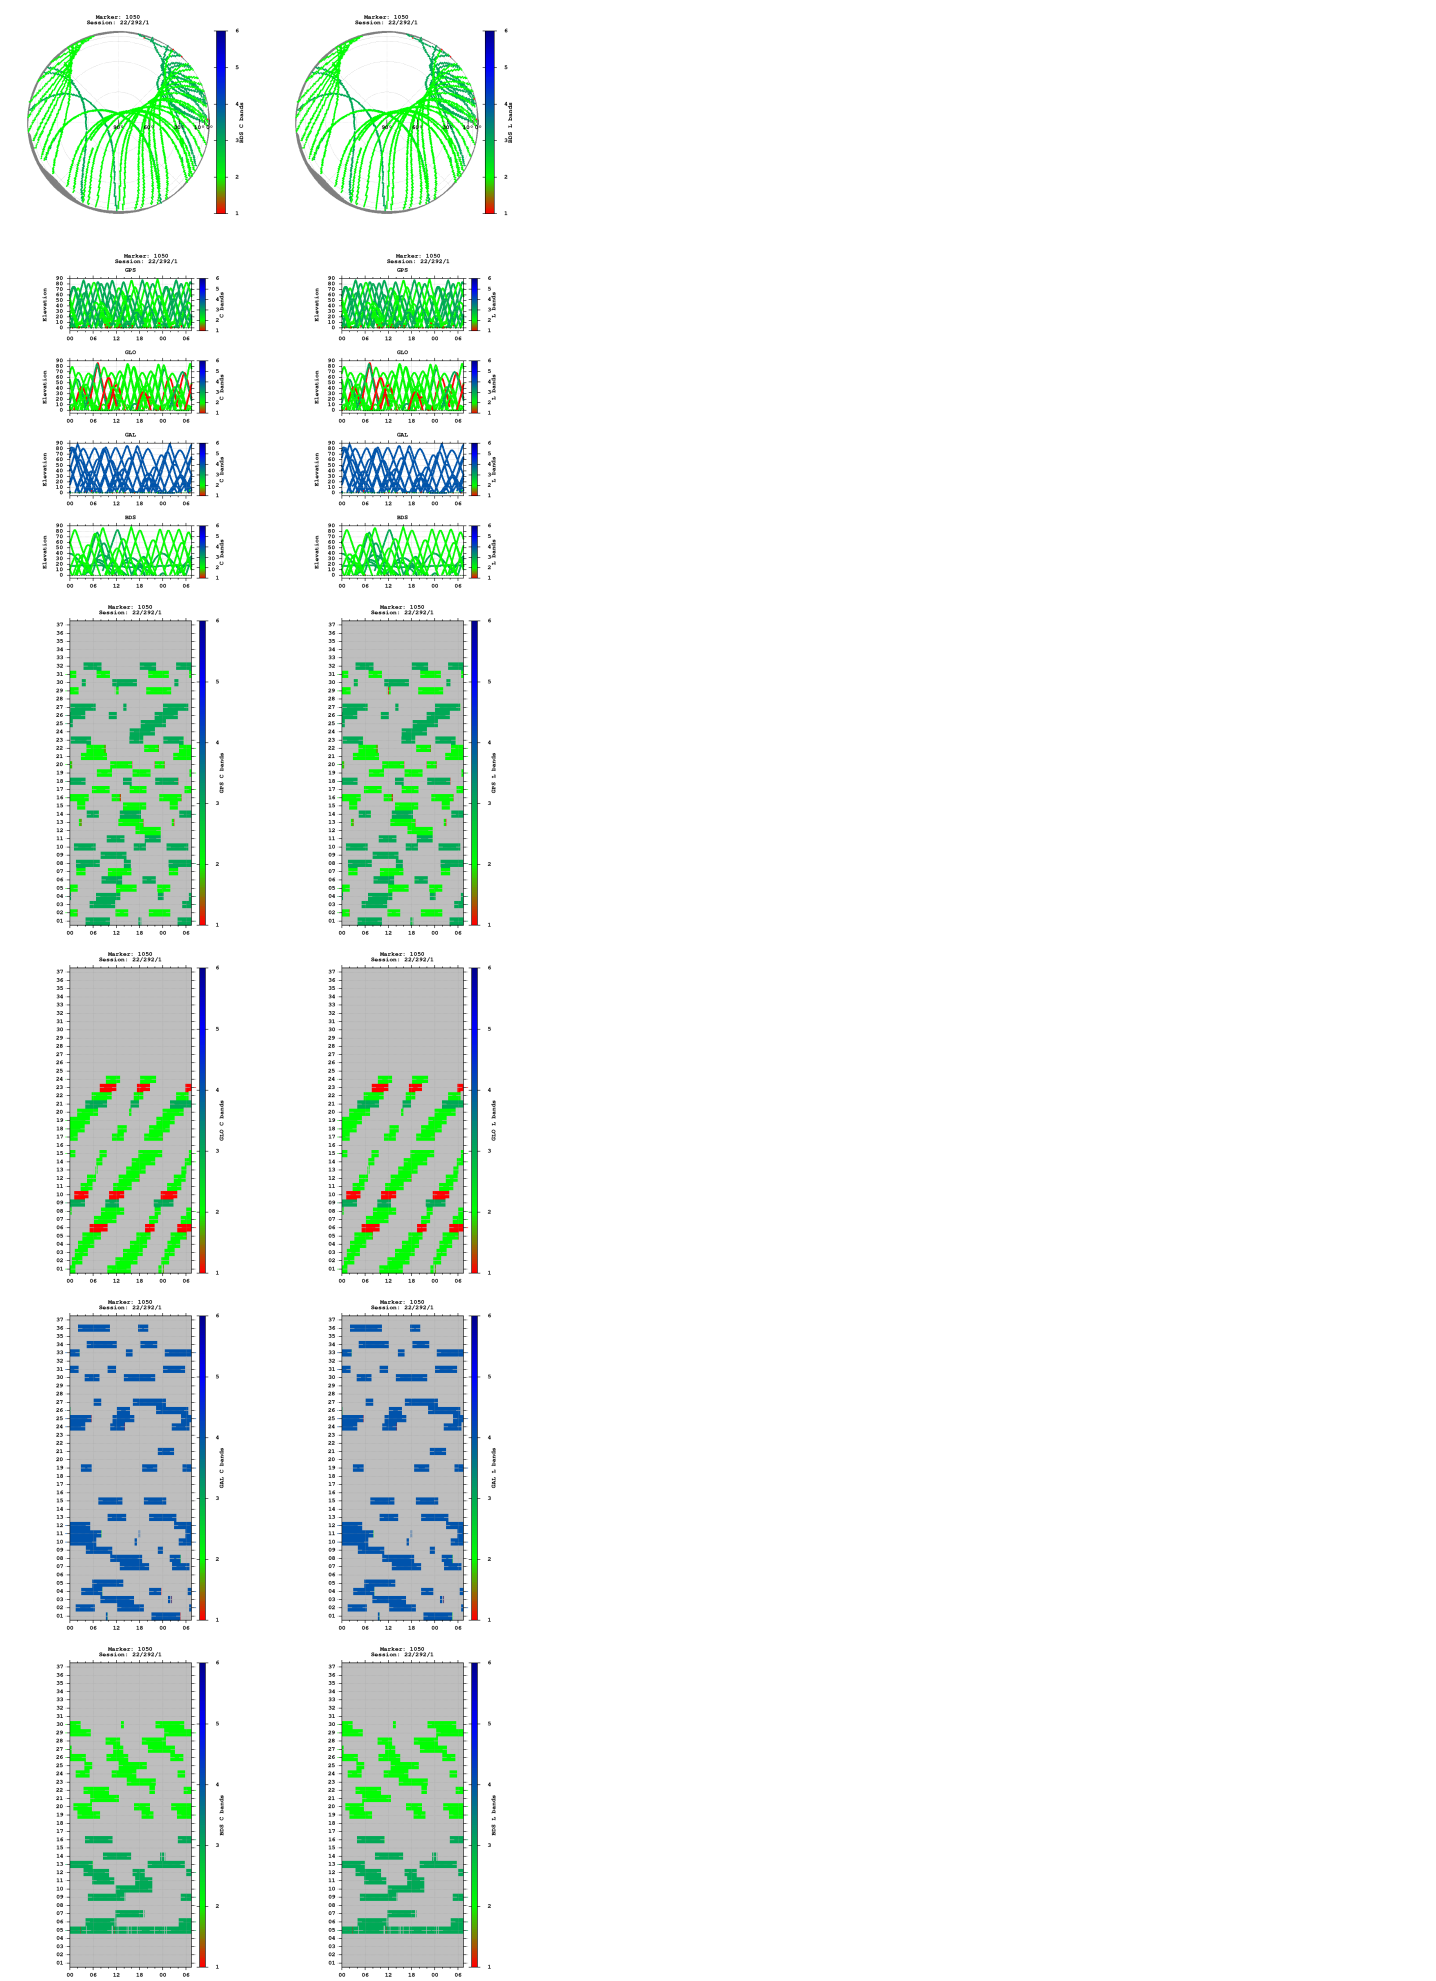

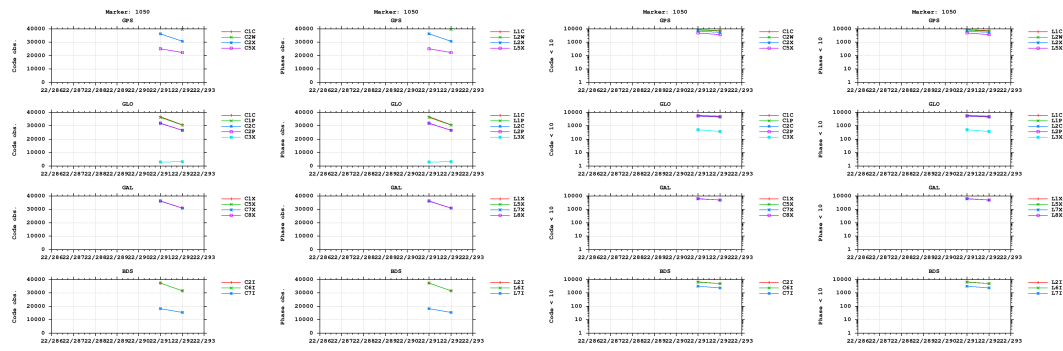


## Multipath

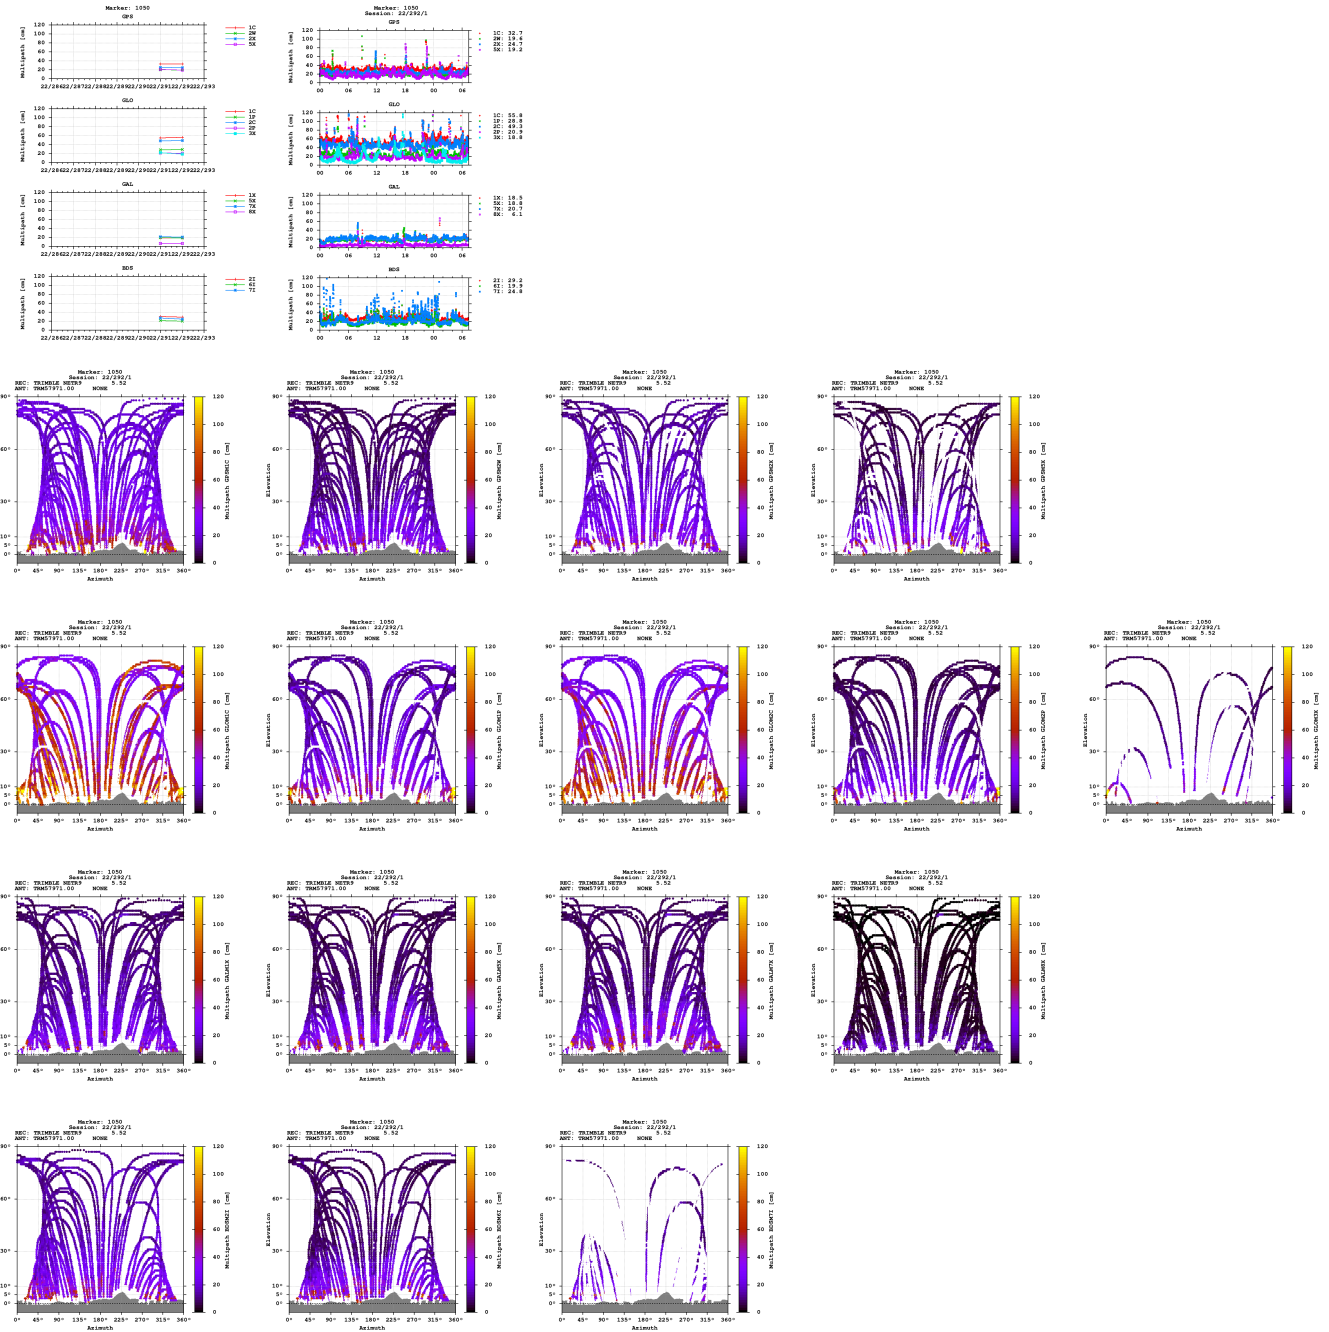


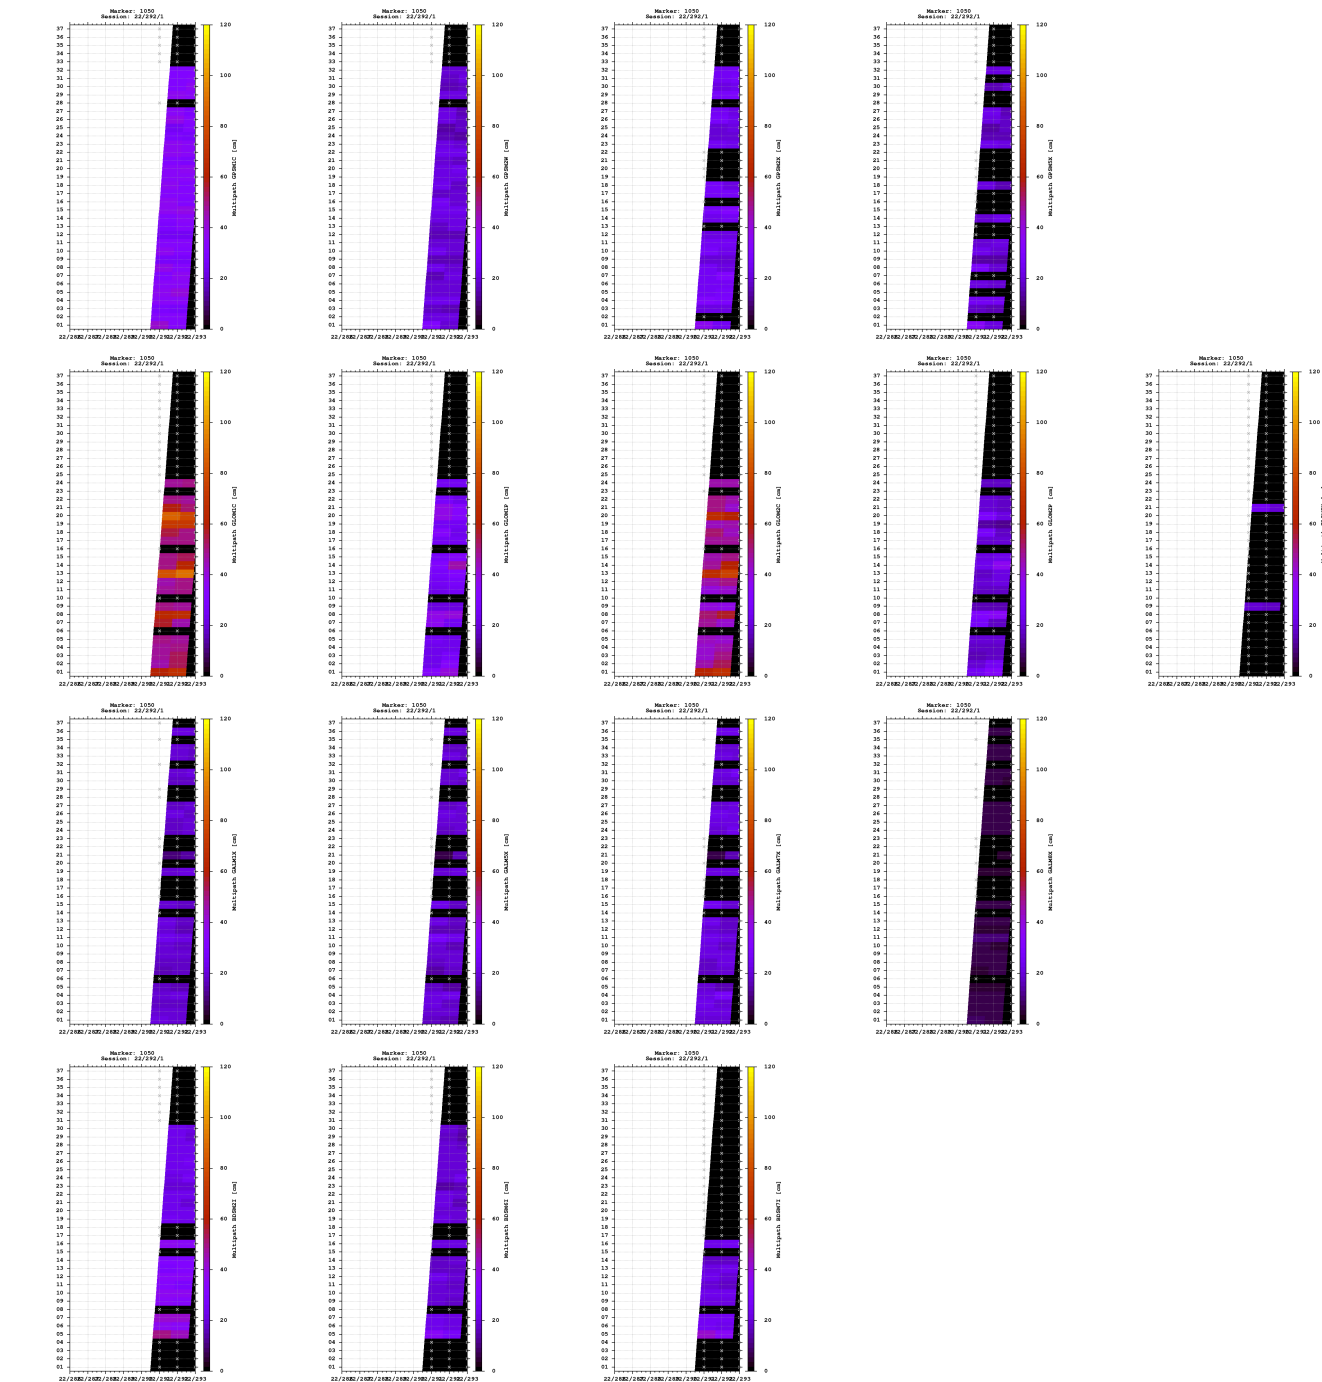

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

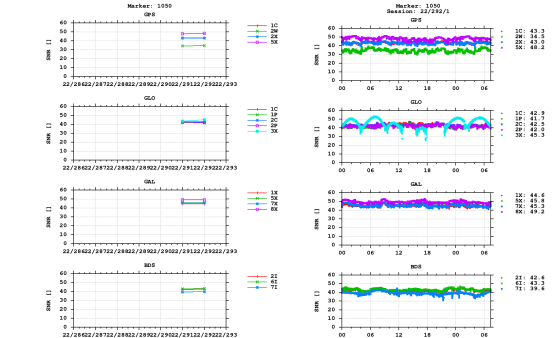


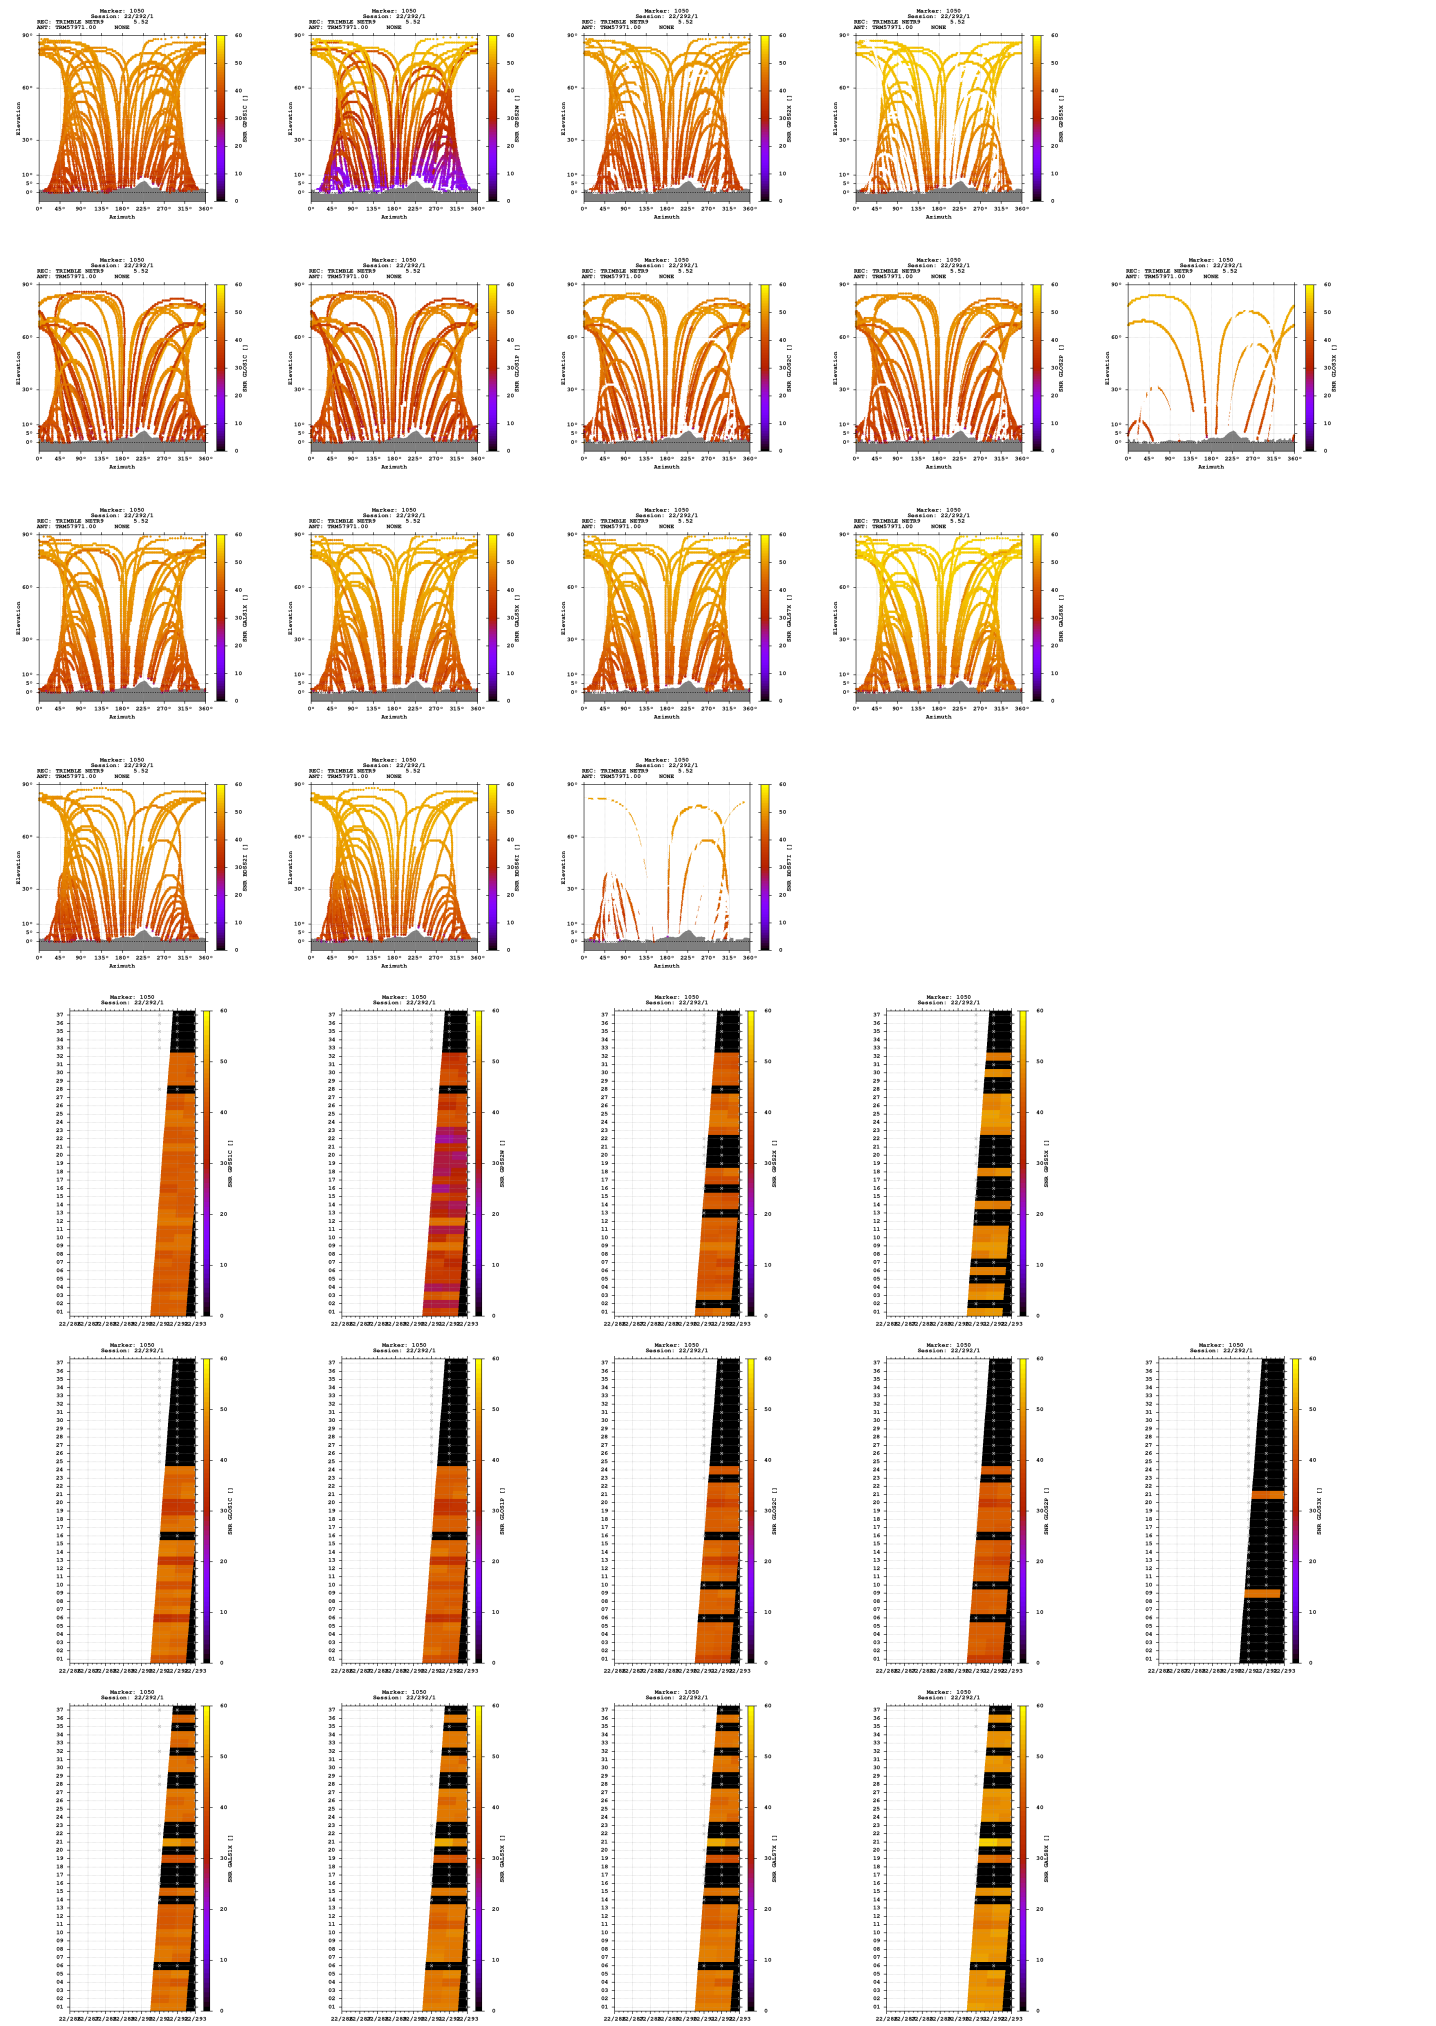



**BNC**



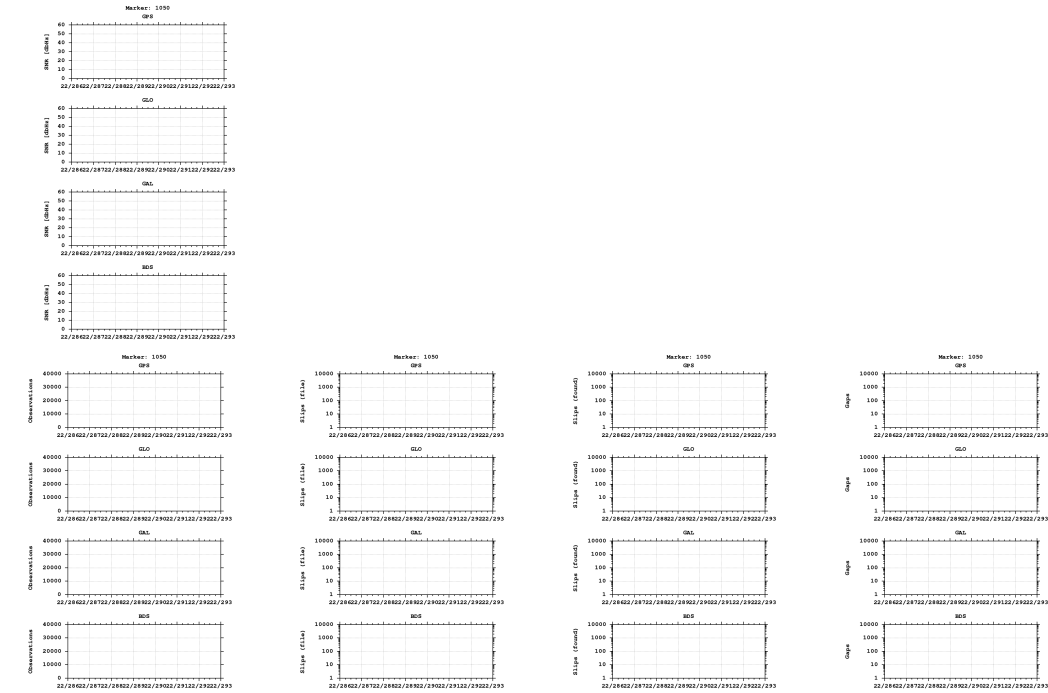

Equipment

2022-10-18 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)  
BNC 2.13.0 (checkout 9163)