

GNSS observation file monitoring for 0515

Last RINEX file: 05152991.220

RINEX version: 3.02

Marker: 1307

Receiver: 515

Antenna: 515


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

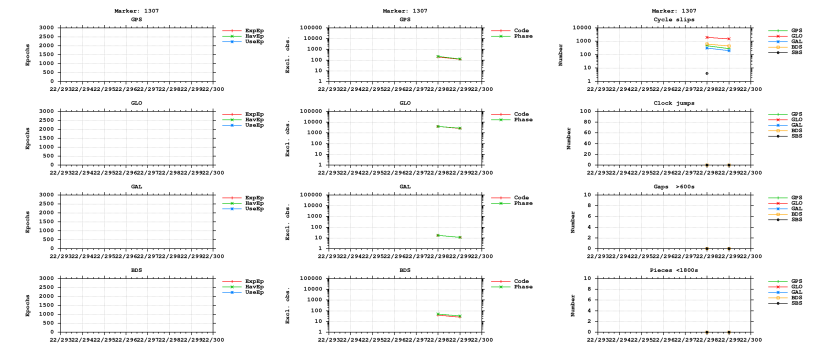



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

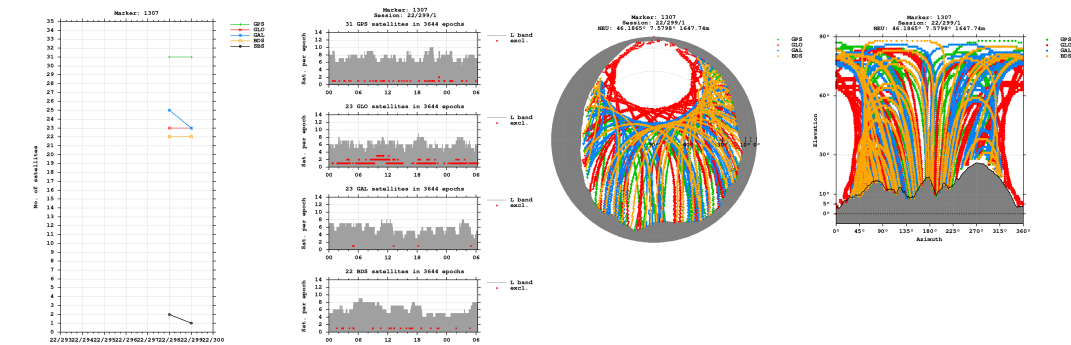


Bands

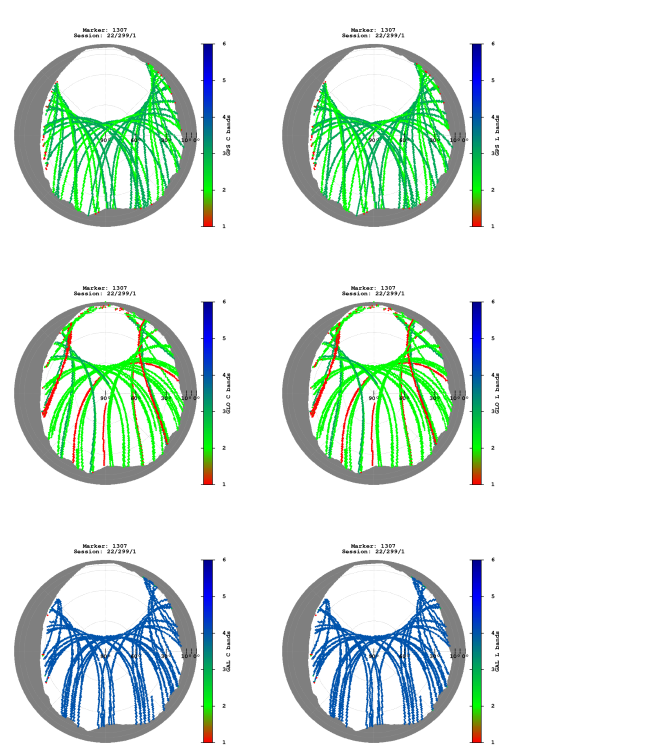


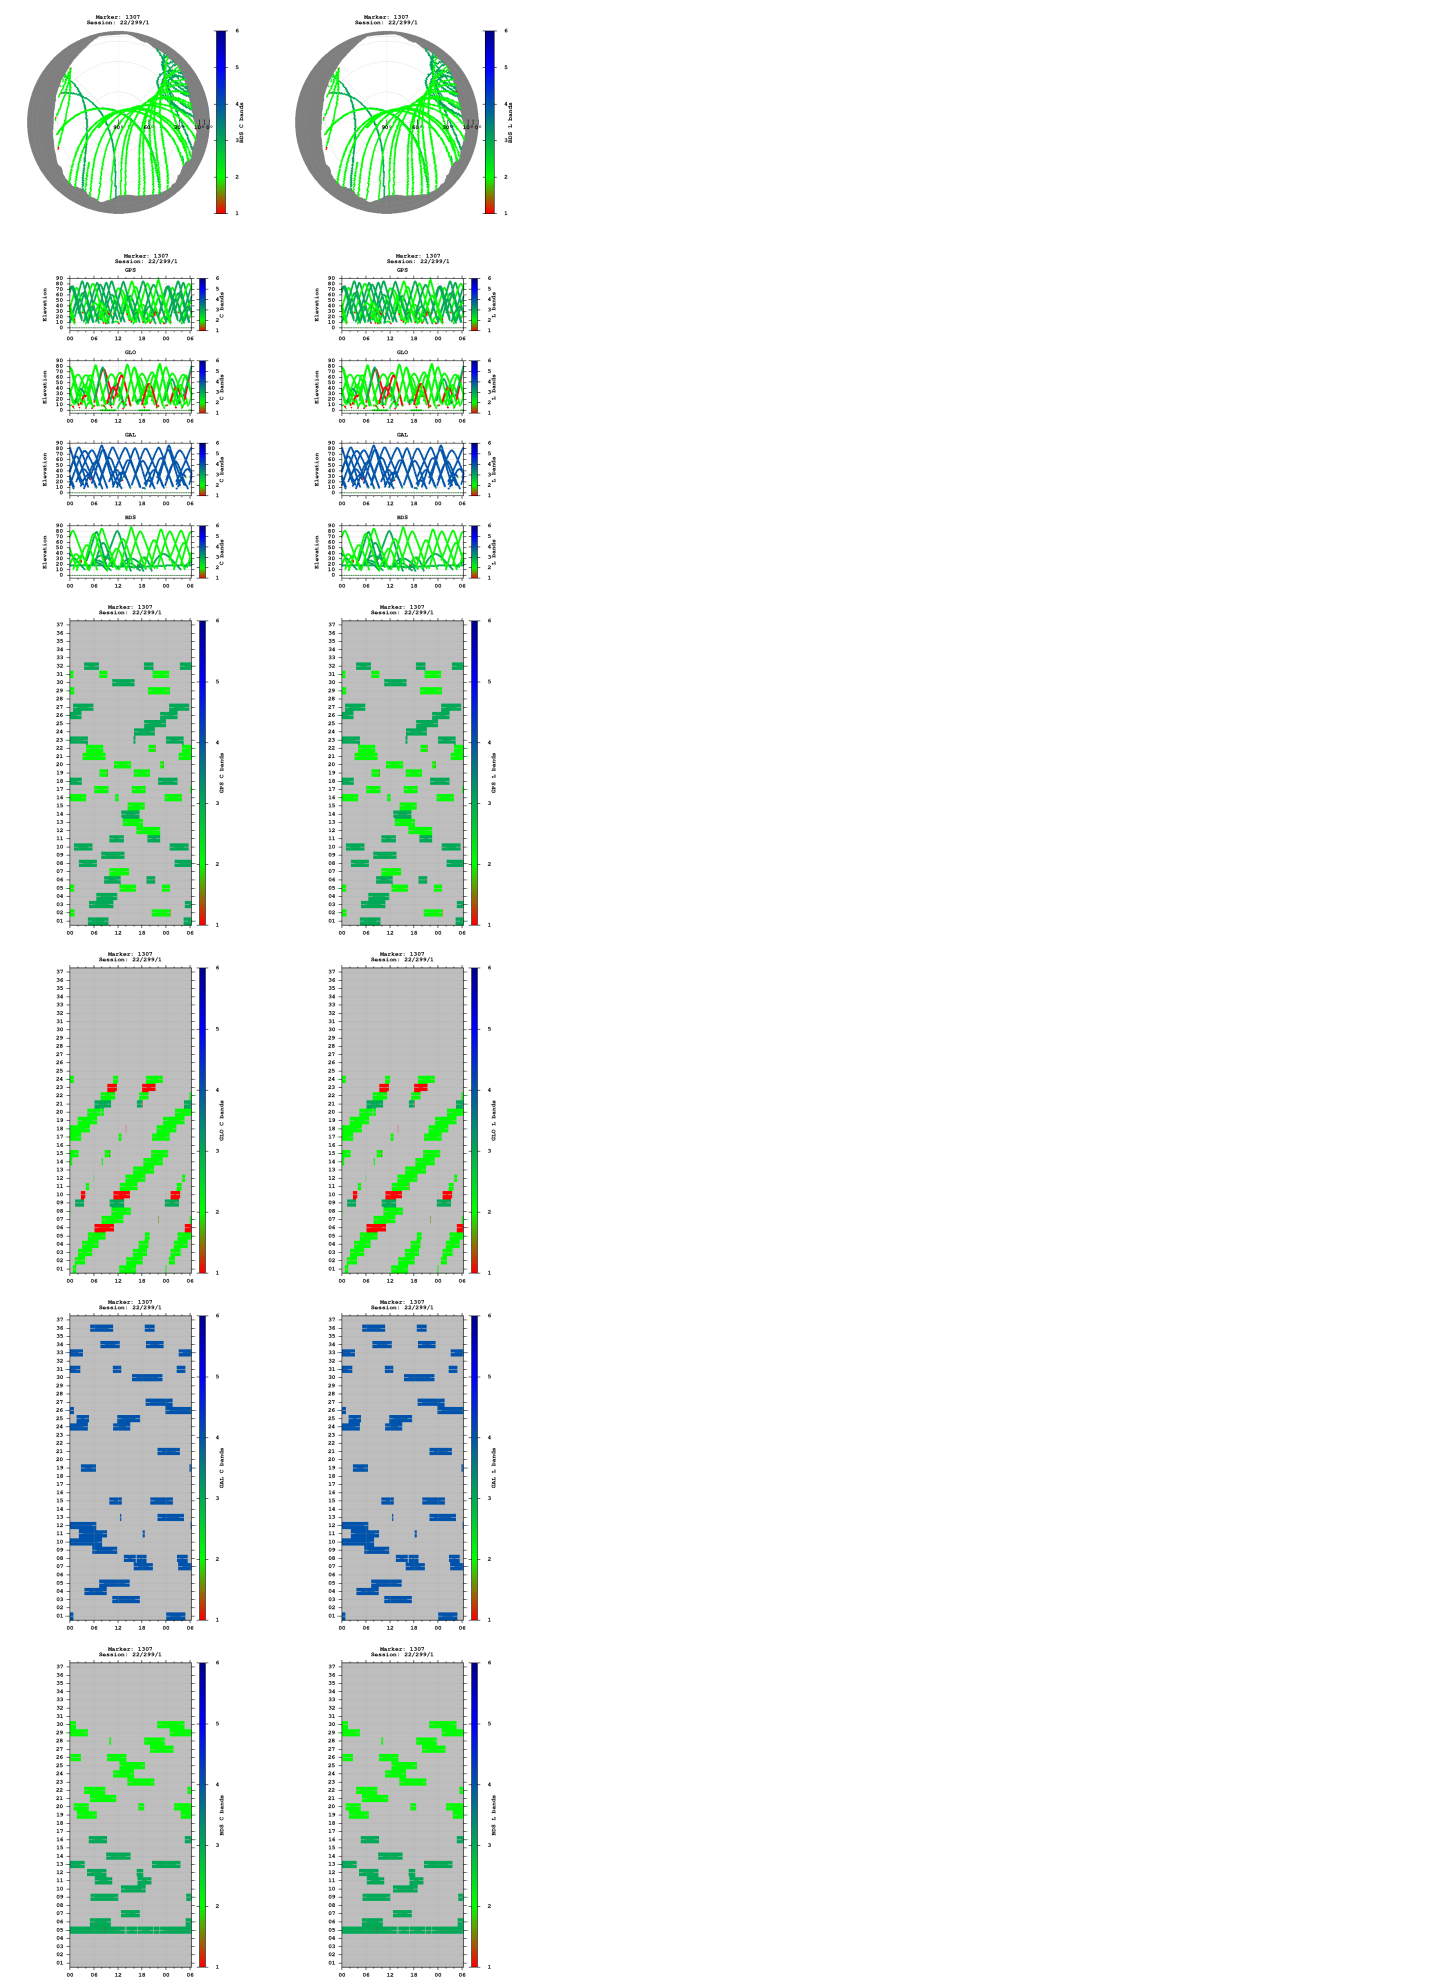


Observations

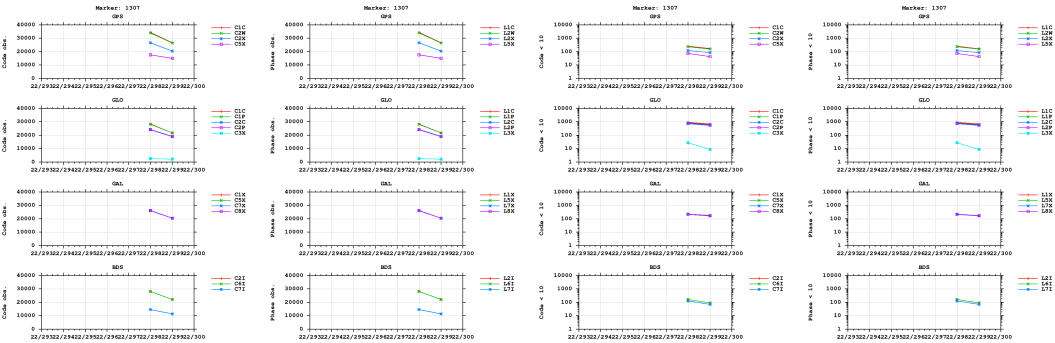


Multipath

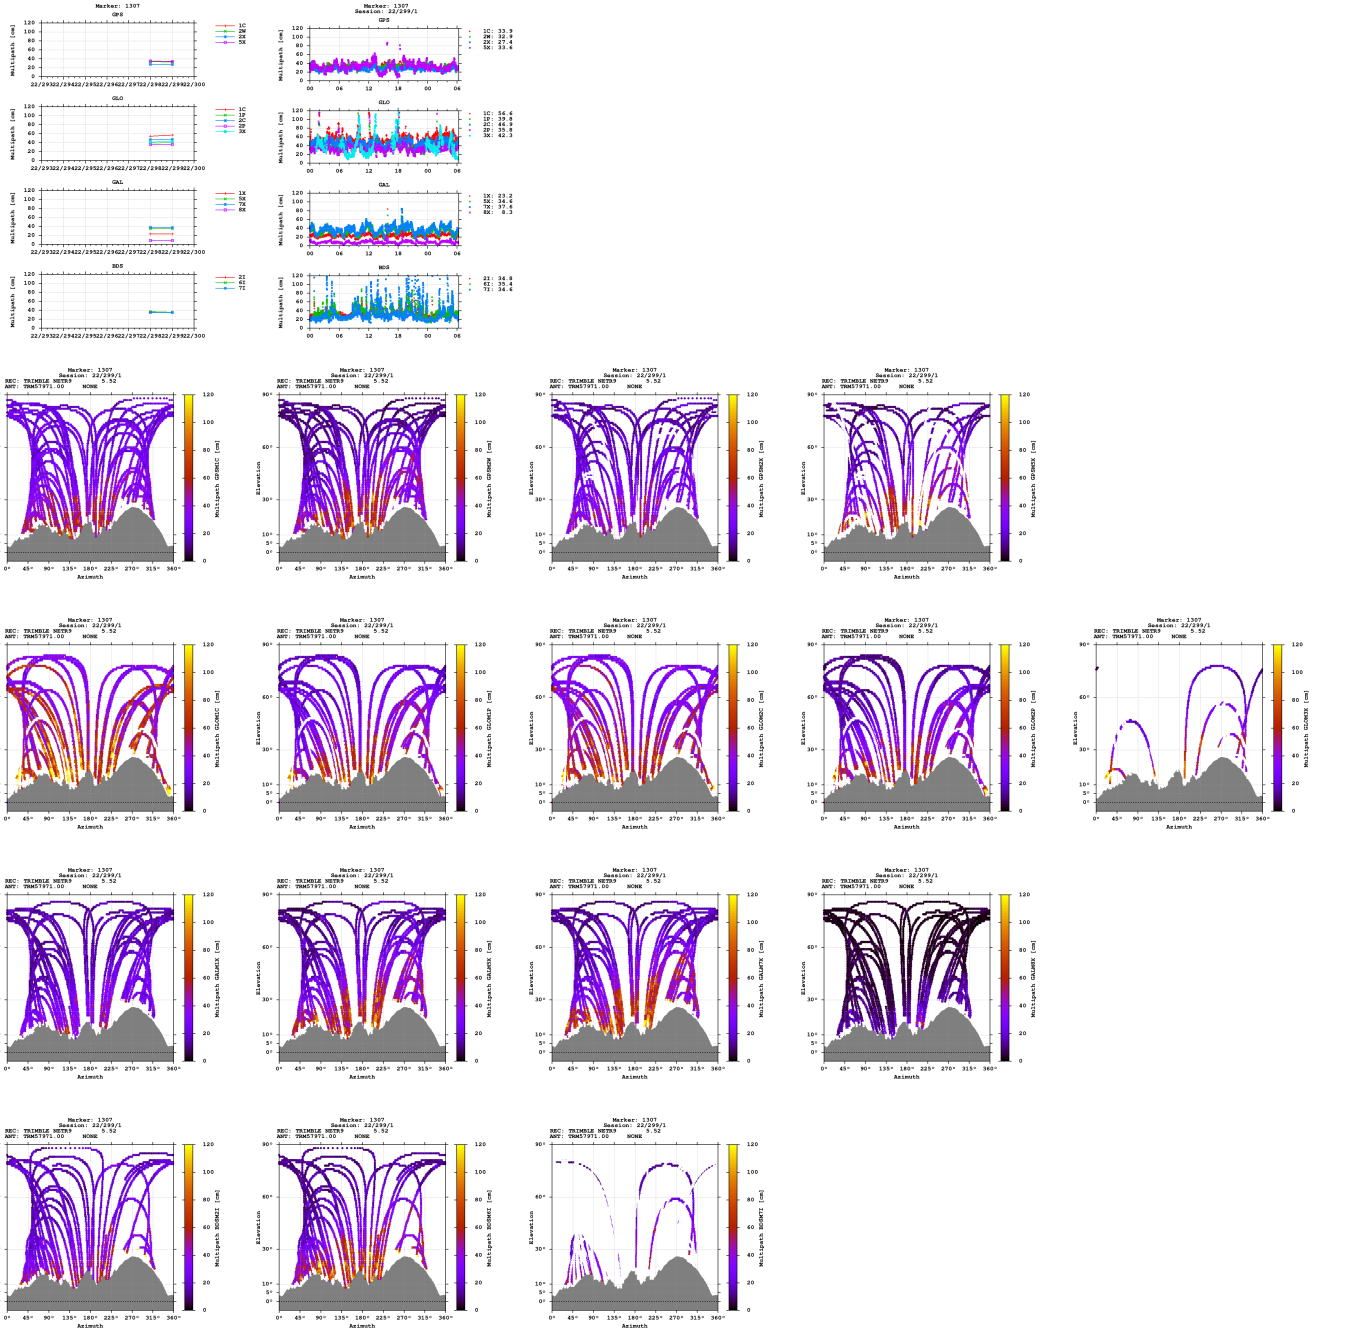


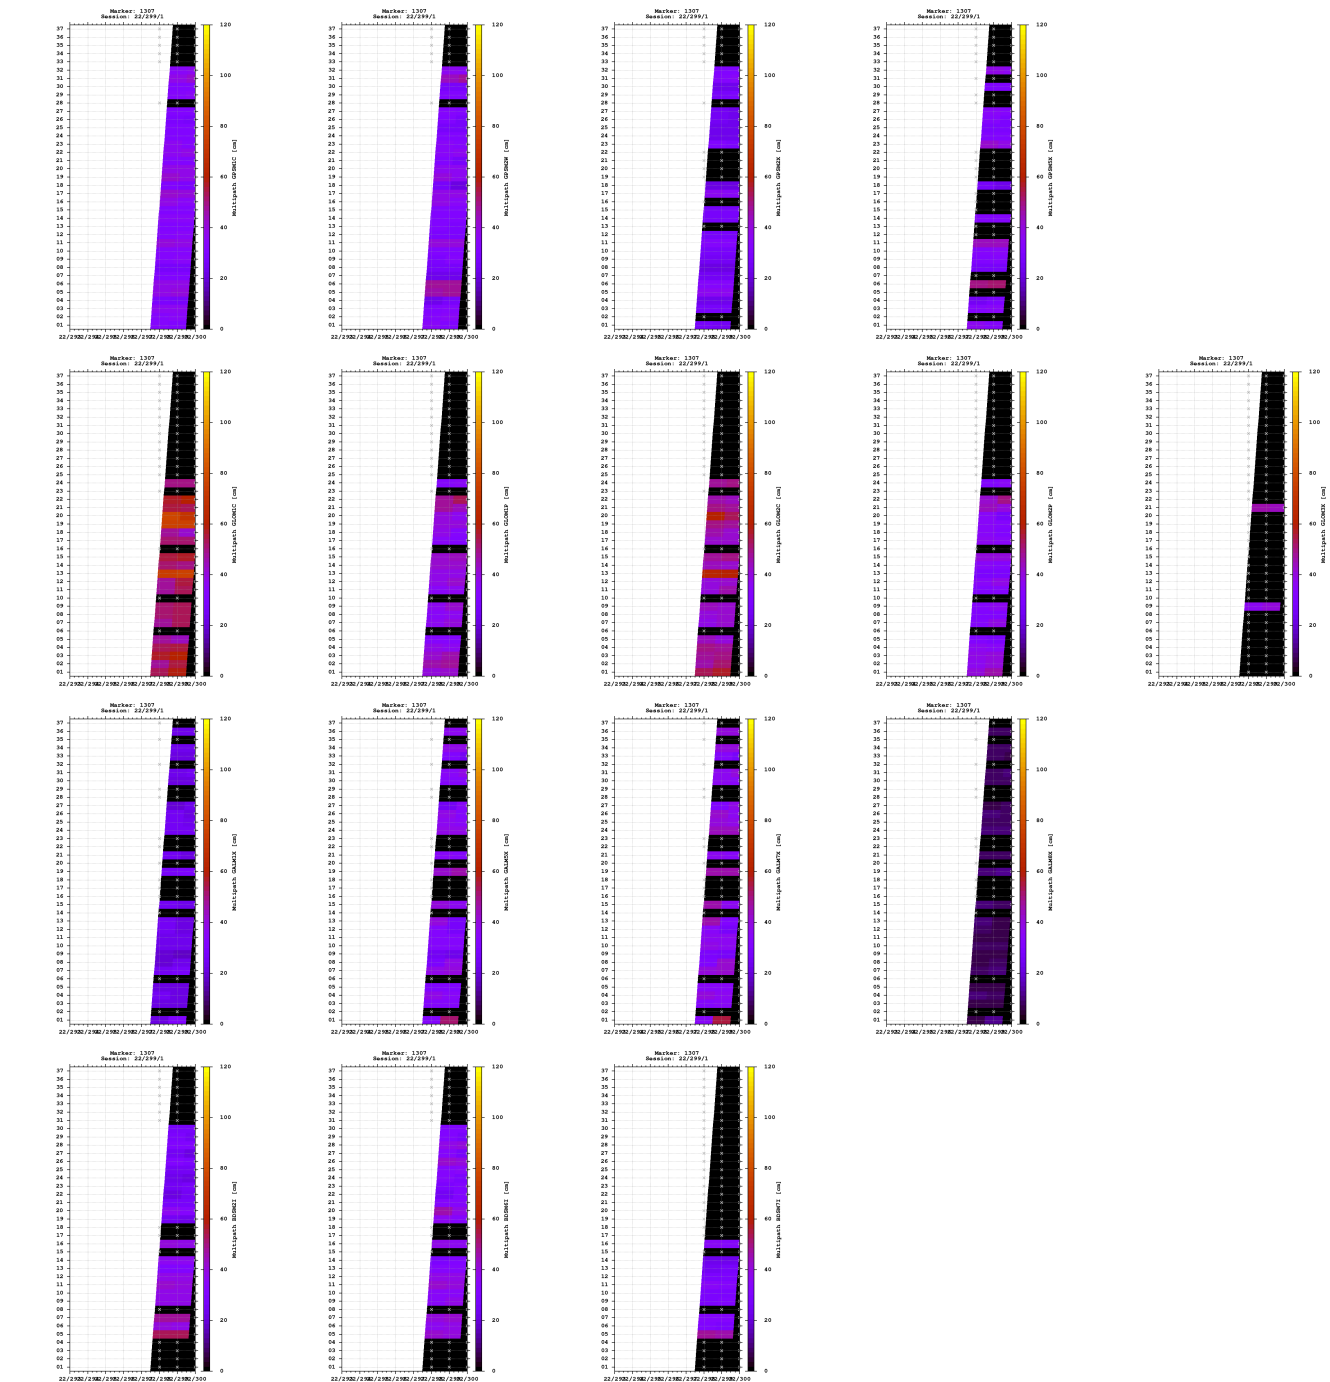


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

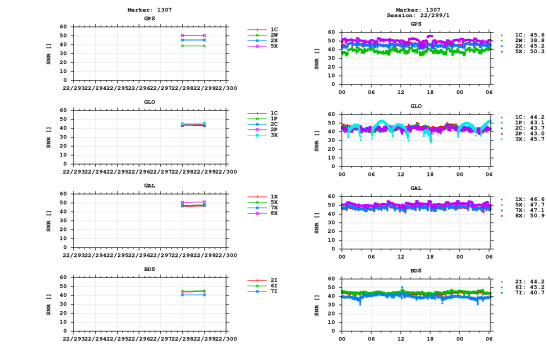


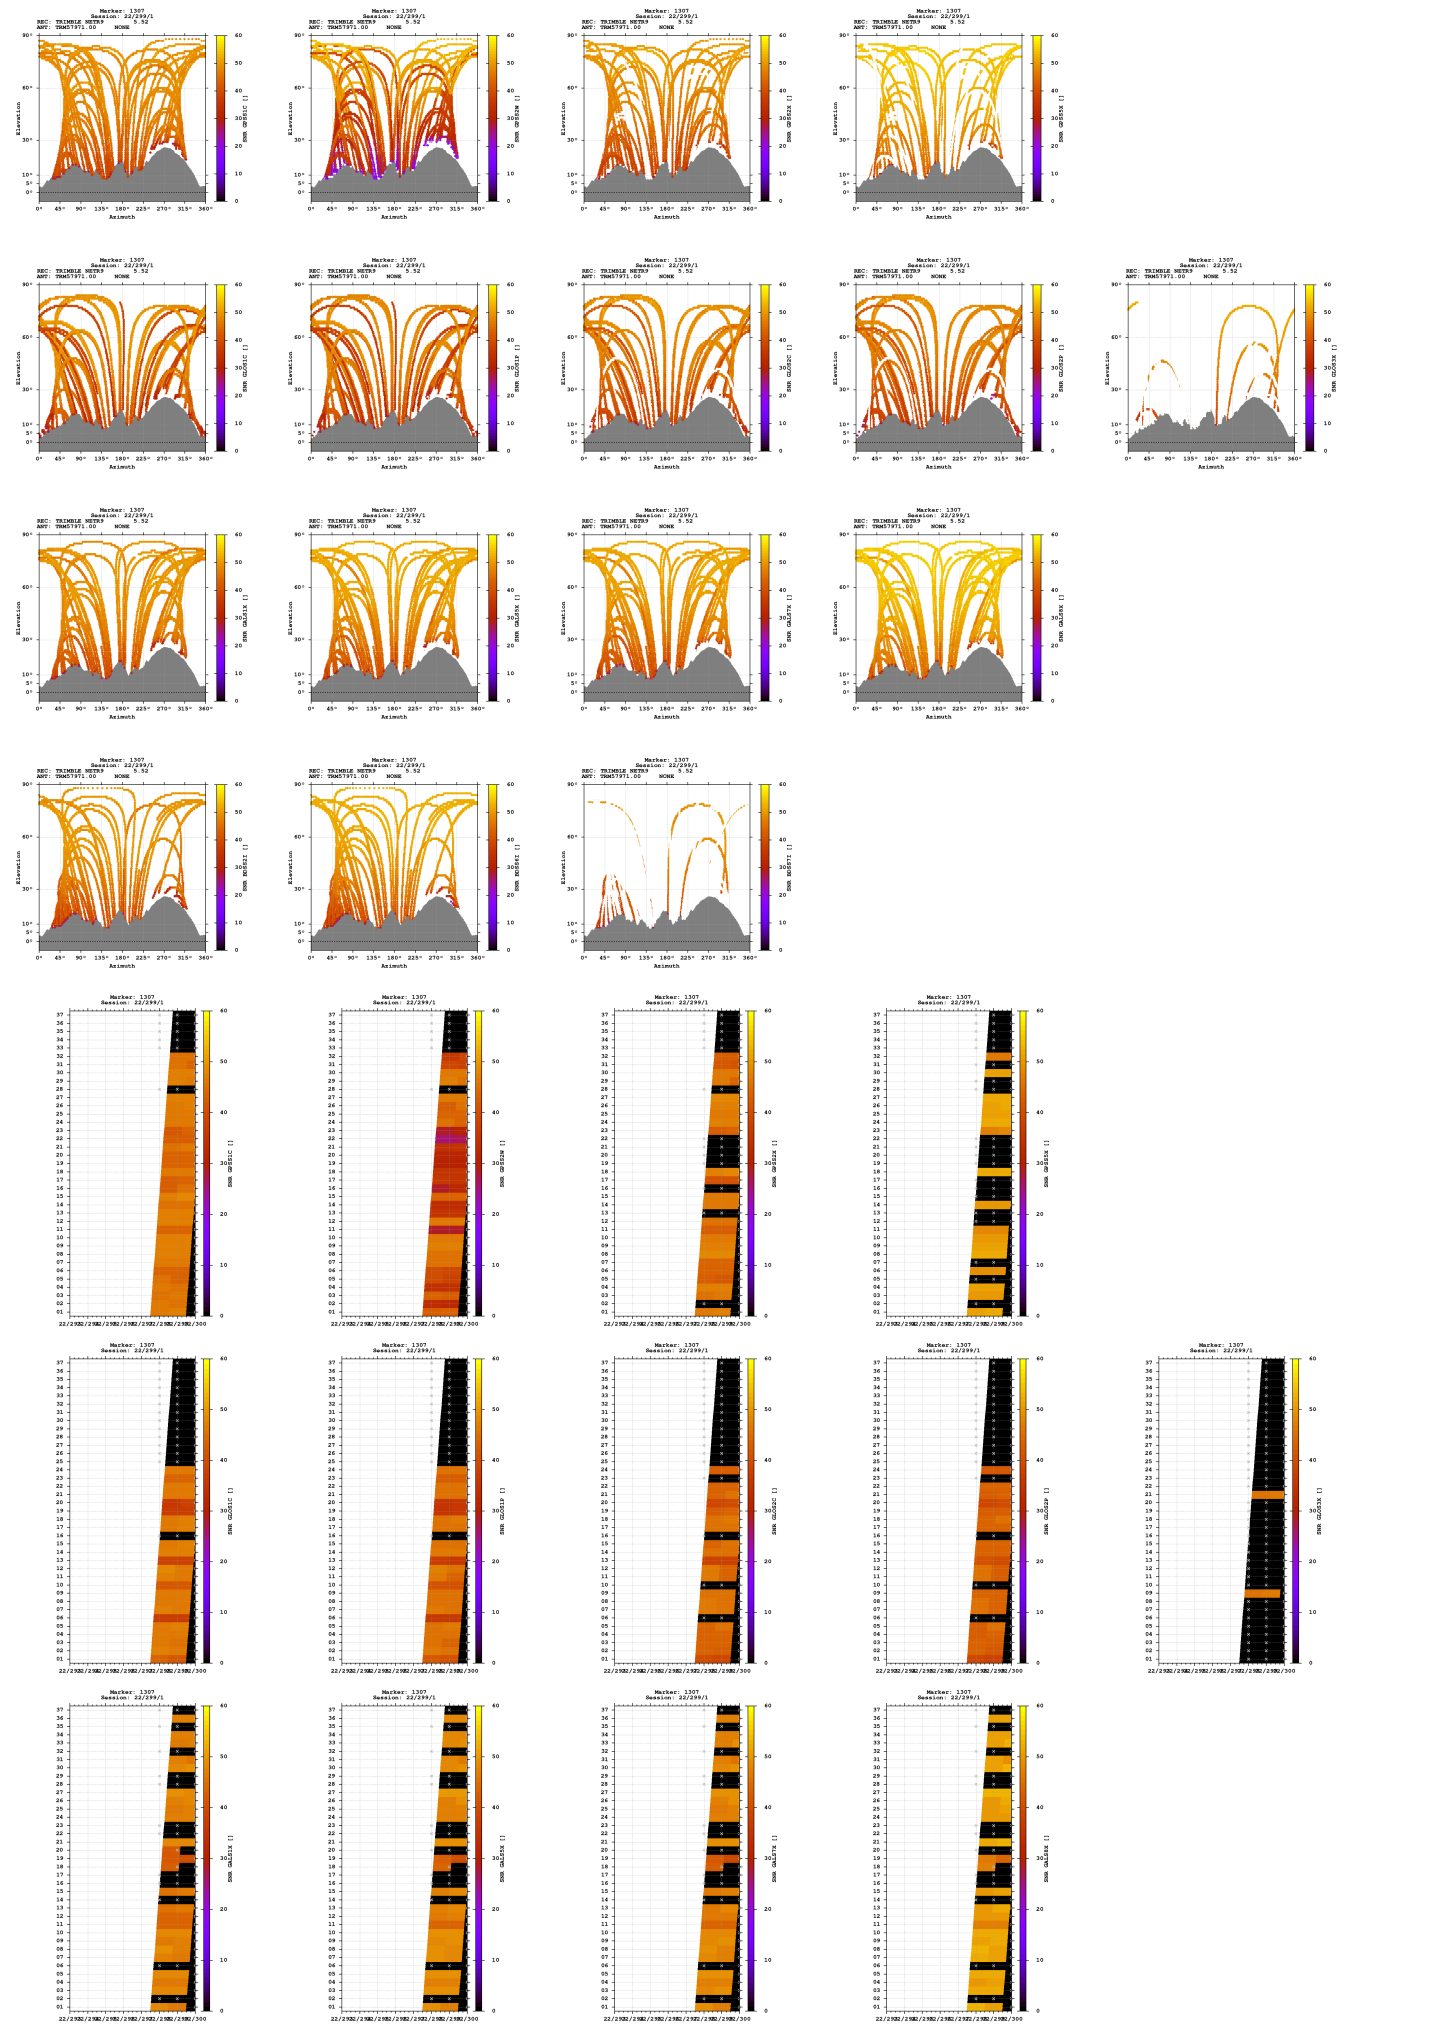

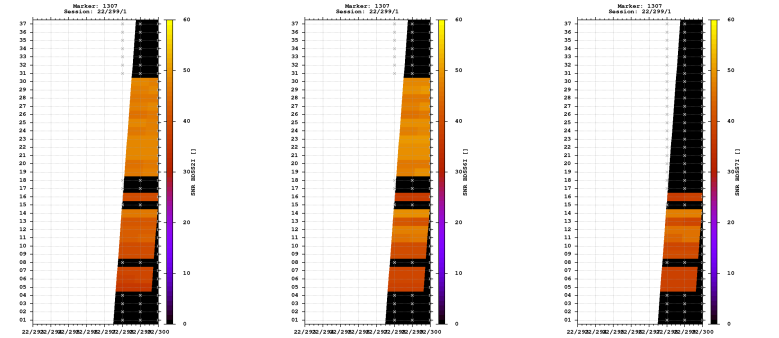



Estimates

2022-10-25 08:46:00	GPS	4385867.2199	583625.3435	4580809.9613	46.186466212	7.579792744	1647.7424
2022-10-25 08:46:00	GLO	4385869.4911	583626.0524	4580809.4157	46.186447596	7.579797964	1648.9722
2022-10-25 08:46:00	GAL	4385872.2368	583627.7870	4580815.8516	46.186468520	7.579815540	1655.6590
2022-10-25 08:46:00	BDS	4385865.6965	583626.5702	4580813.5739	46.186497457	7.579811092	1649.4159

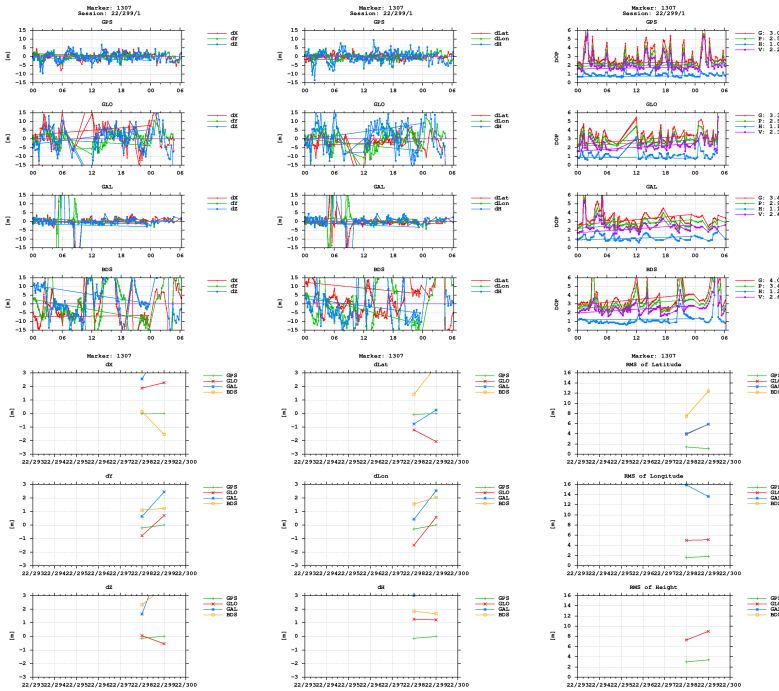

BNC

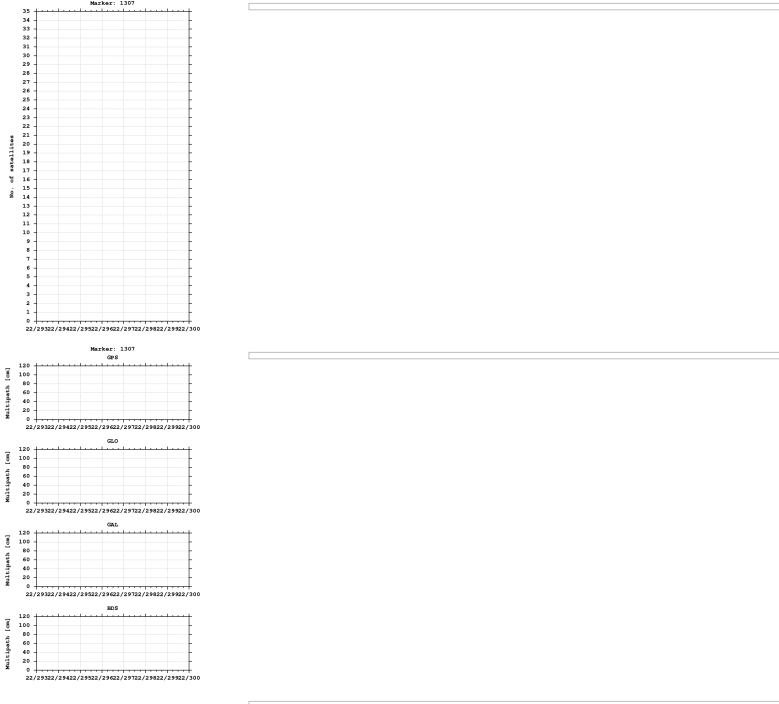

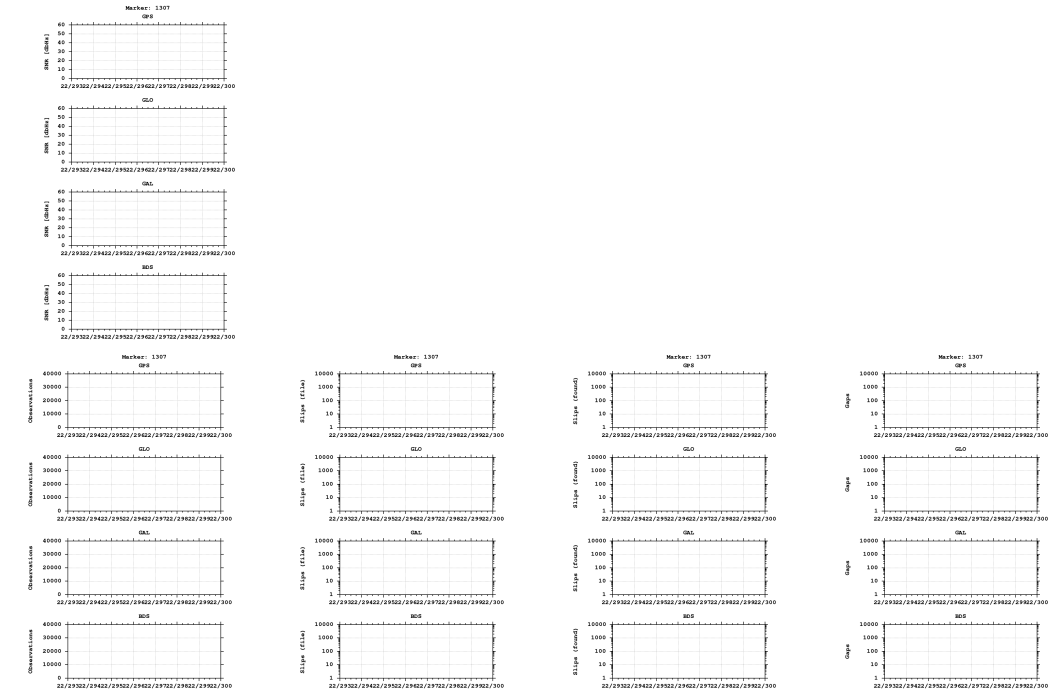

Equipment

2022-10-25 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)