

GNSS observation file monitoring for 0516

Last RINEX file: 05162981.220

RINEX version: 3.02

Marker: 1273

Receiver: 516

Antenna: 516


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

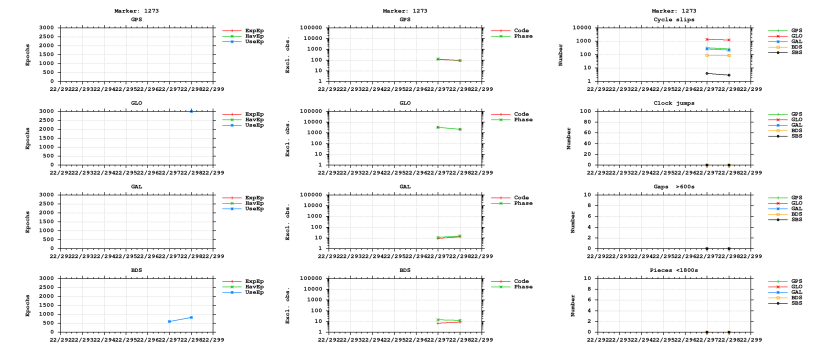



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

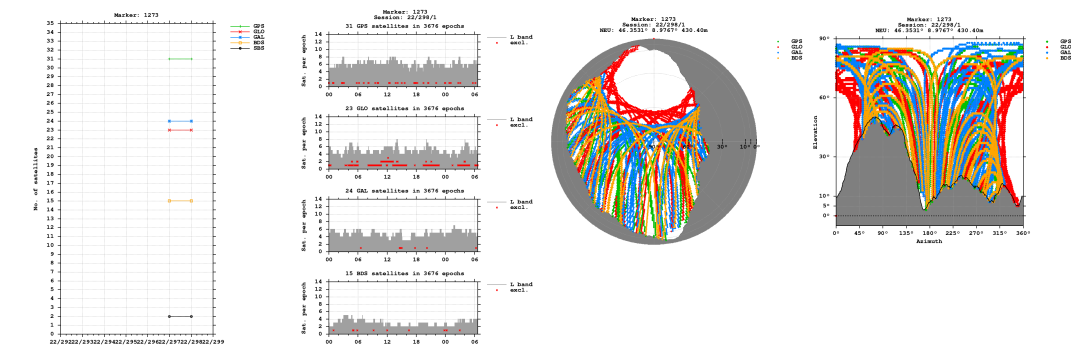


Bands

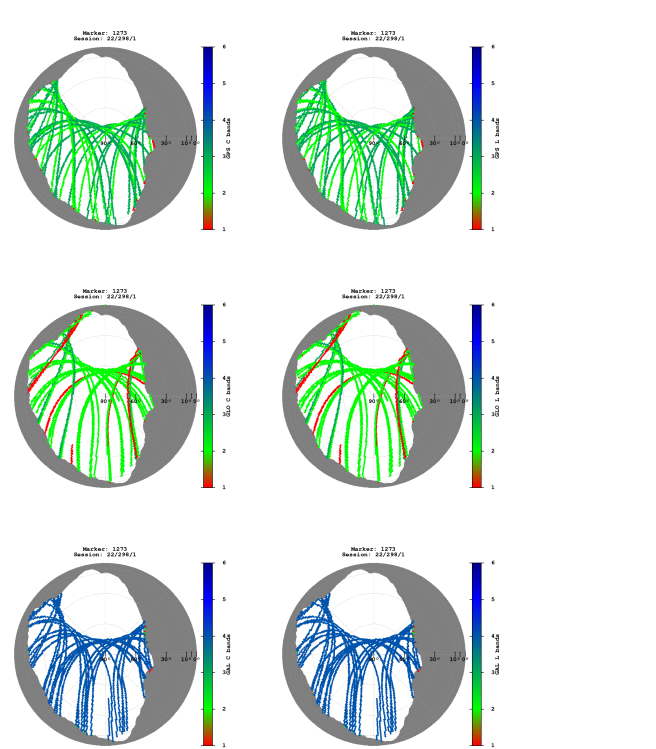


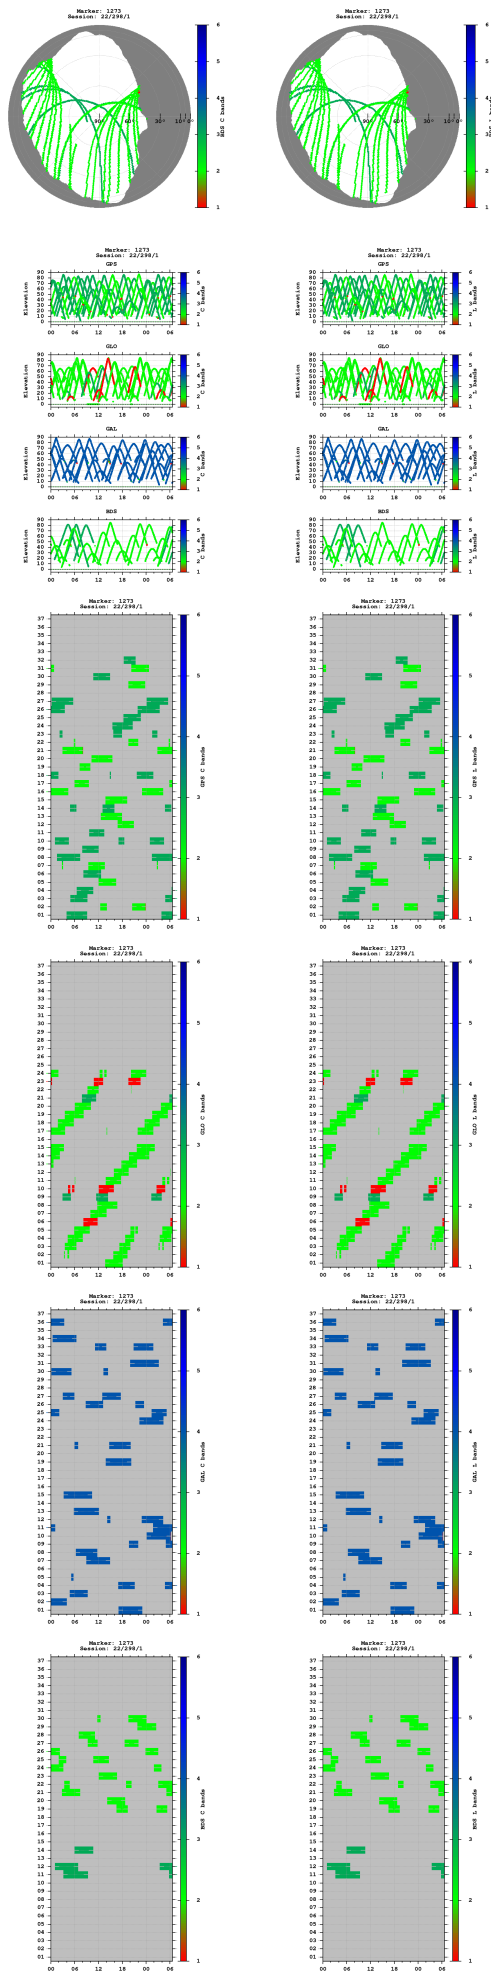


Observations

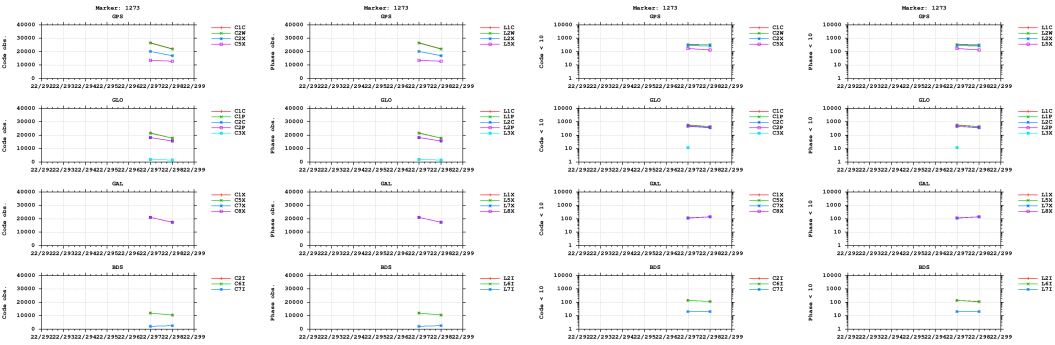


Multipath

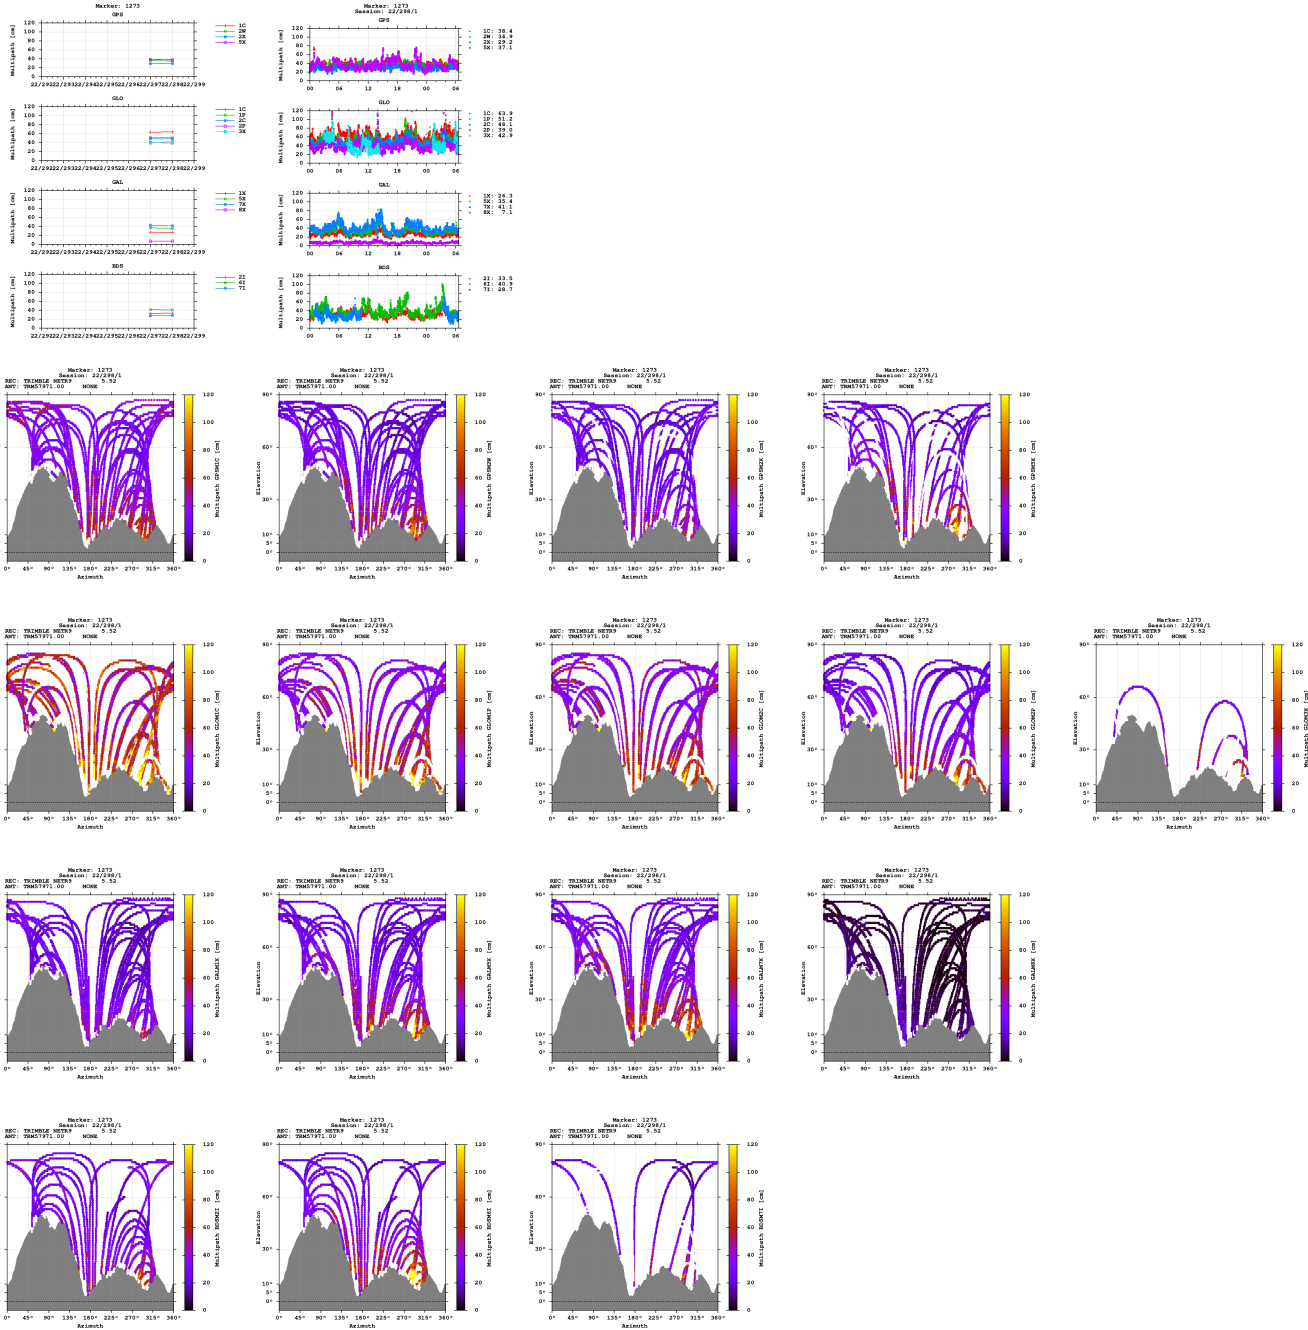


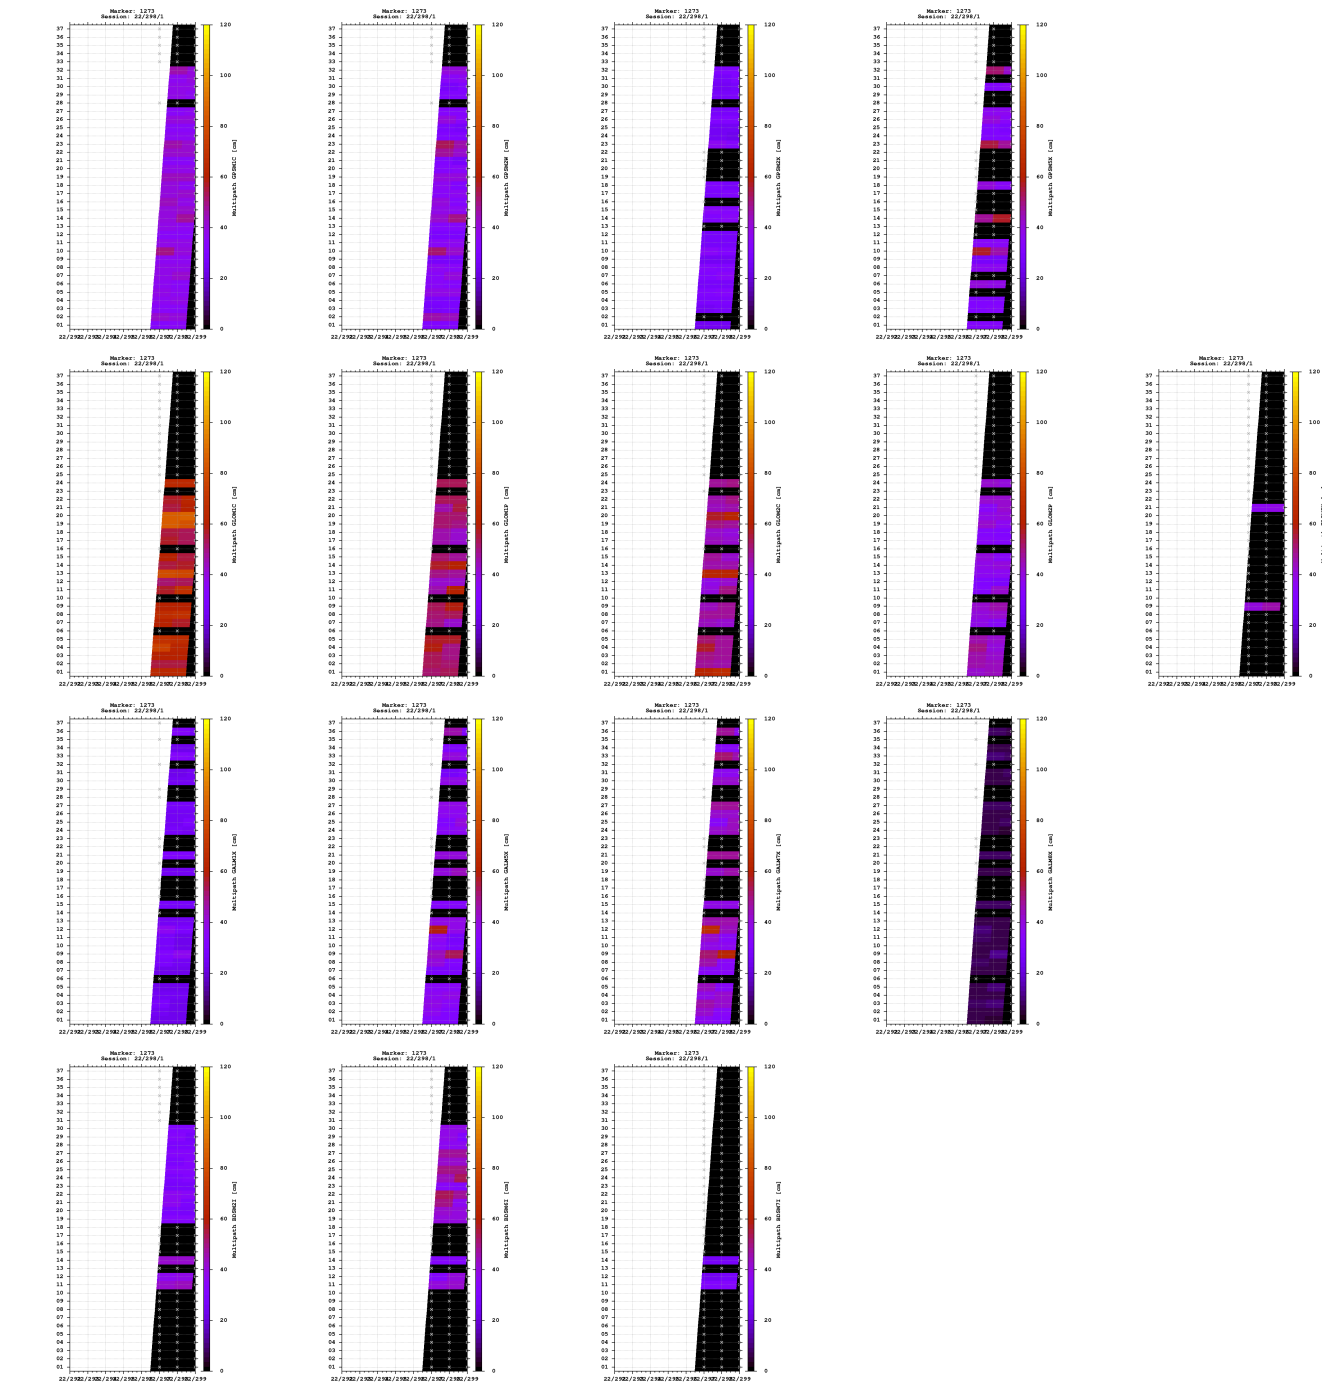


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

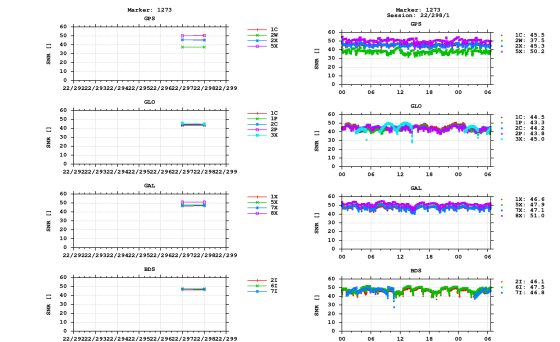


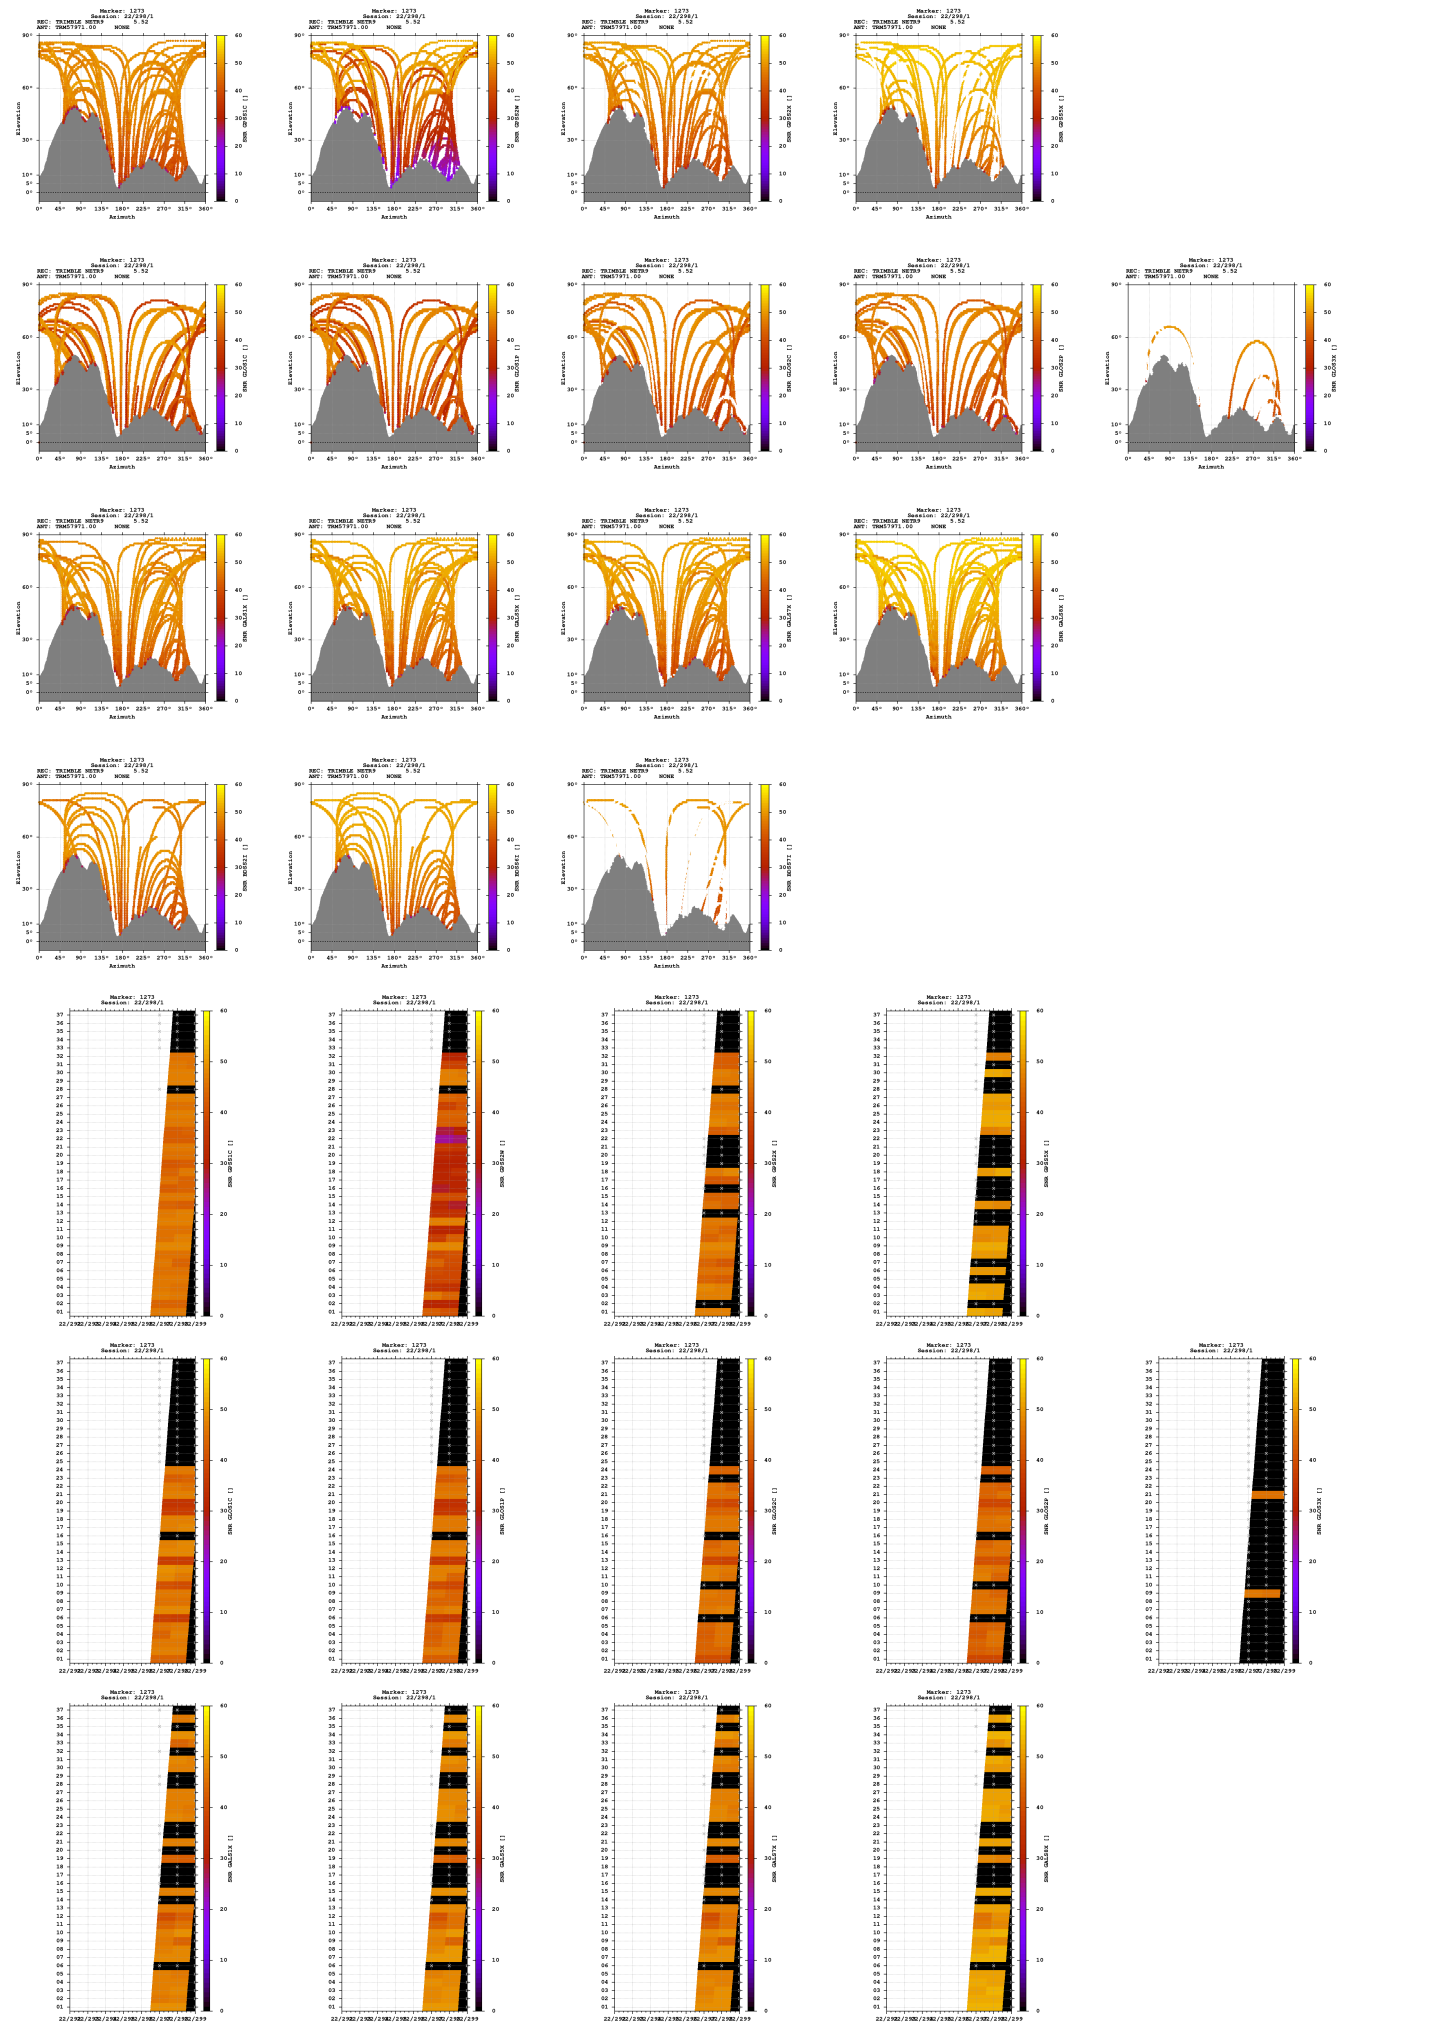

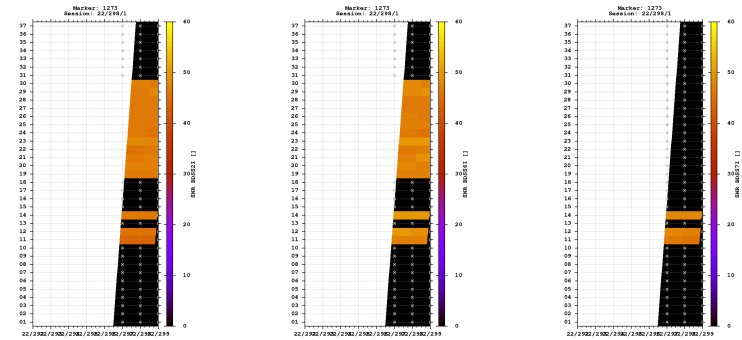



Estimates

2022-10-24 11:21:30	GPS	4356281.5757	688149.0576	4592737.2755	46.353112910	8.976670414	430.4033
2022-10-24 11:21:30	GLO	4356283.1970	688148.0972	4592738.2201	46.353109326	8.976654804	432.0888
2022-10-24 11:21:30	GAL	4356295.1351	688146.2749	4592743.9686	46.353070114	8.976607223	444.1911
2022-10-24 11:21:30	BDS	4356294.9662	688143.1616	4592749.7803	46.353110444	8.976567612	447.9460

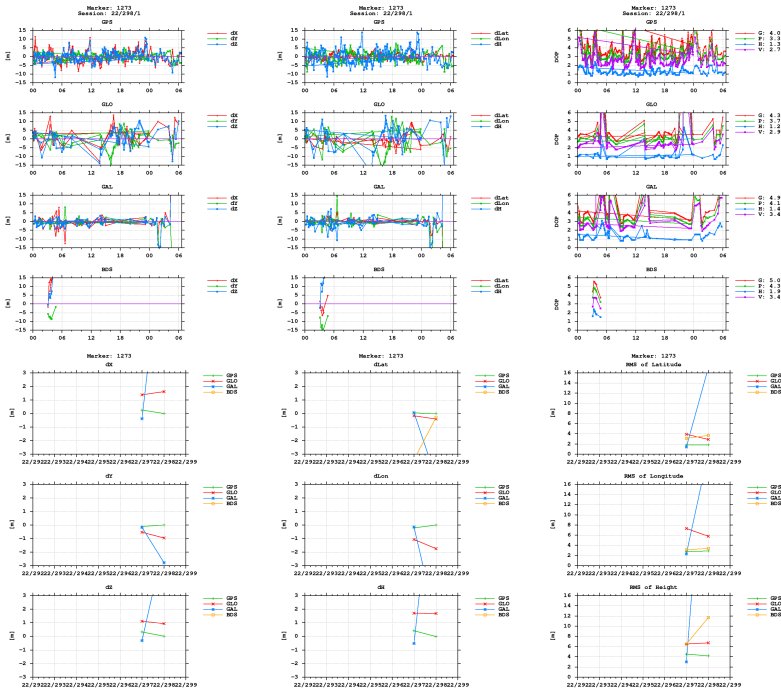

BNC

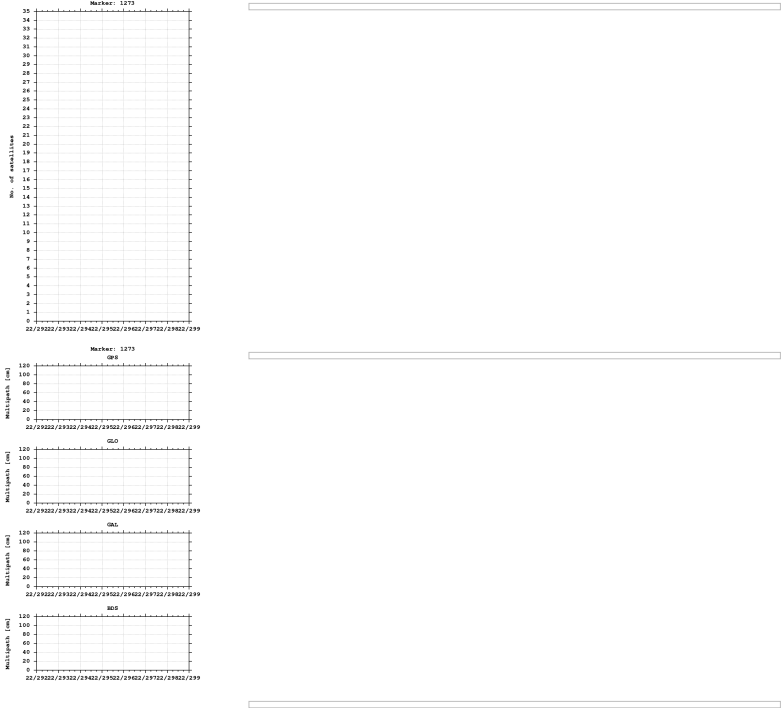

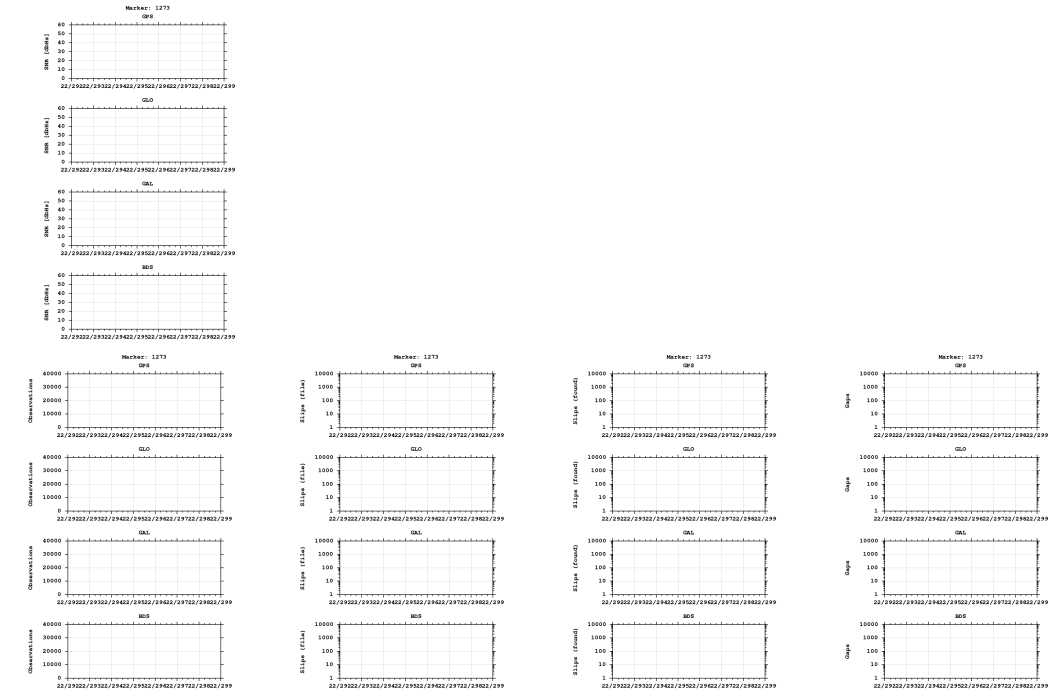

Equipment

2022-10-24 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)