


GNSS observation file monitoring for 0517


Last RINEX file: 05172971.22O
RINEX version: 3.02
Marker: 1232
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 519 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

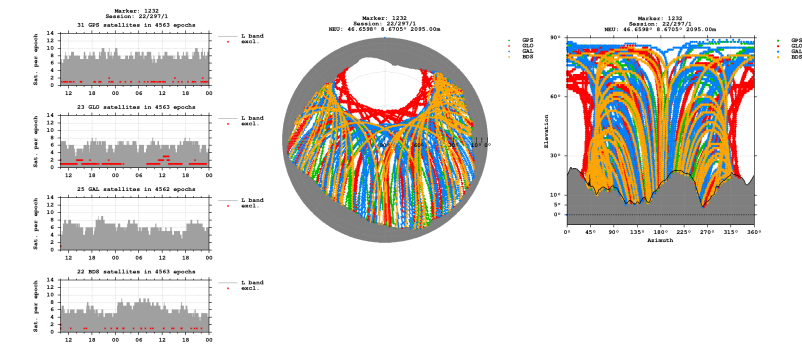


Bands

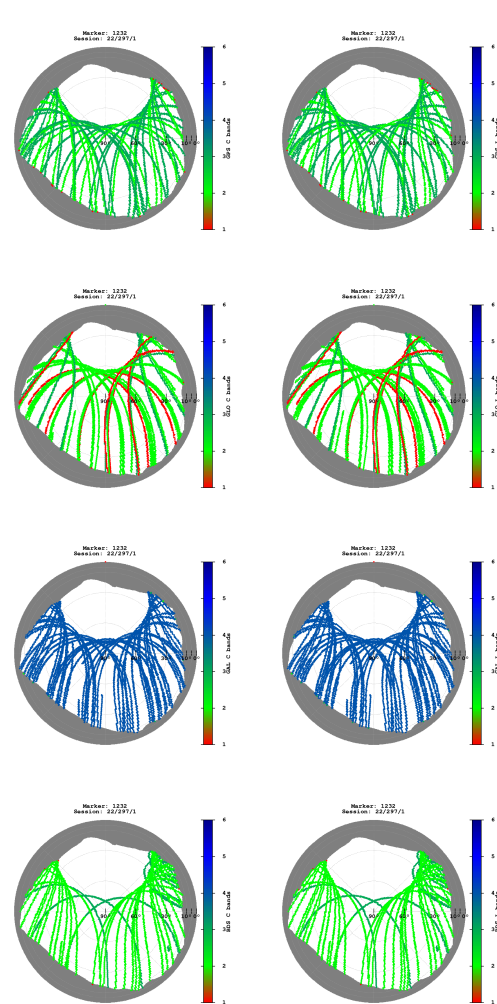

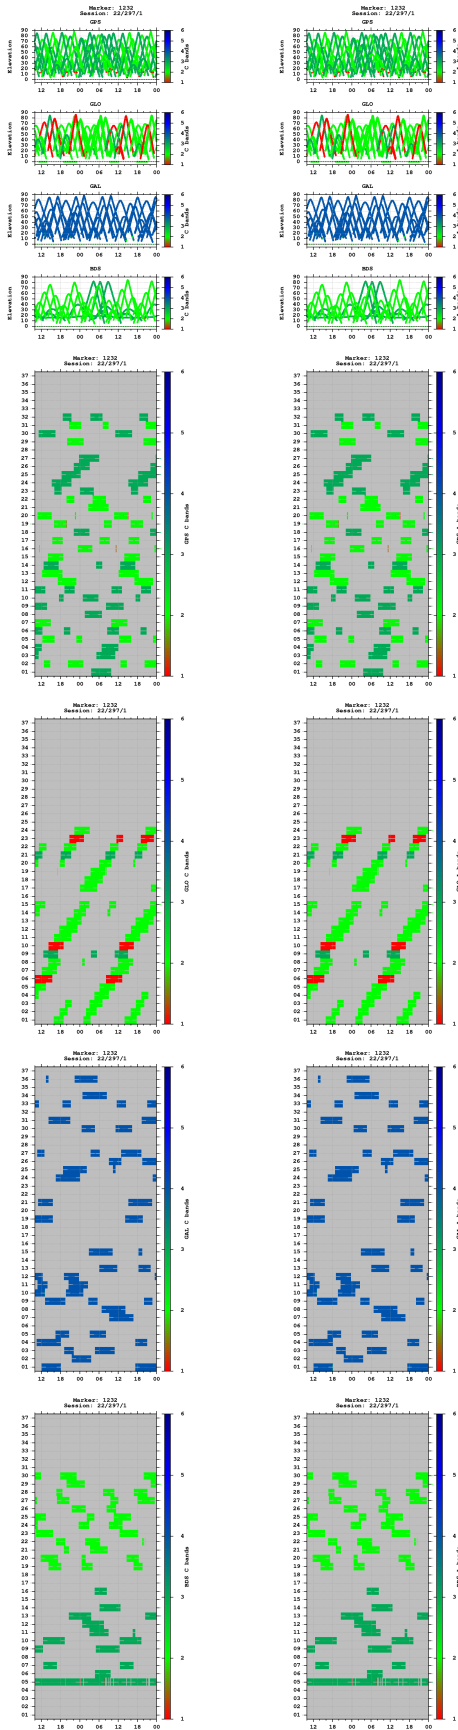



Multipath

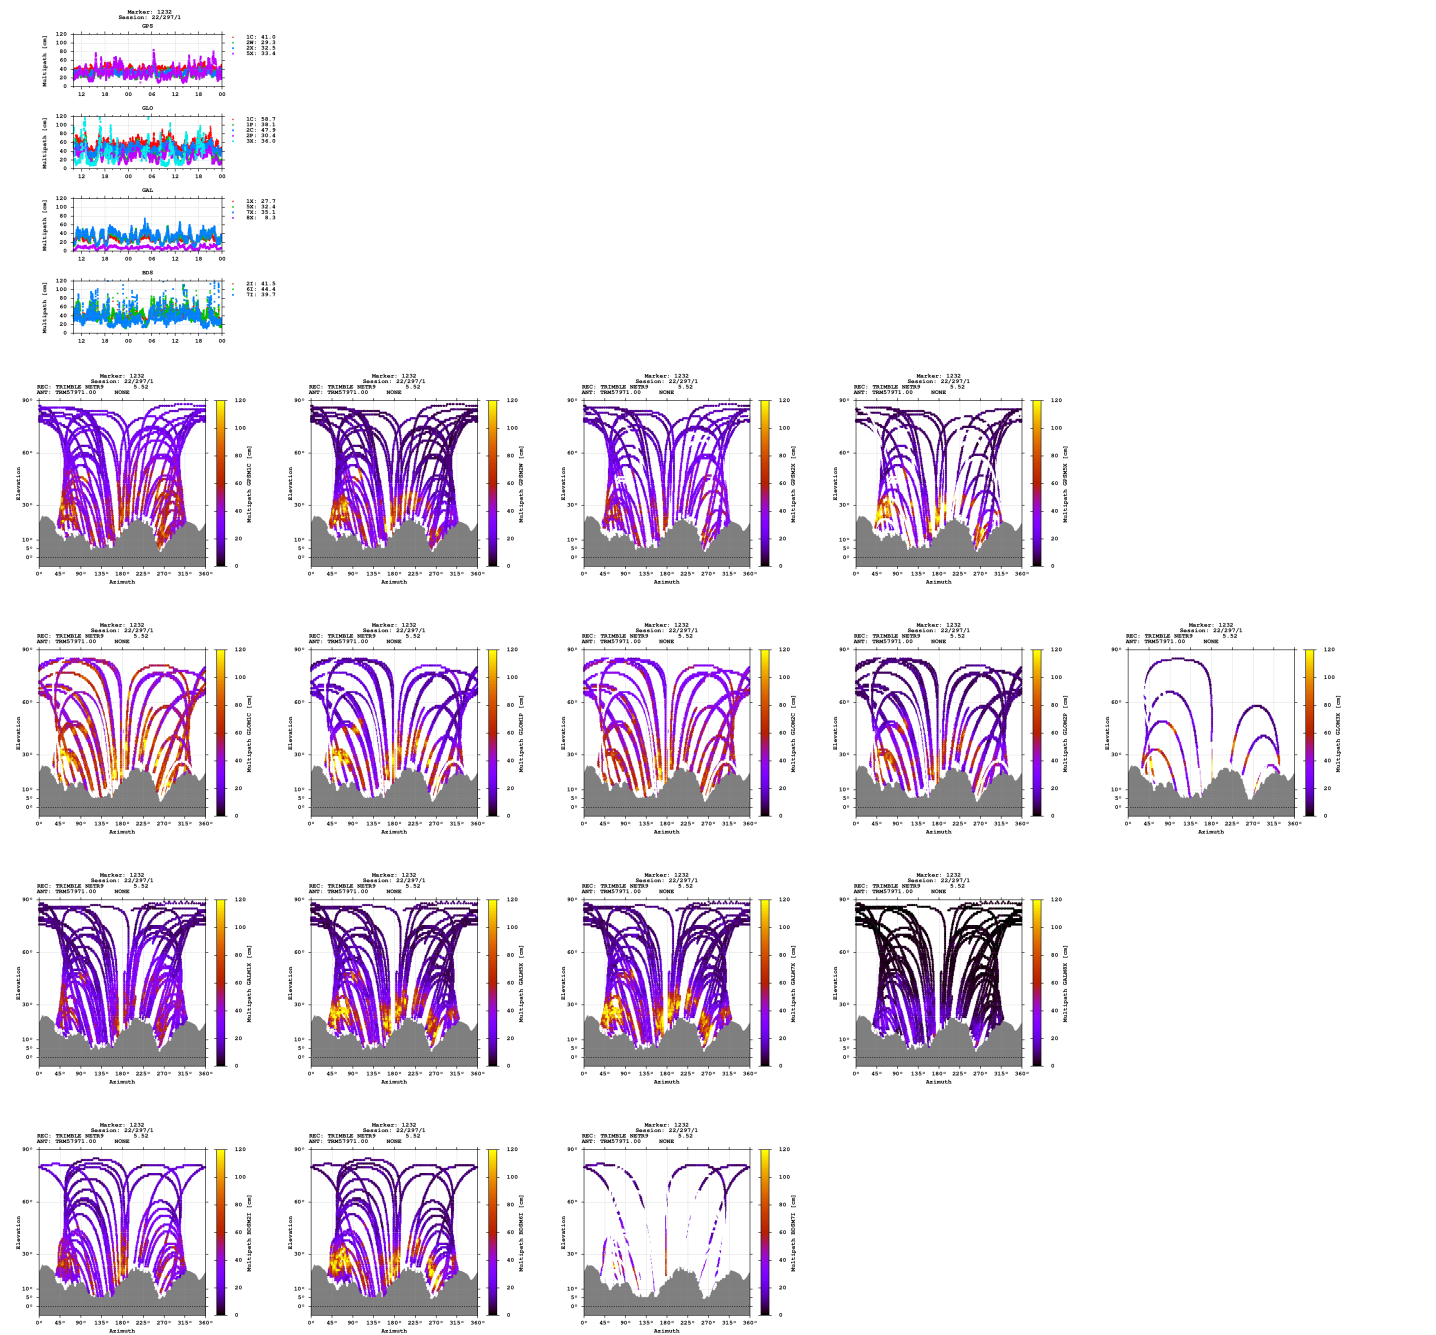

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

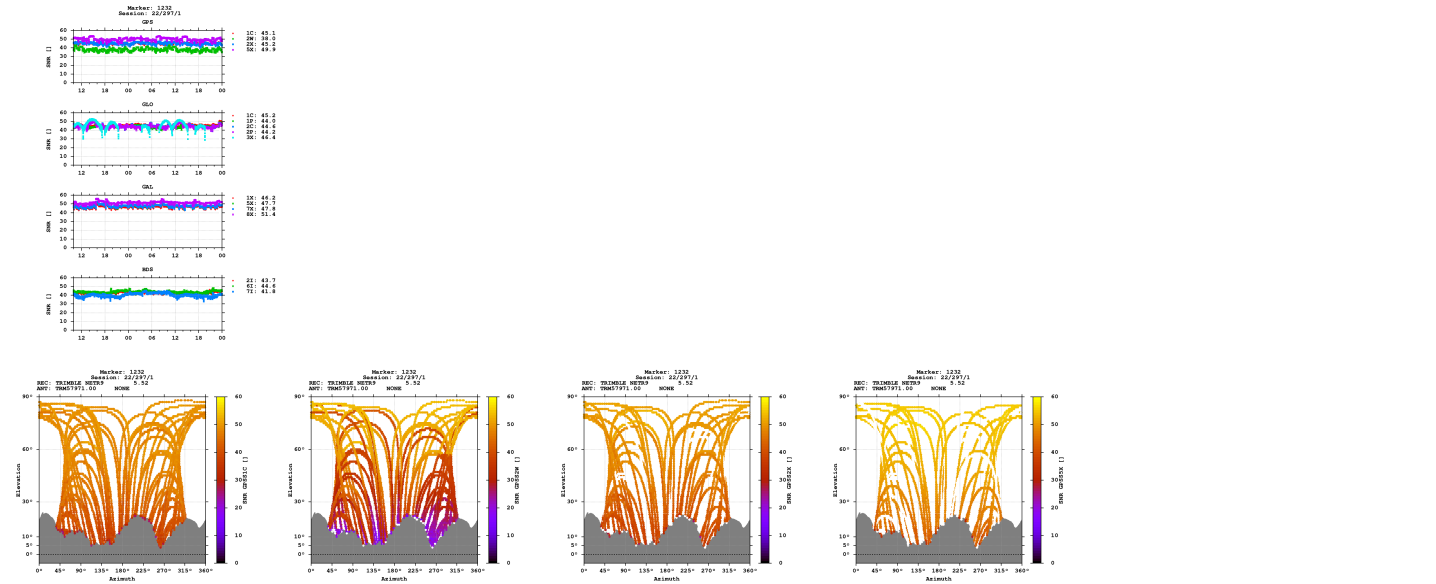

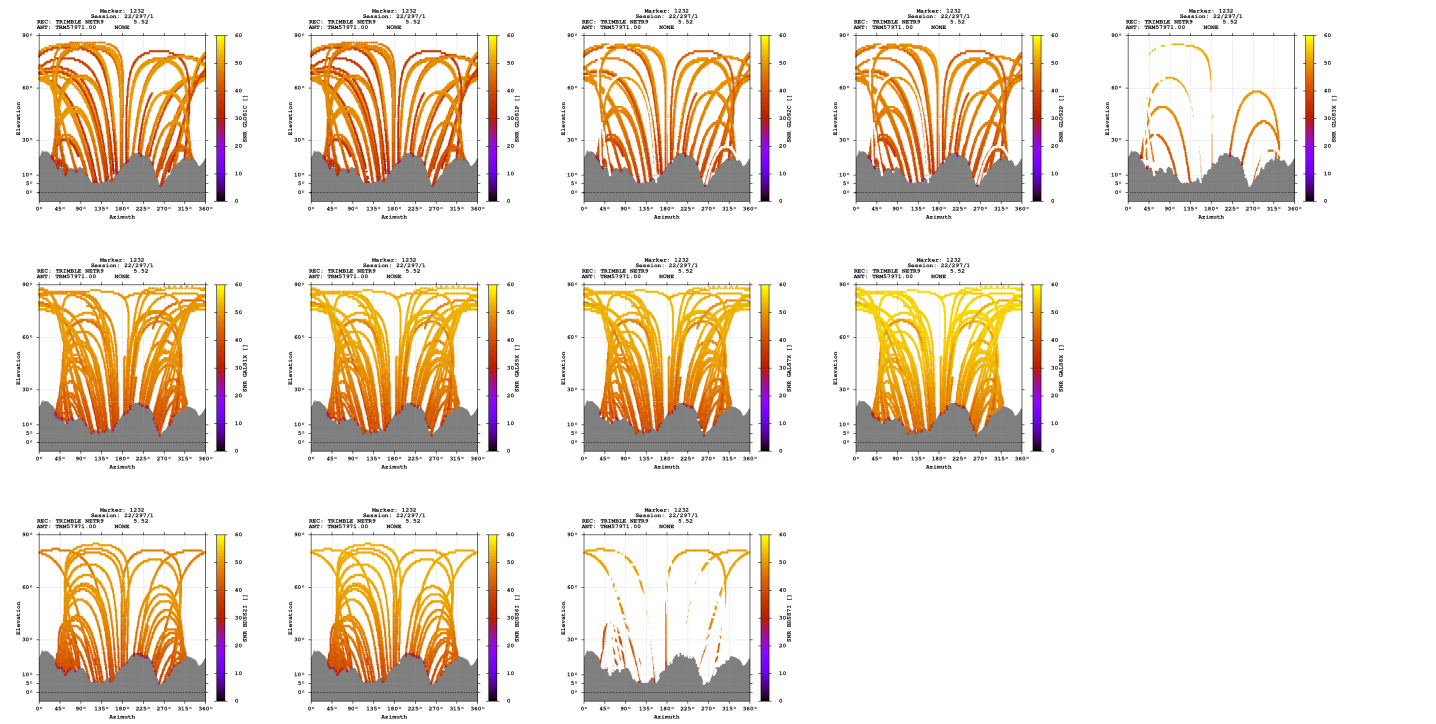

Estimates

2022-10-24 09:58:30	GPS	4336578.2883	661303.7154	4617411.0317	46.659762739	8.670485453	2094.9996
2022-10-24 09:58:30	GLO	4336579.1299	661303.1600	4617410.9474	46.659757325	8.670476624	2095.4519
2022-10-24 09:58:30	GAL	4336577.8191	661303.6624	4617410.4288	46.659762104	8.670485691	2094.2373
2022-10-24 09:58:30	BDS	4336579.6708	661304.5464	4617415.3585	46.659779686	8.670493460	2099.1705

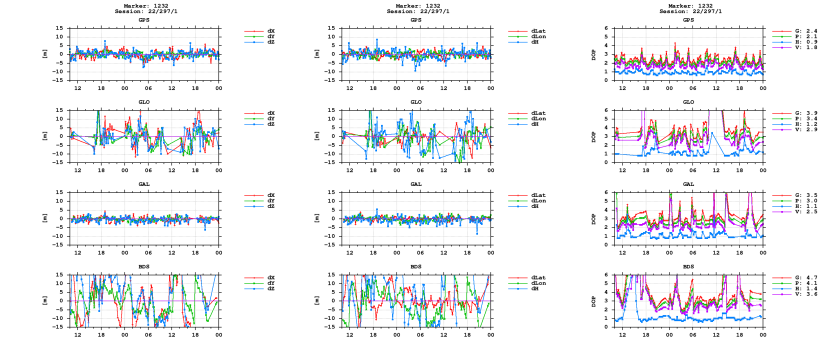

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)