

GNSS observation file monitoring for 0518

Last RINEX file: 05182971.22O

RINEX version: 3.02

Marker: 1274


Receiver: 518 TRIMBLE NETR9 5.52

Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

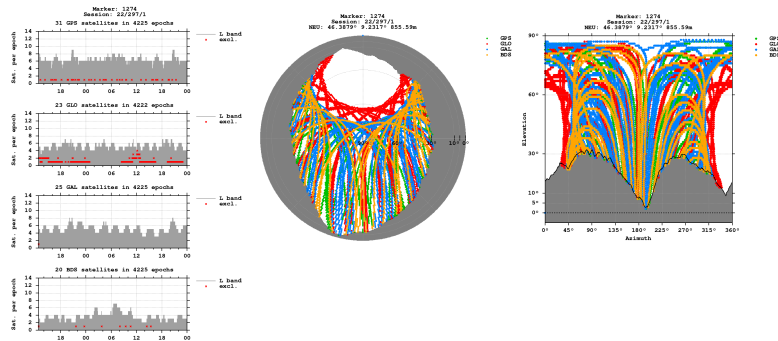


Bands

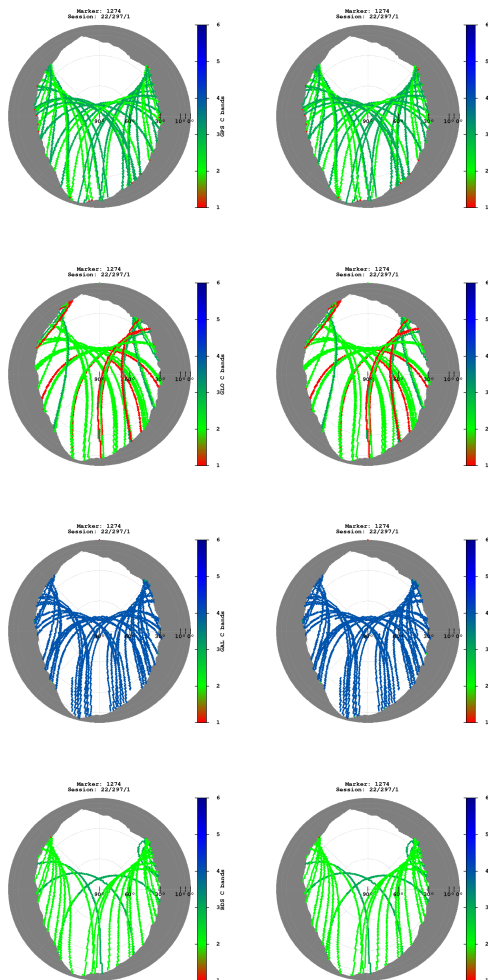

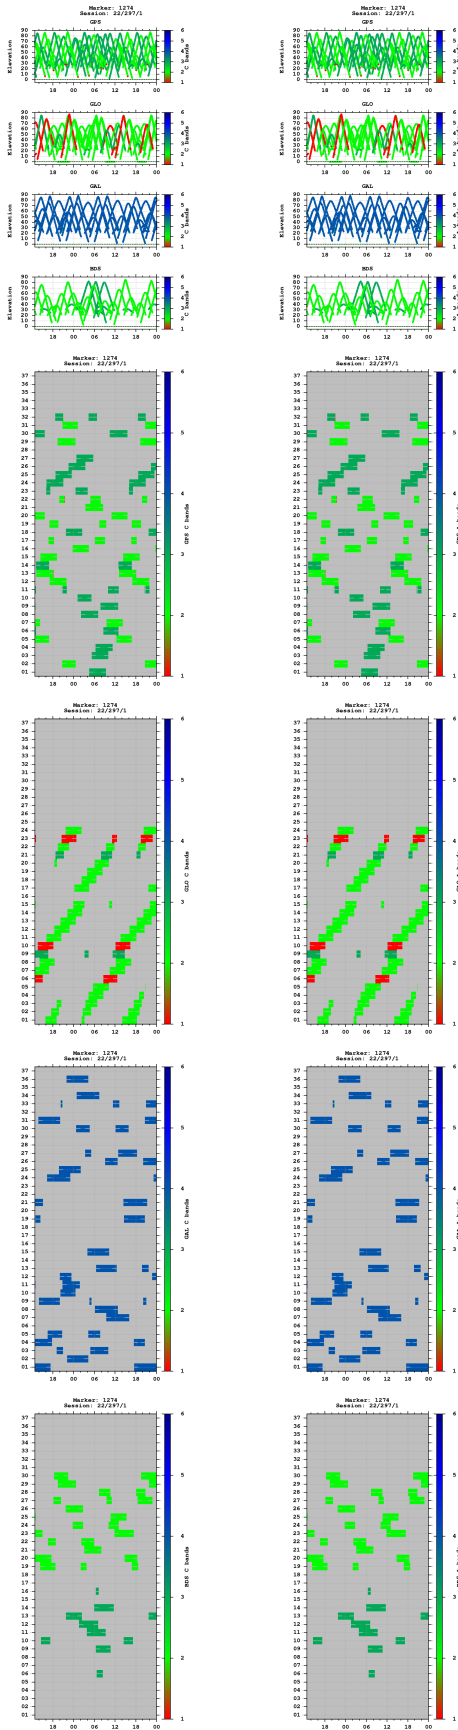



Multipath

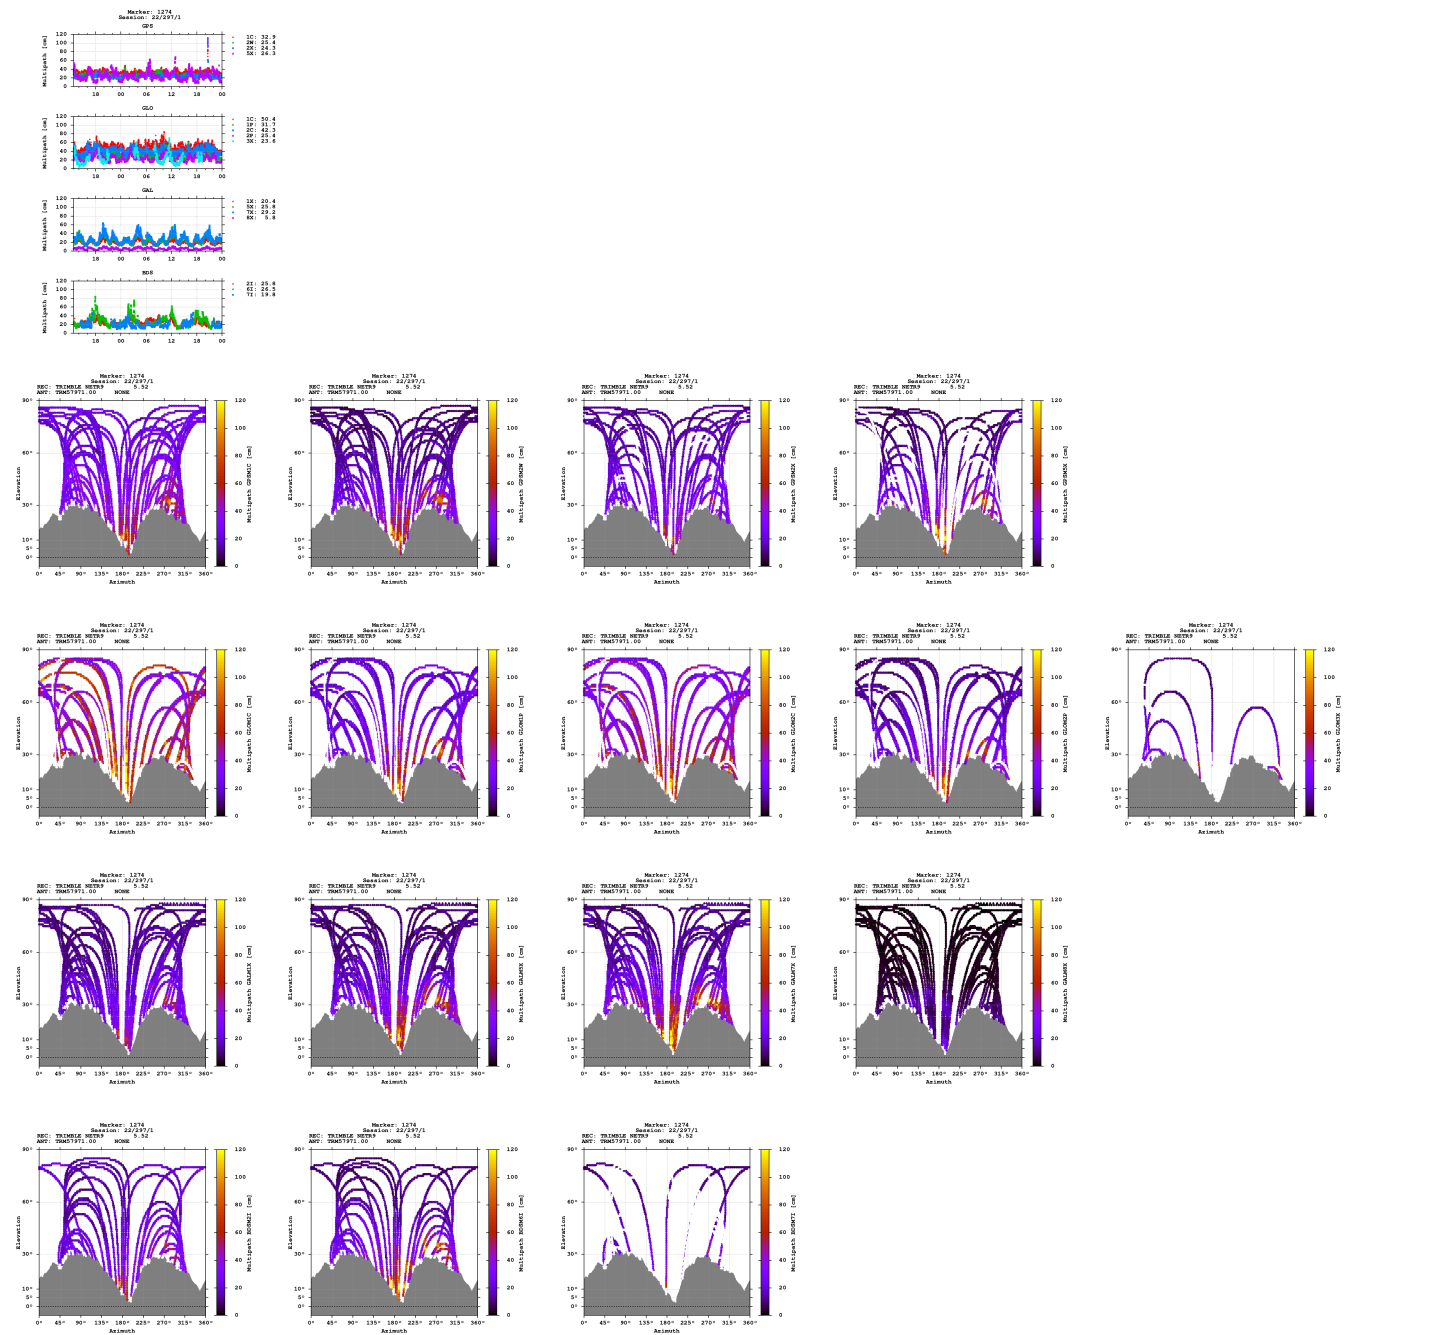

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

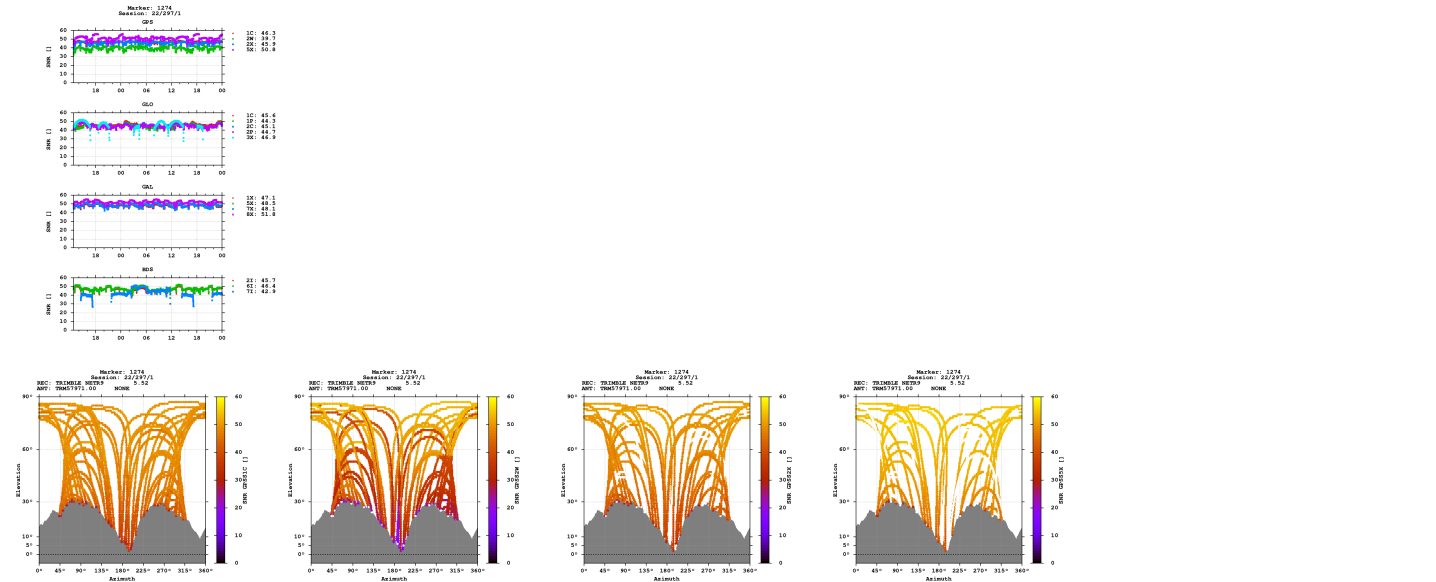

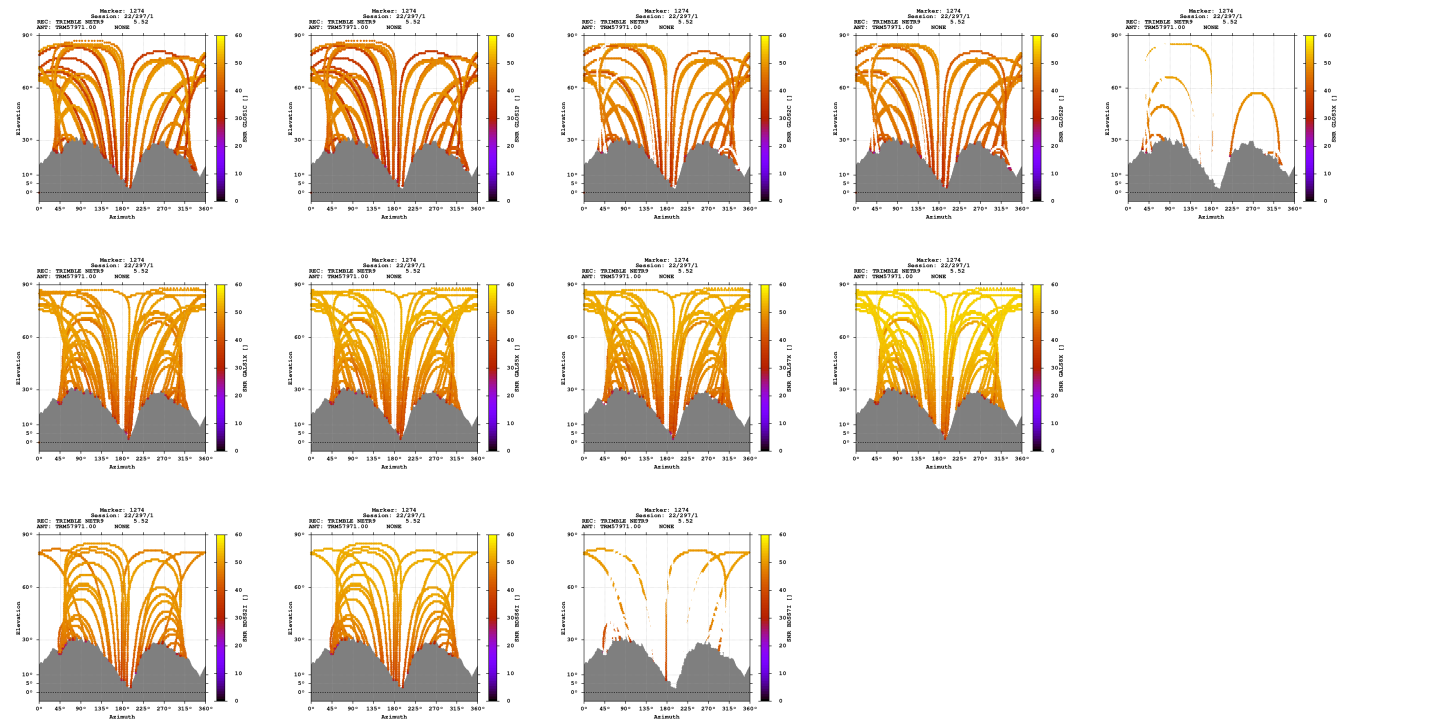

Estimates

2022-10-24 12:47:30	GPS	4350701.2409	707130.3436	4595714.1844	46.387909993	9.231700367	855.5859
2022-10-24 12:47:30	GLO	4350702.2135	707130.2039	4595713.4556	46.387899365	9.231696545	855.7050
2022-10-24 12:47:30	GAL	4350701.1925	707130.4158	4595713.6643	46.387907002	9.231701393	855.1844
2022-10-24 12:47:30	BDS	4350691.6459	707124.3622	4595700.8382	46.387895116	9.231643631	838.7284

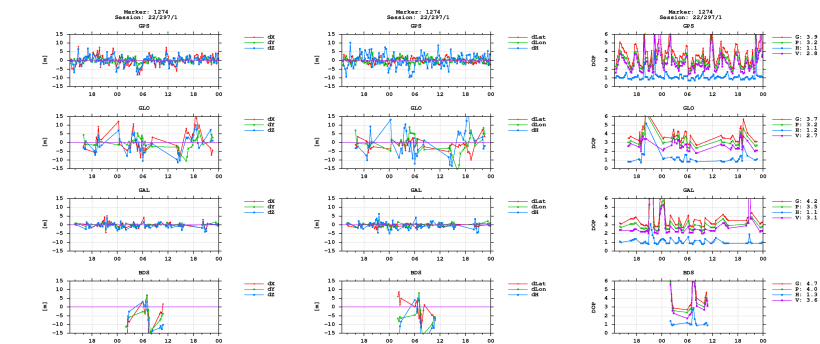

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)