

GNSS observation file monitoring for BORM

Last RINEX file: BORM1970.25D.Z


RINEX version: 3.05

Marker: BORM 19502M001

Receiver: SC22E106 STONEX SC2200 2.12.240201-STX

Antenna: S21060010 STXSA1200 STXR


Epochs

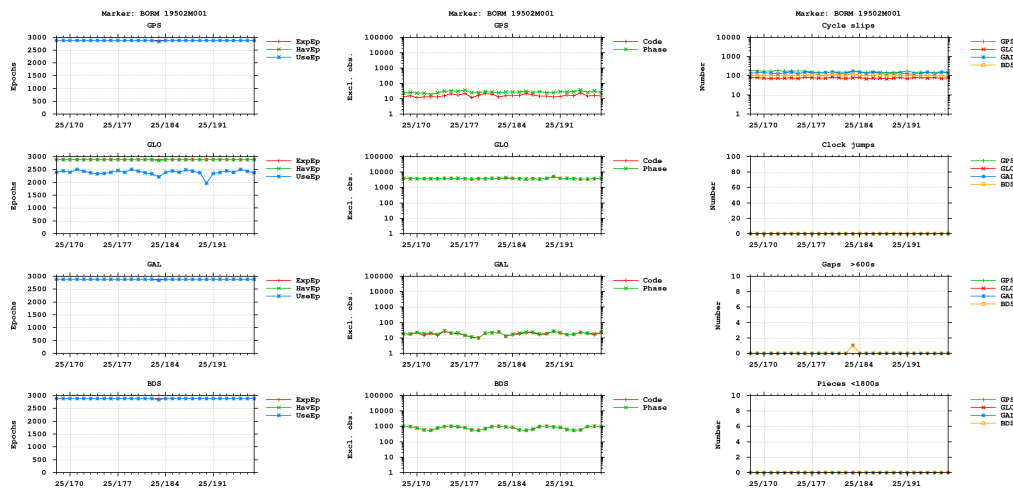


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

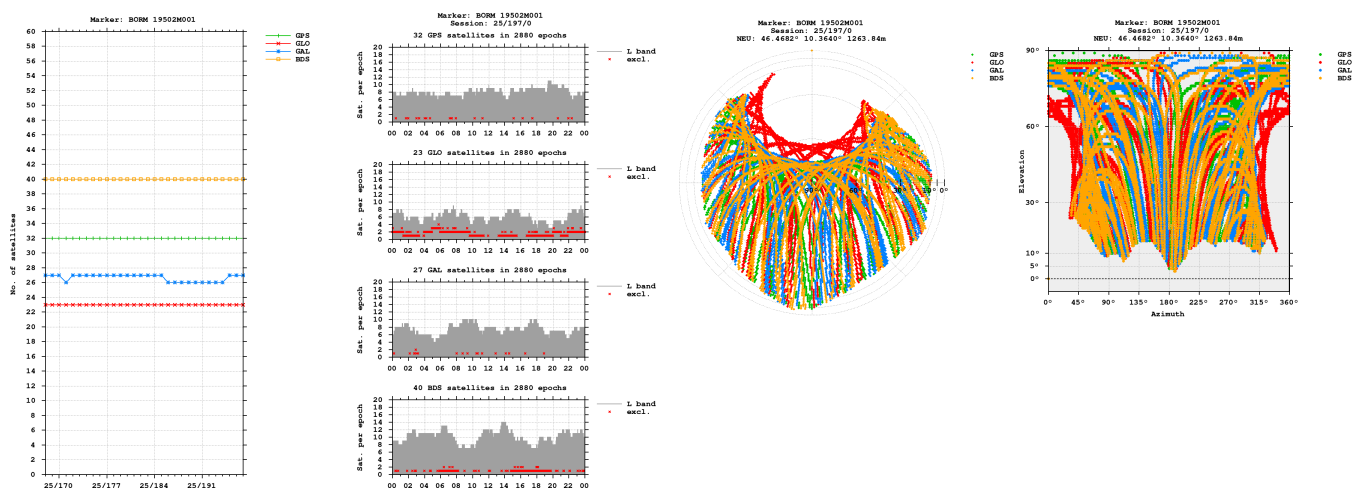


Bands

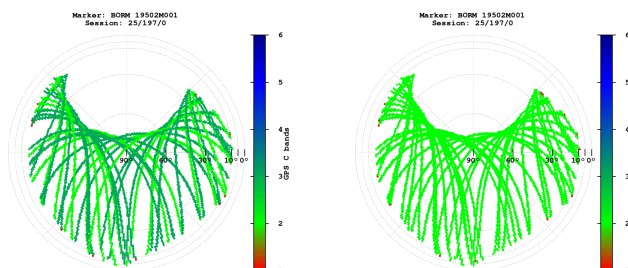


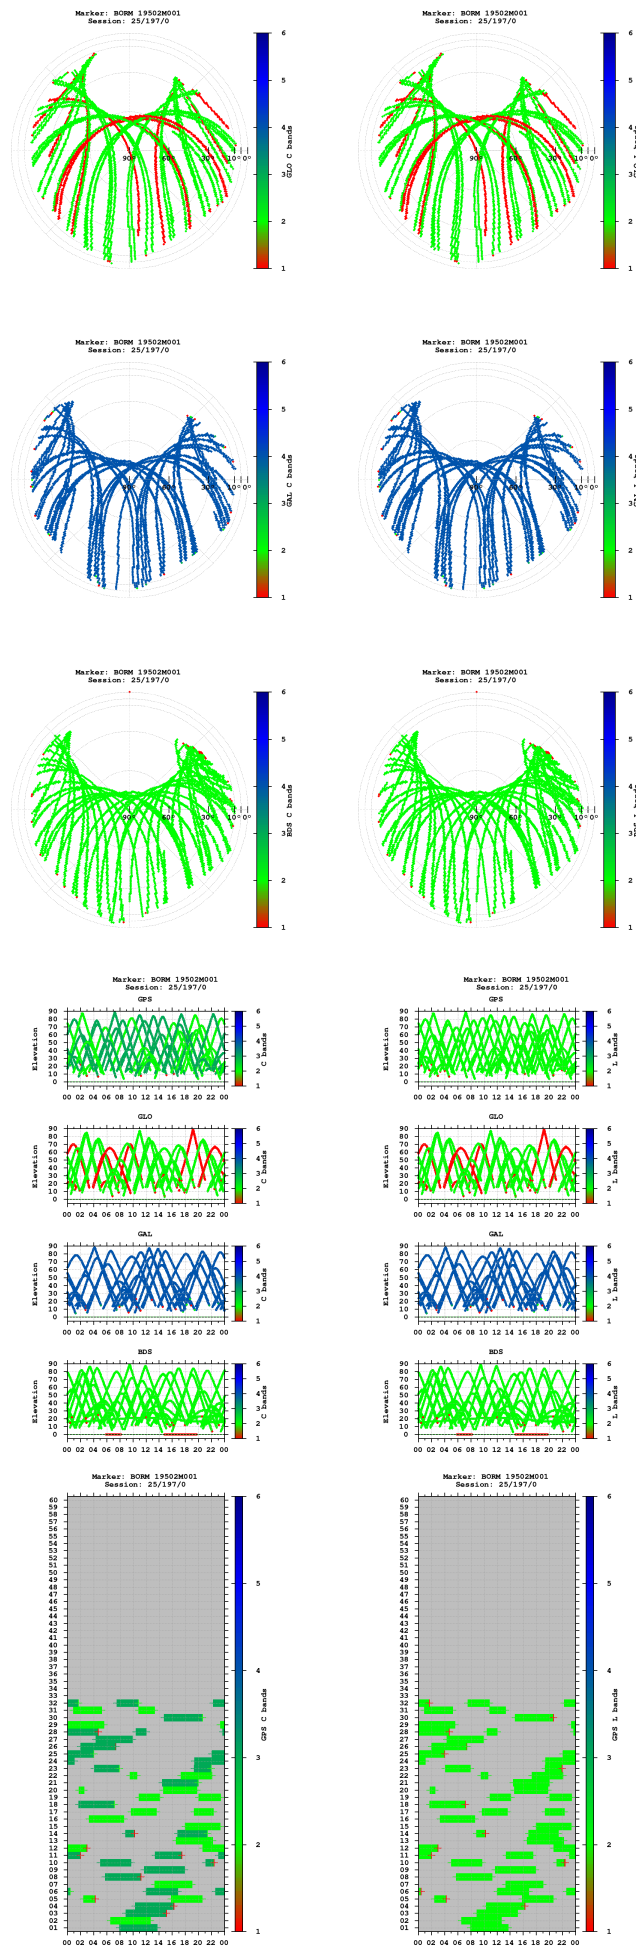

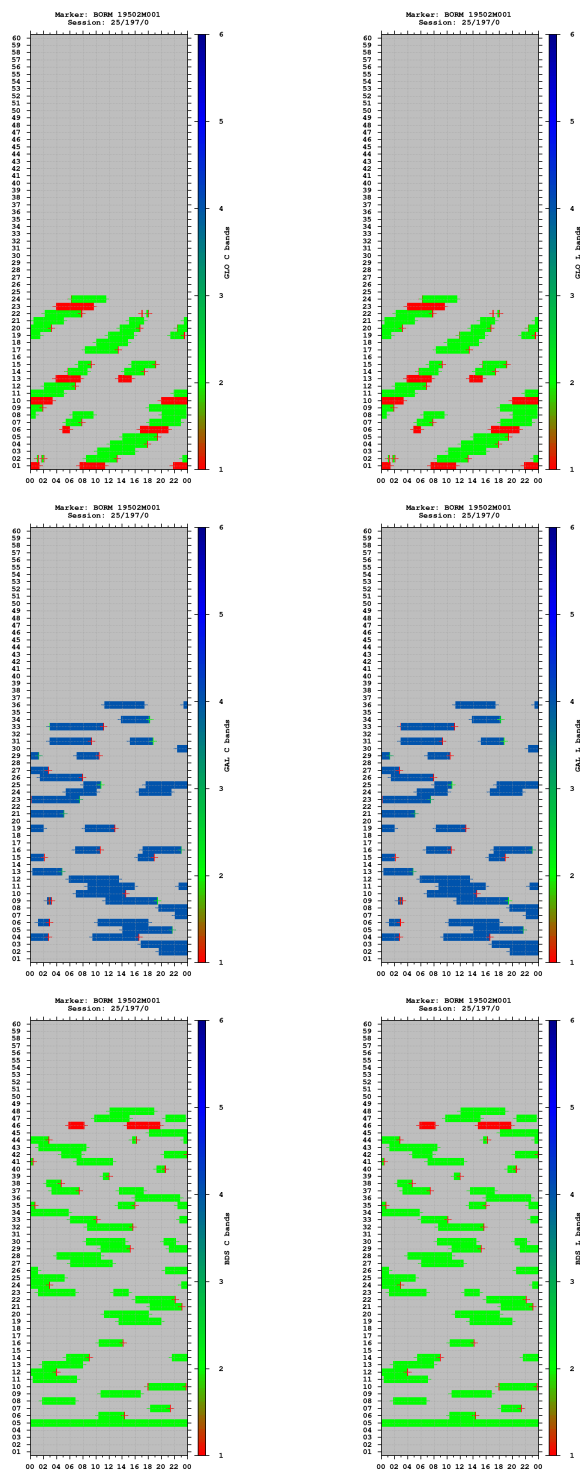



Observations

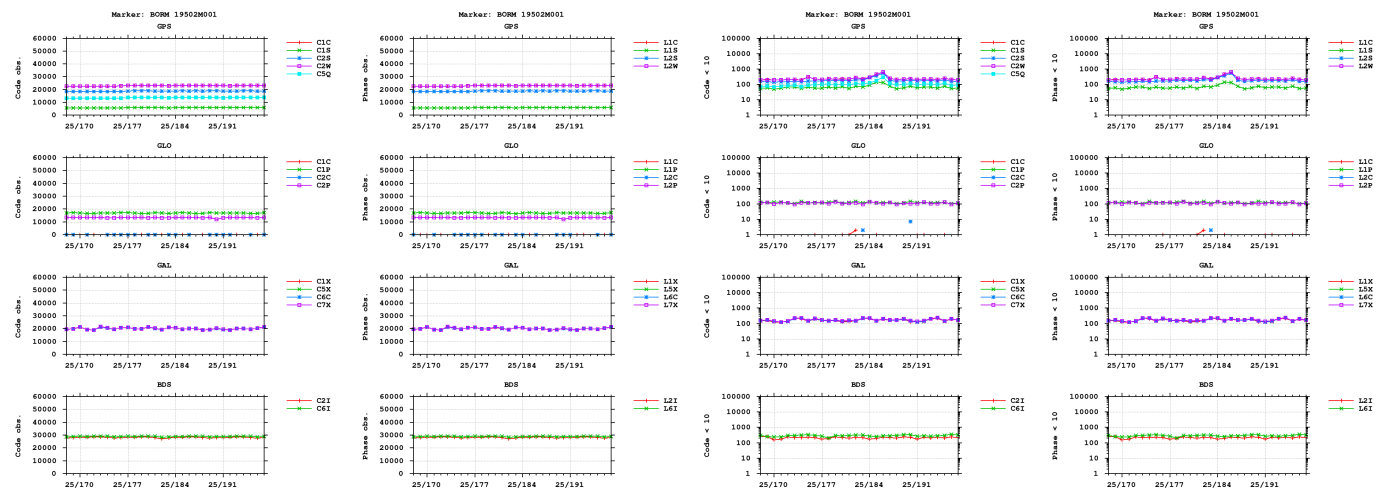


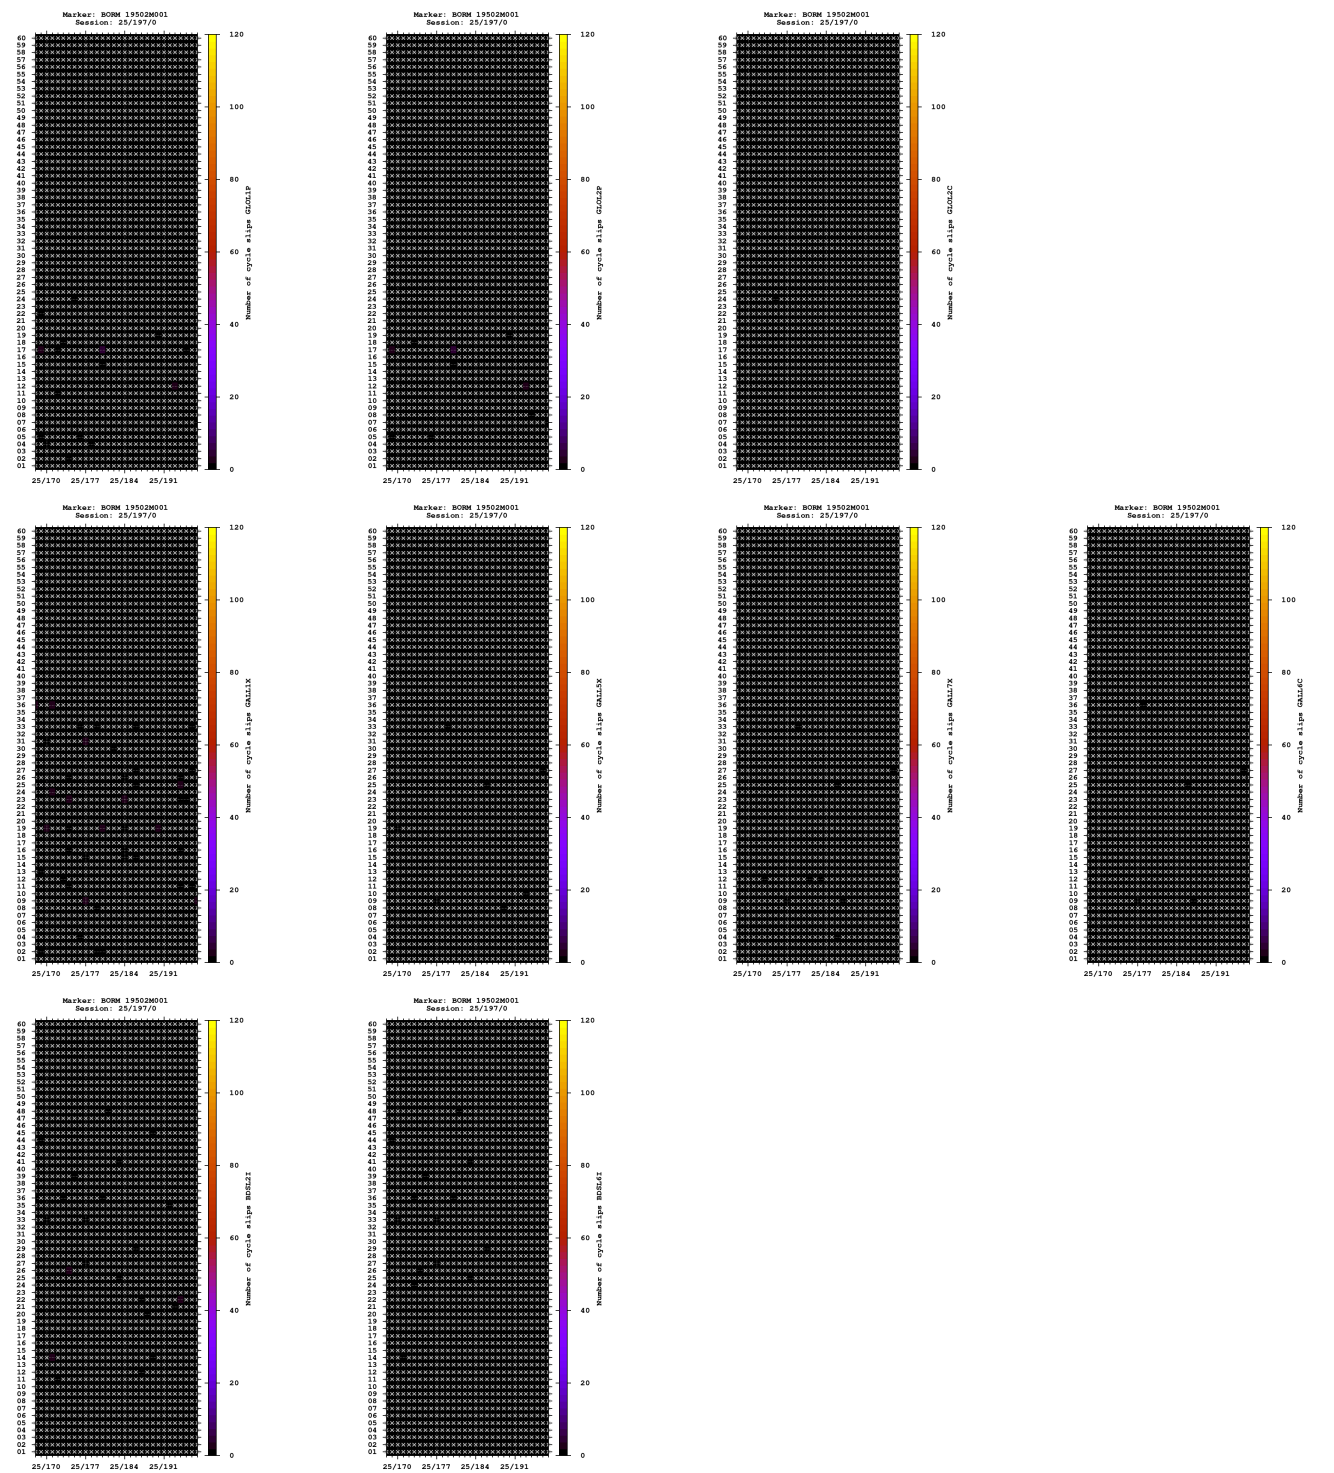


Multipath

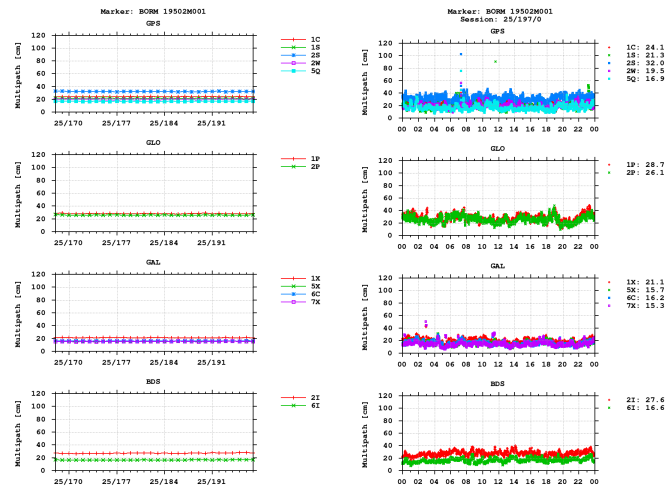


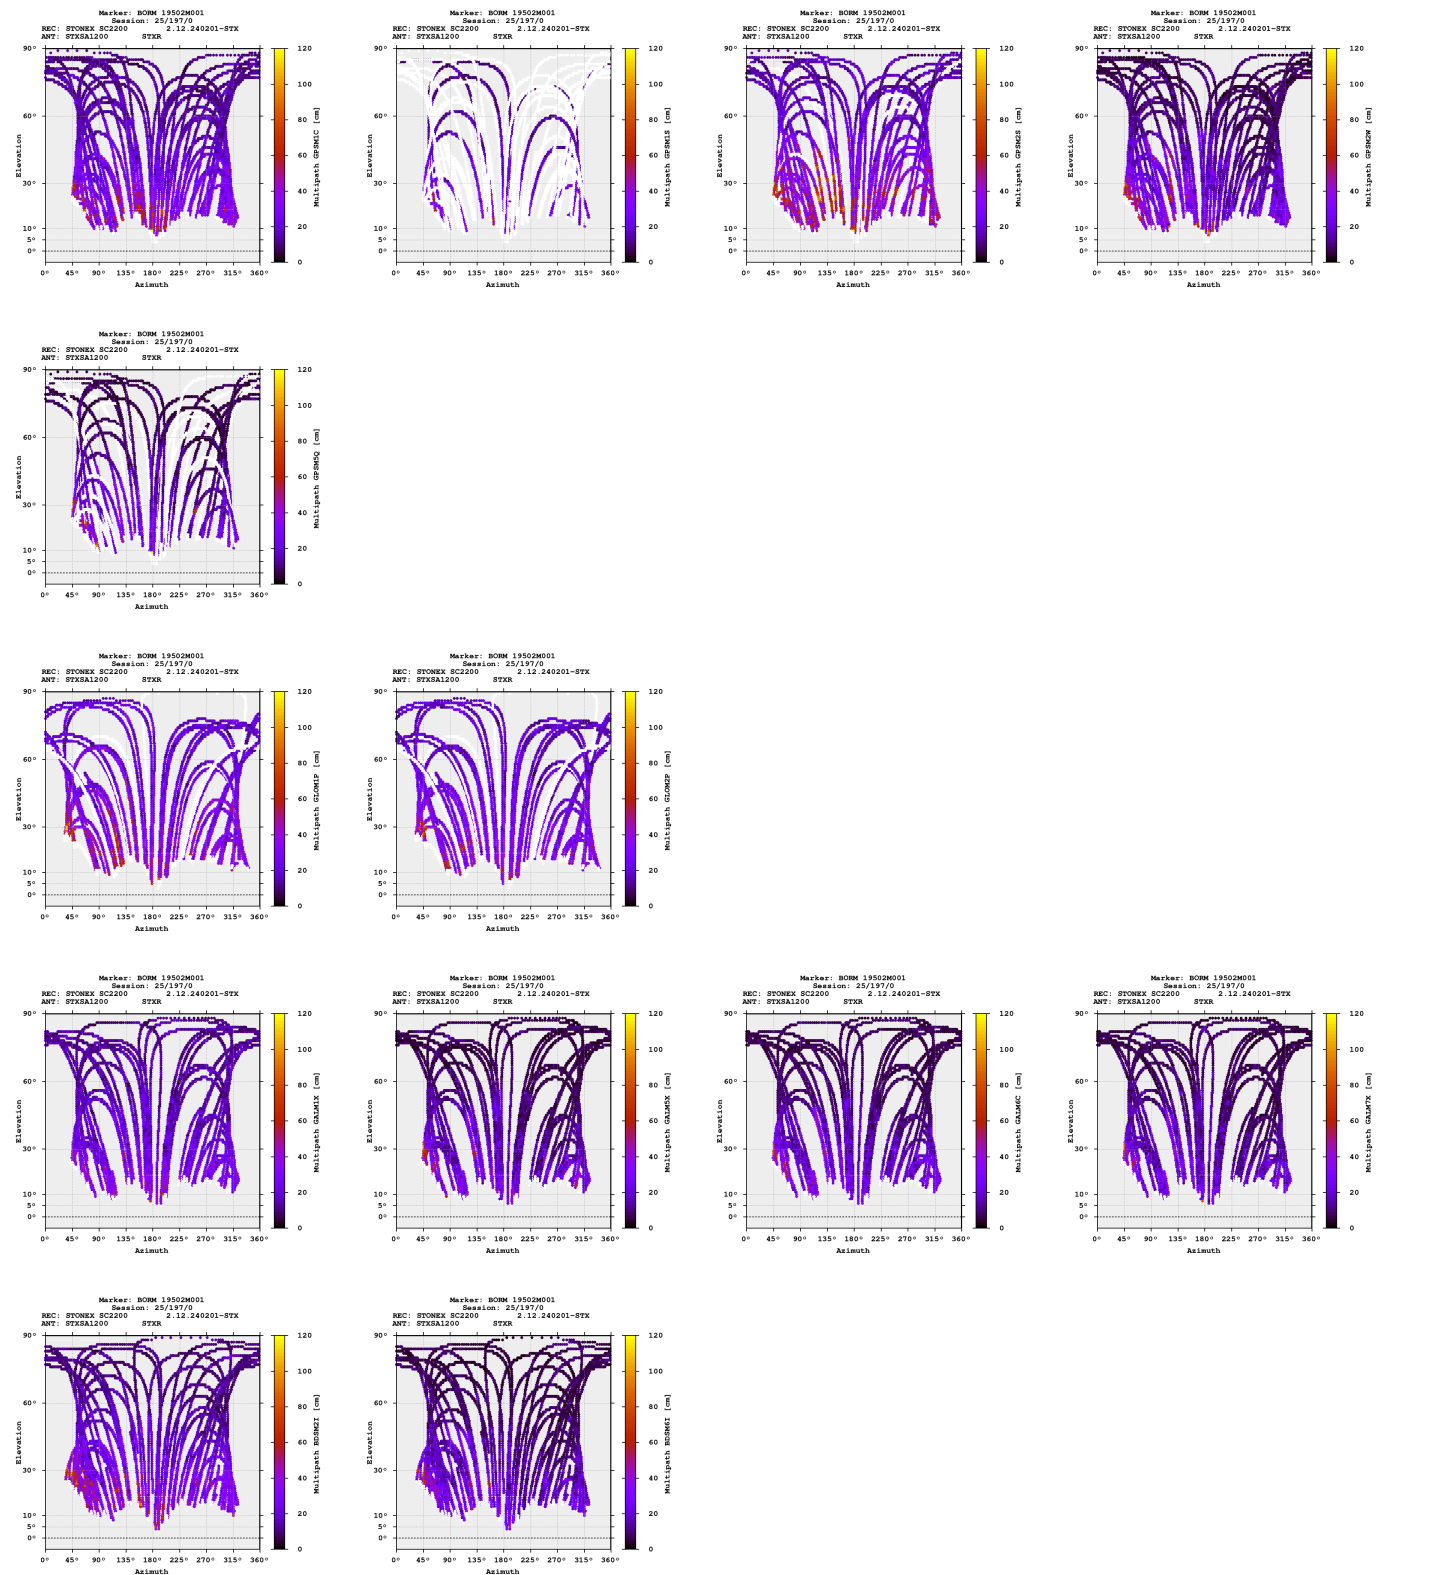


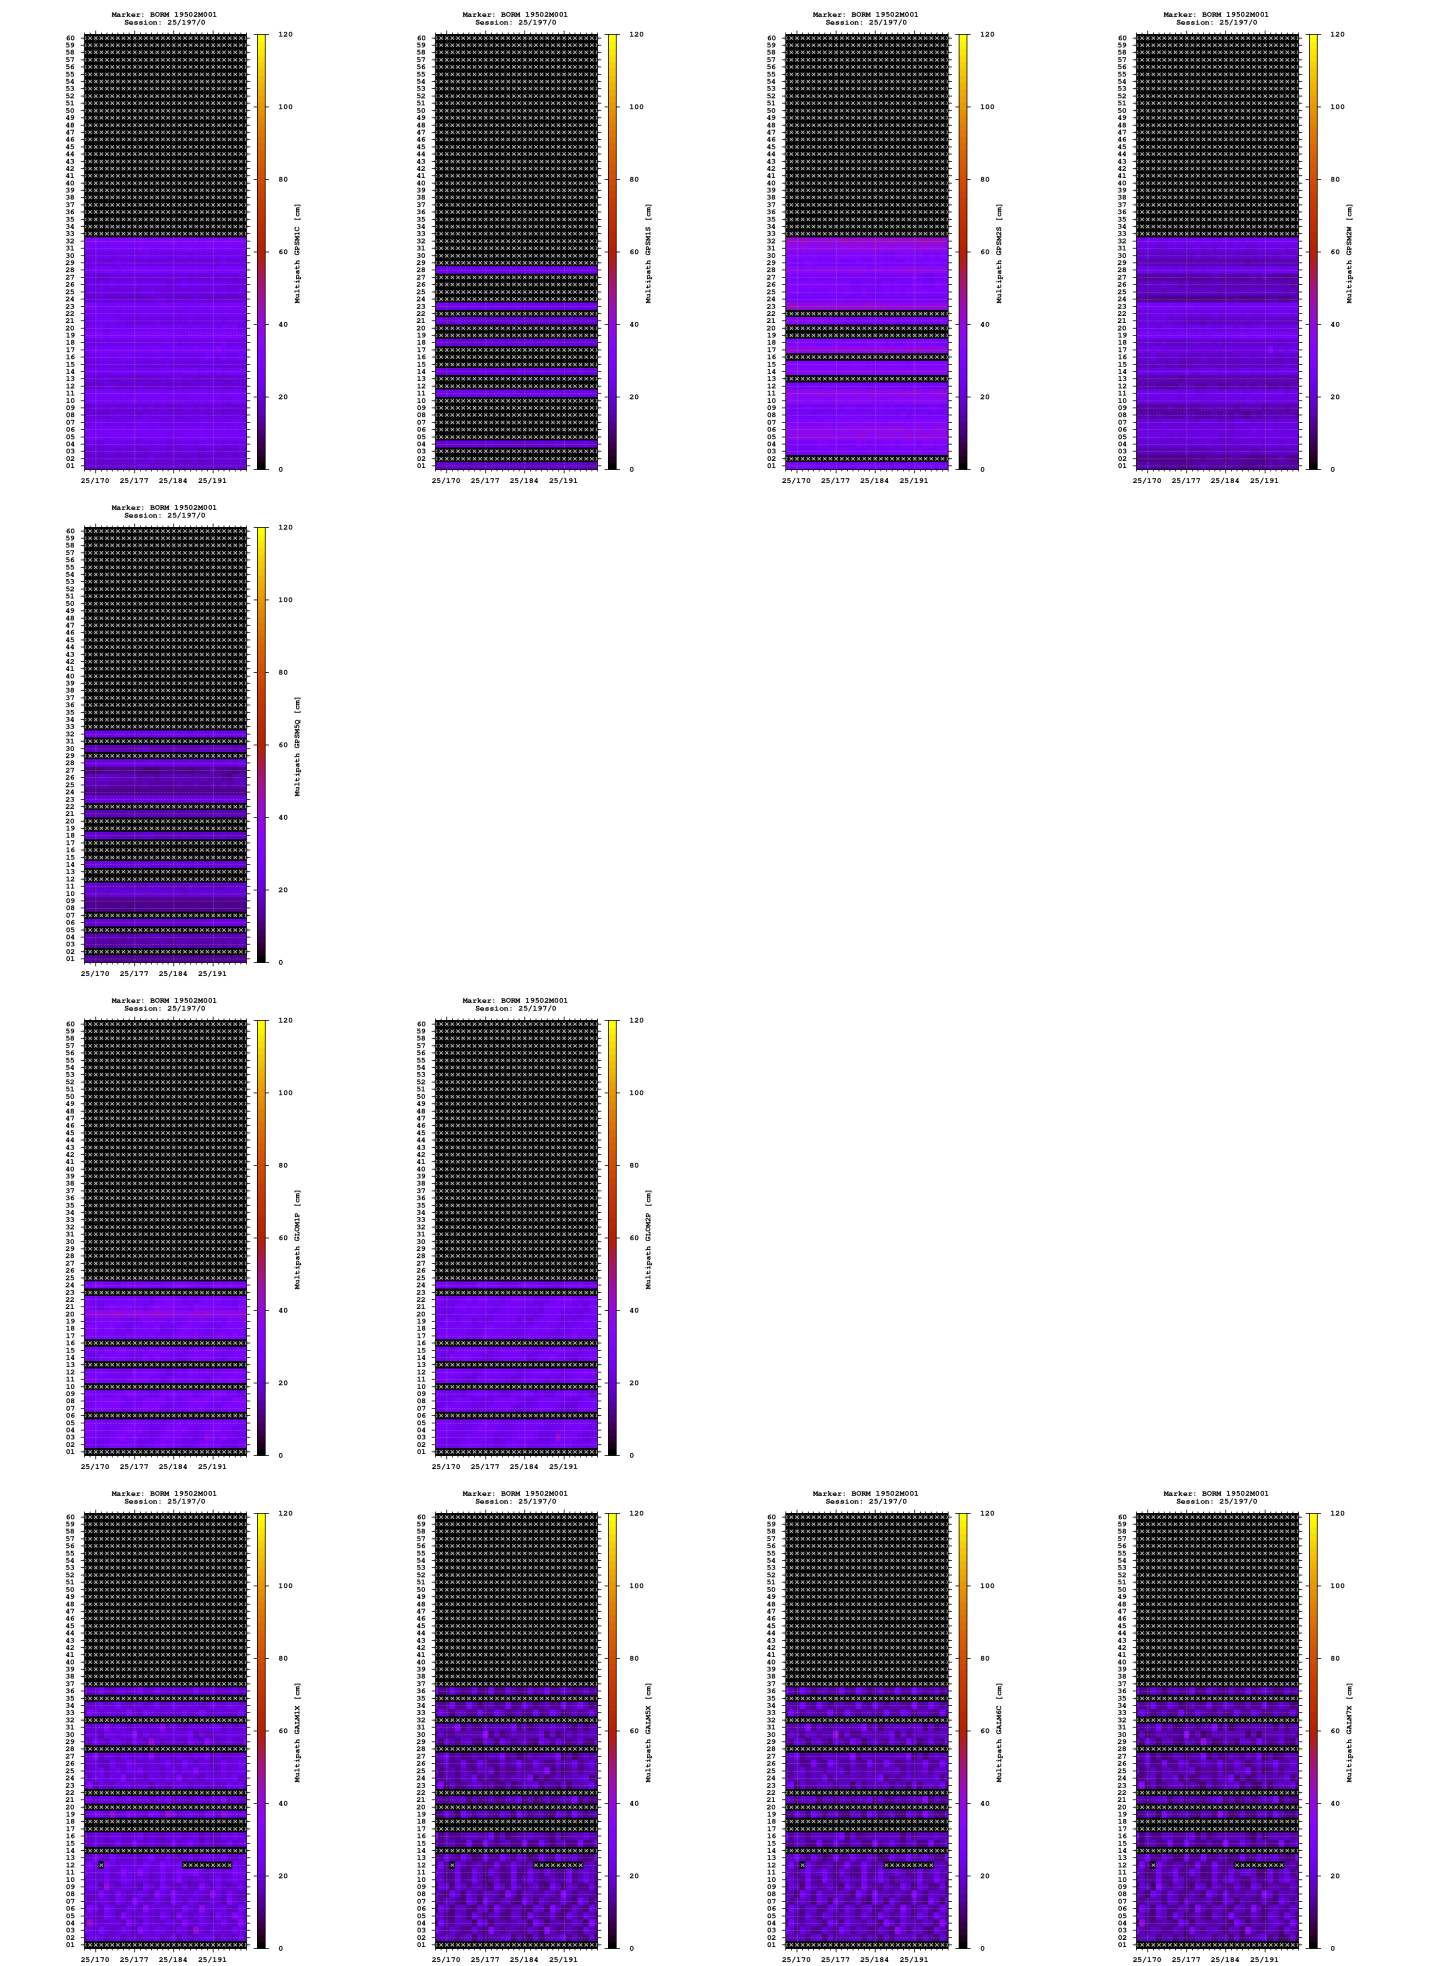


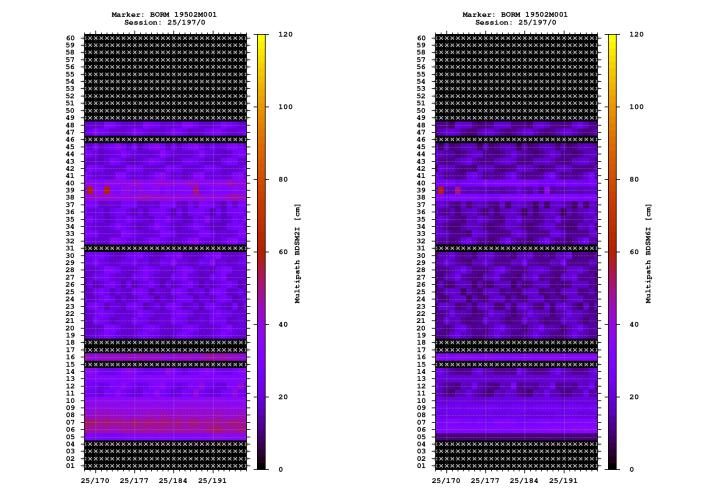


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

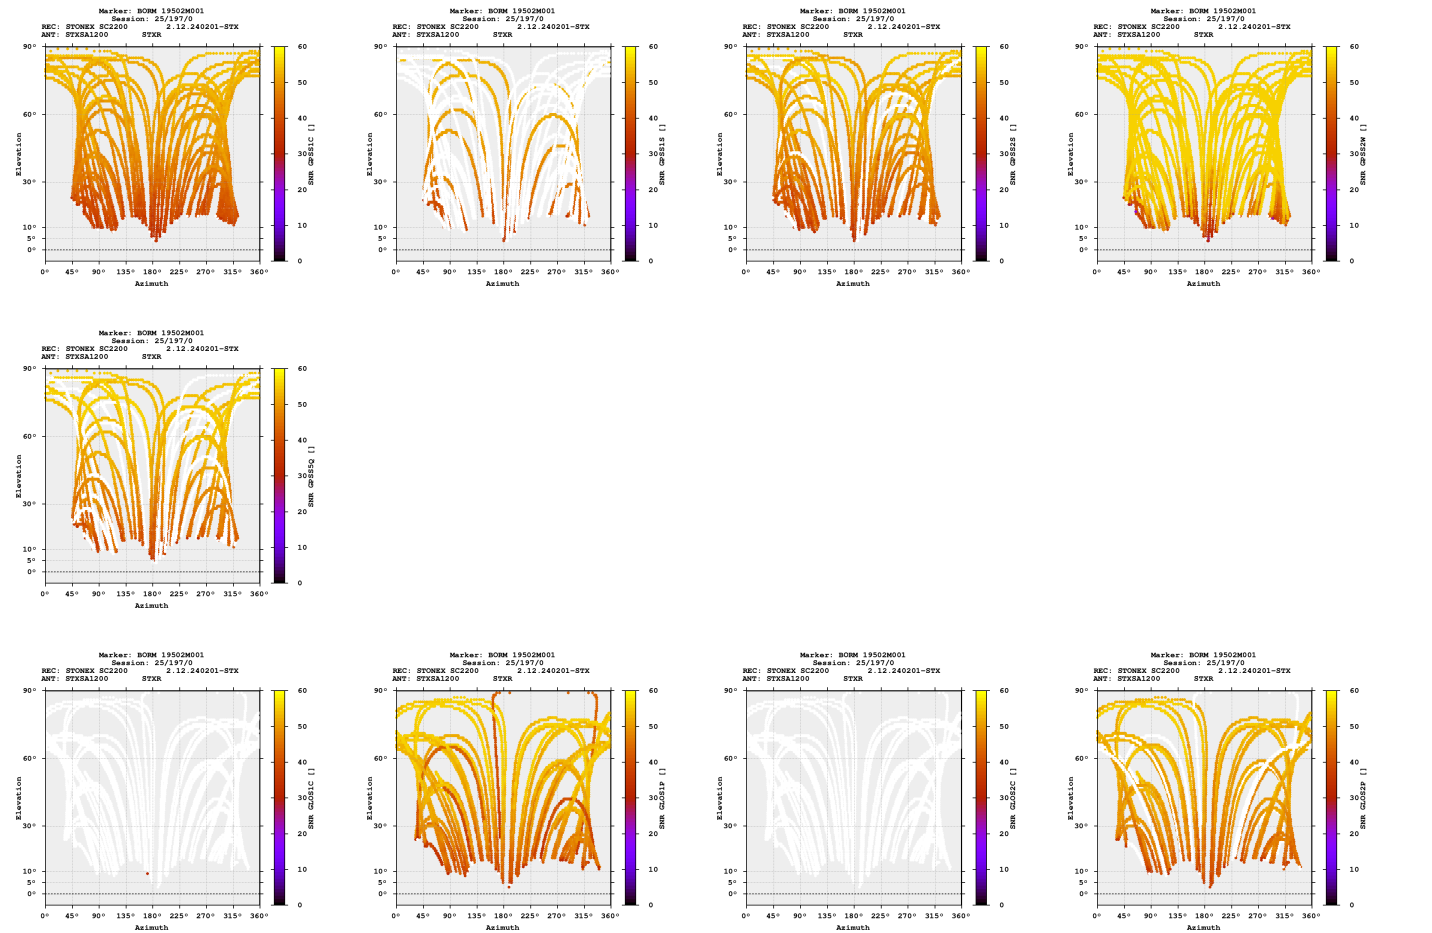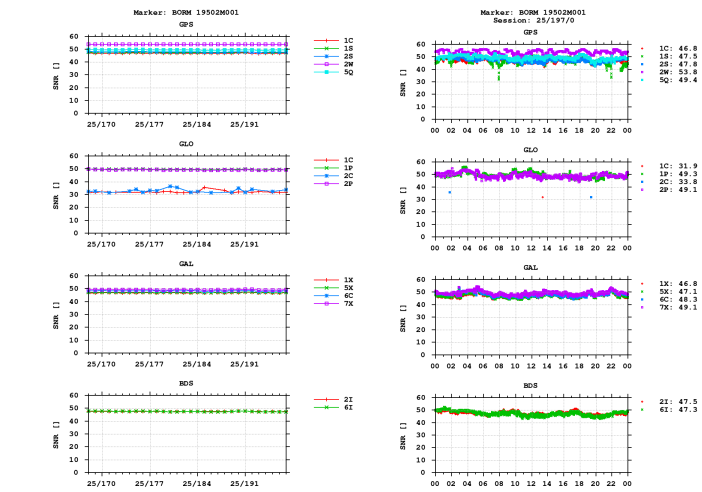


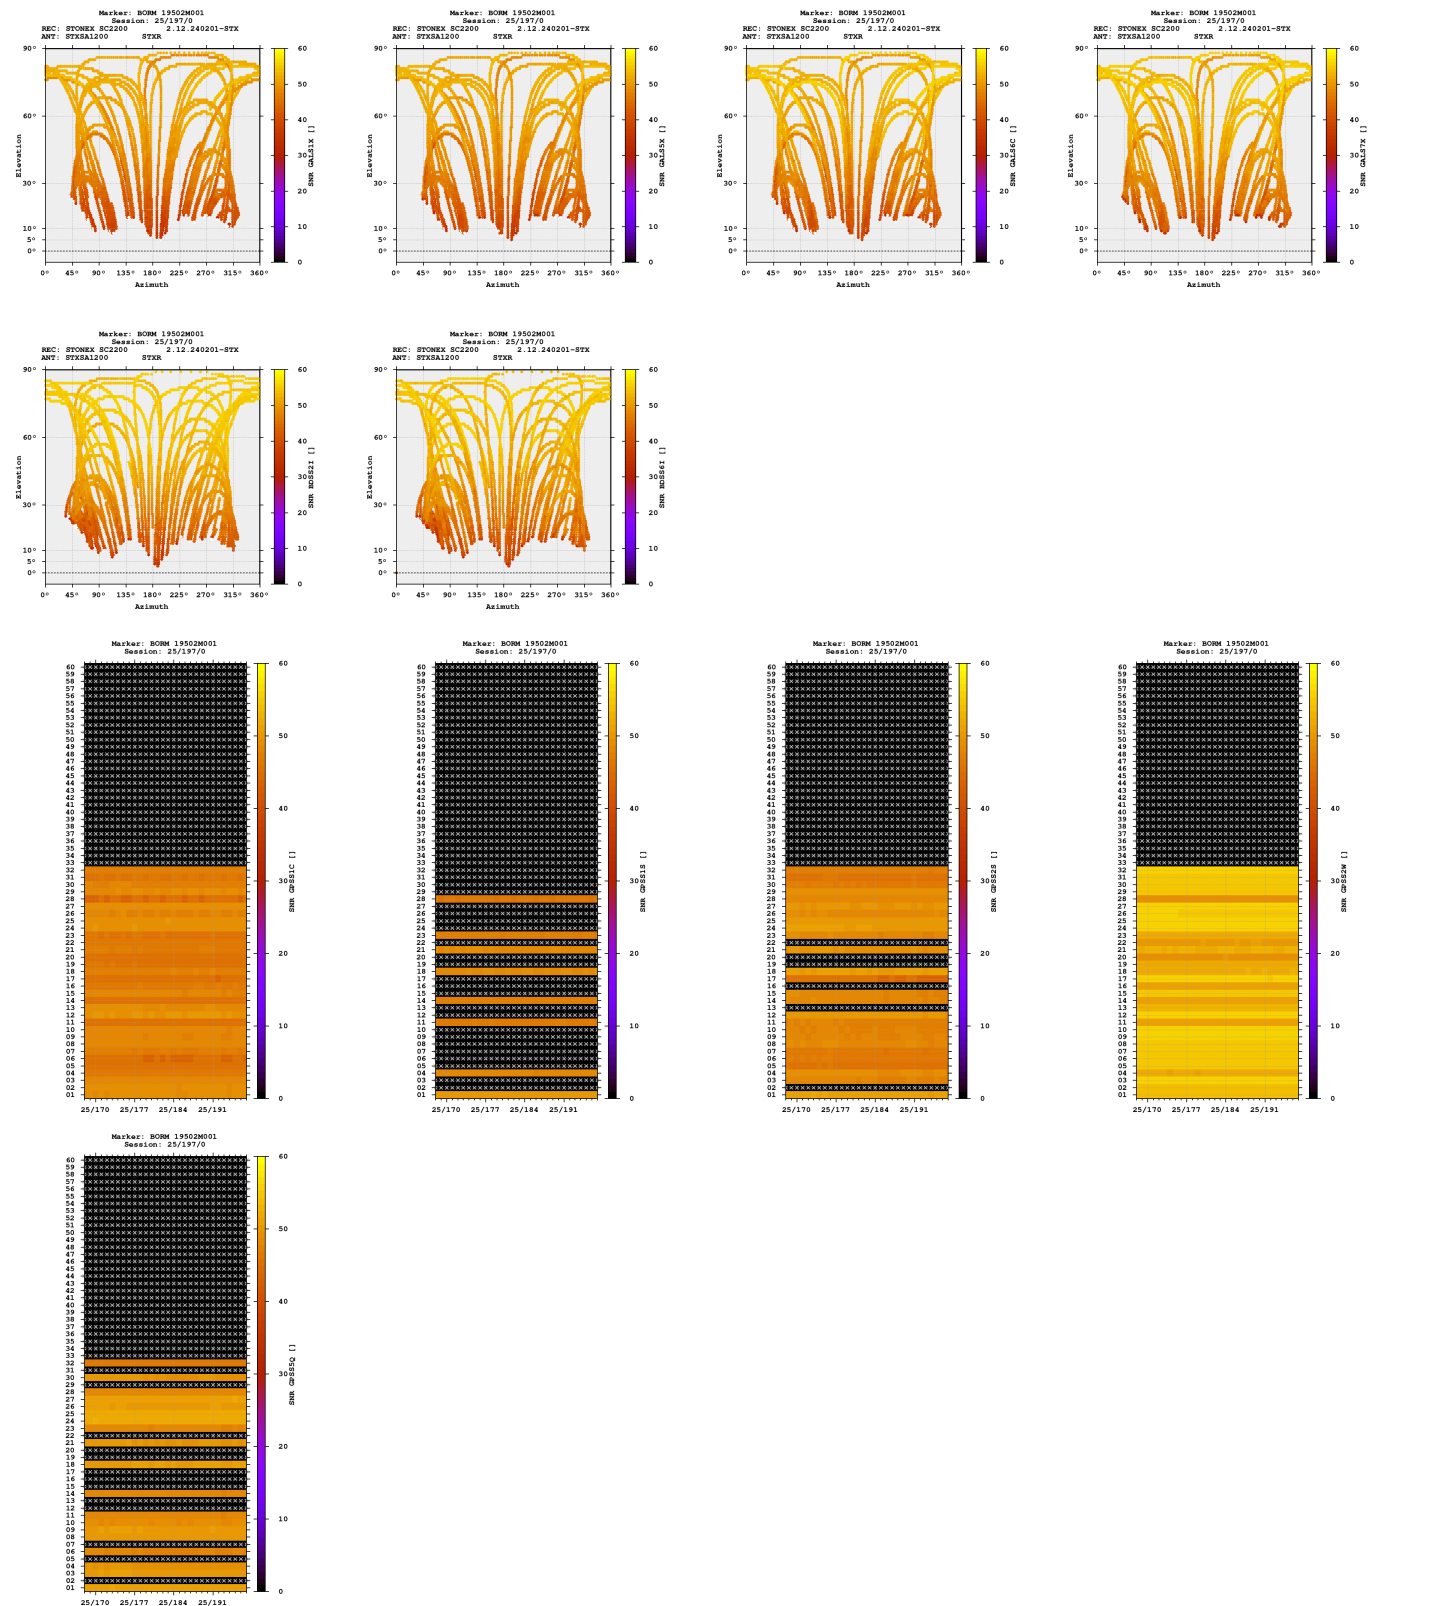

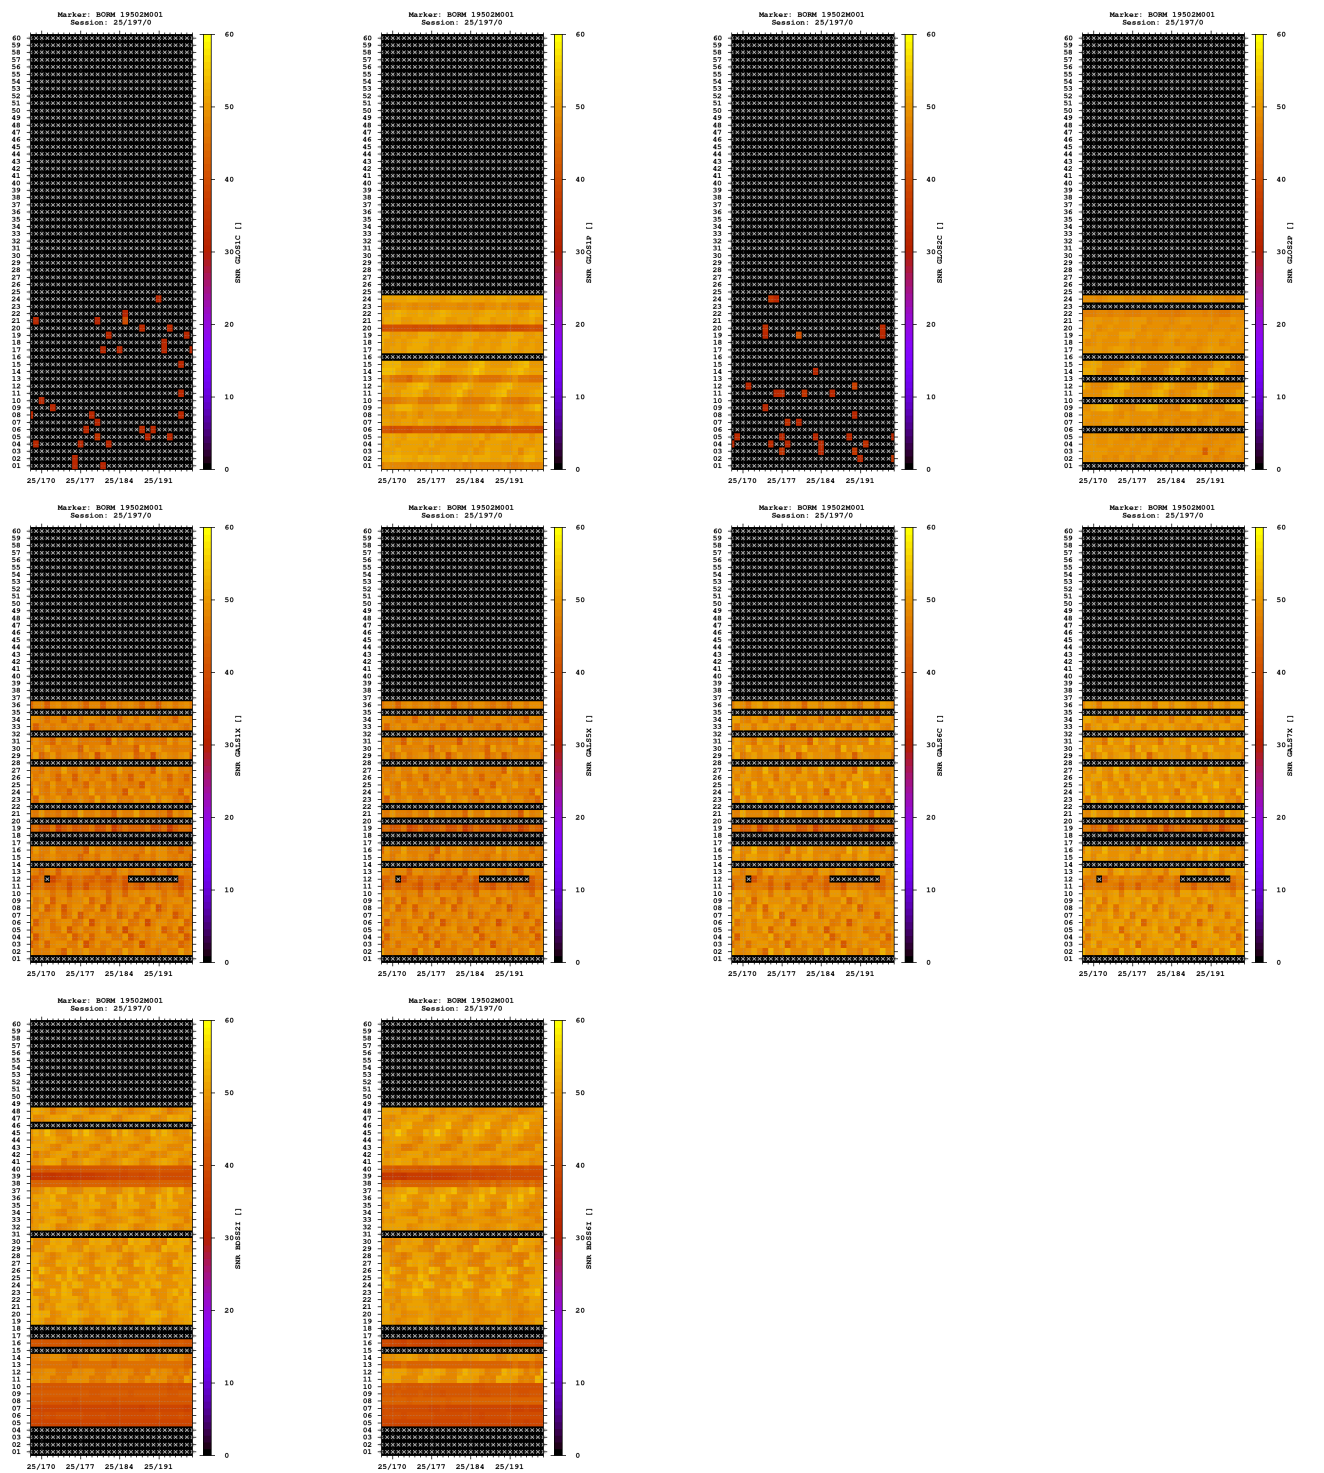

Estimates

2025-07-16 00:00:00	GPS	4329794.2319	791852.7279	4602161.4068	46.468185578	10.363981705	1263.5014
2025-07-16 00:00:00	GLO	4329796.0399	791852.3862	4602161.5982	46.468175684	10.363973294	1264.9050
2025-07-16 00:00:00	GAL	4329794.6305	791852.6760	4602161.5503	46.468184089	10.363980306	1263.9512
2025-07-16 00:00:00	BDS	4329795.1771	791852.6869	4602162.1727	46.468184425	10.363979165	1264.7742

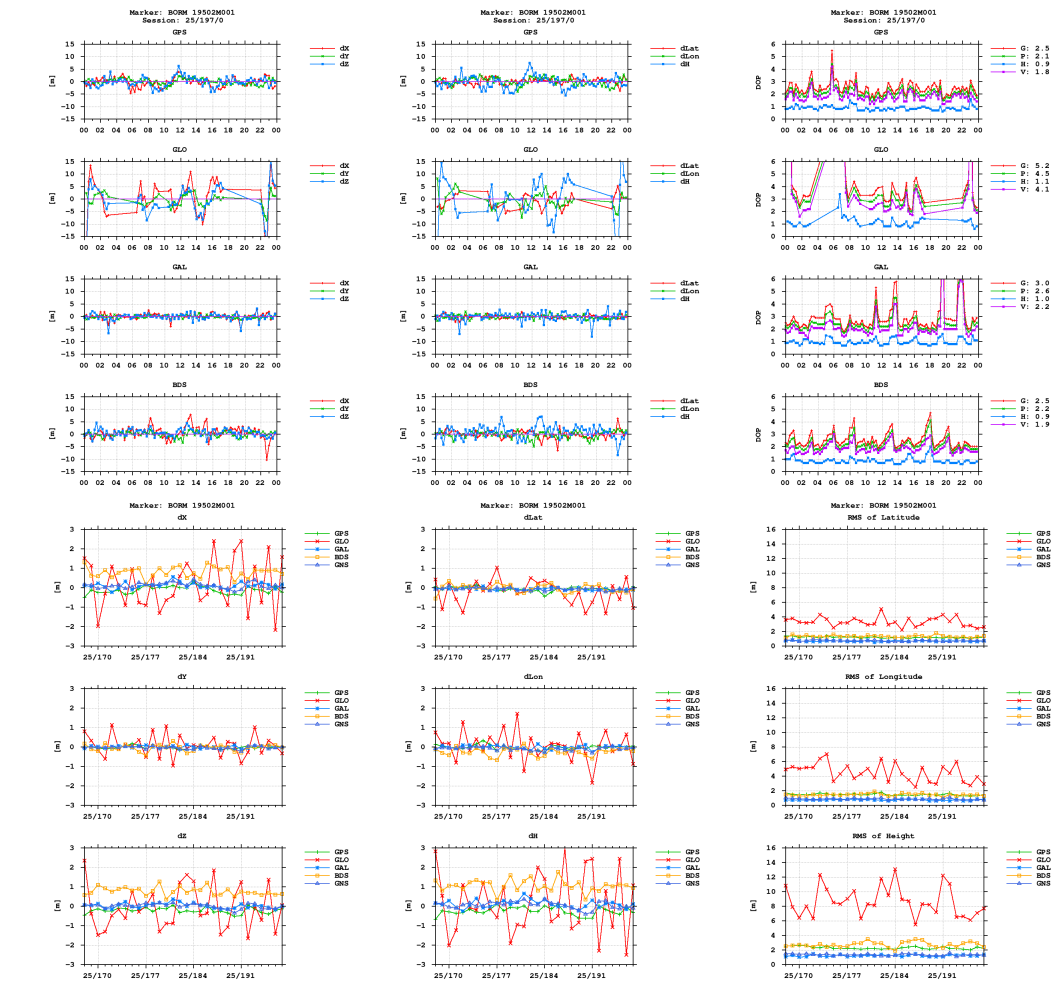

Equipment

2025-06-17 00:00:00 STONEX SC2200 2.12.240201-STX SC22E106 STONEX SC2

Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)