

GNSS observation file monitoring for BOUR

Last RINEX file: BOUR1970.25D.Z


RINEX version: 3.04

Marker: BOUR

Receiver: 1873171 LEICA GR50 4.83/7.900

Antenna: 199228 TRM33429.20+GP NONE


Epochs

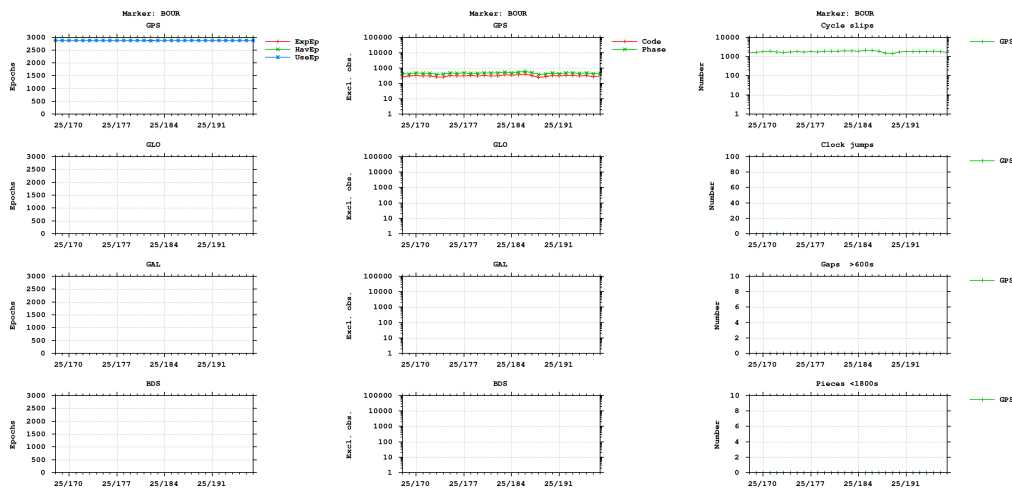


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.



- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites




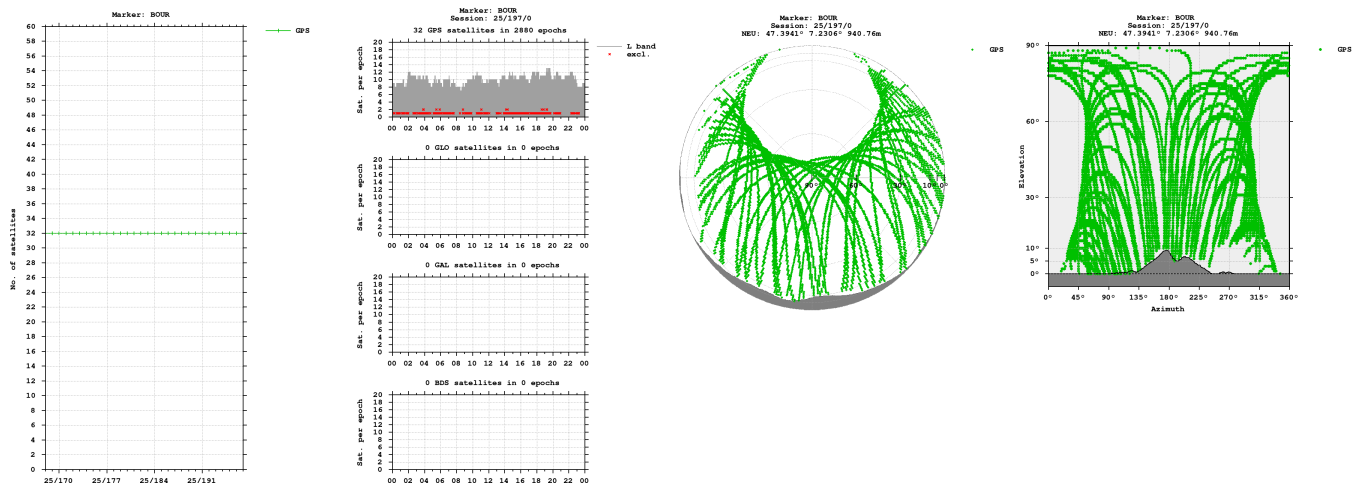


Bands




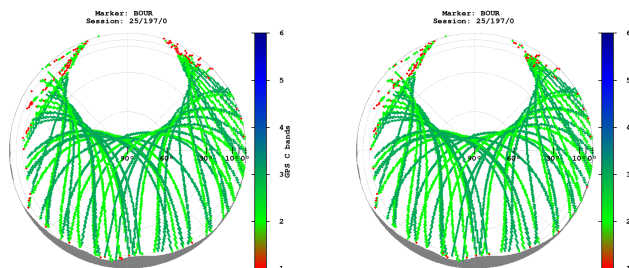


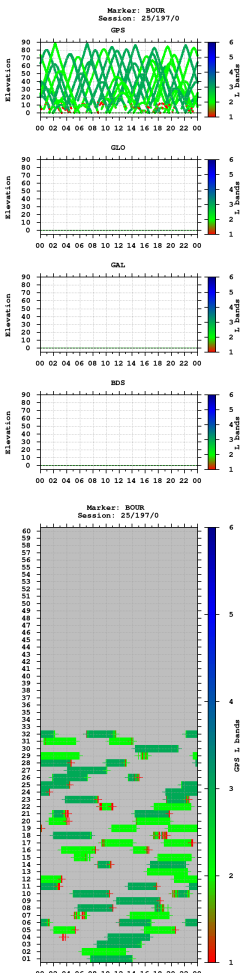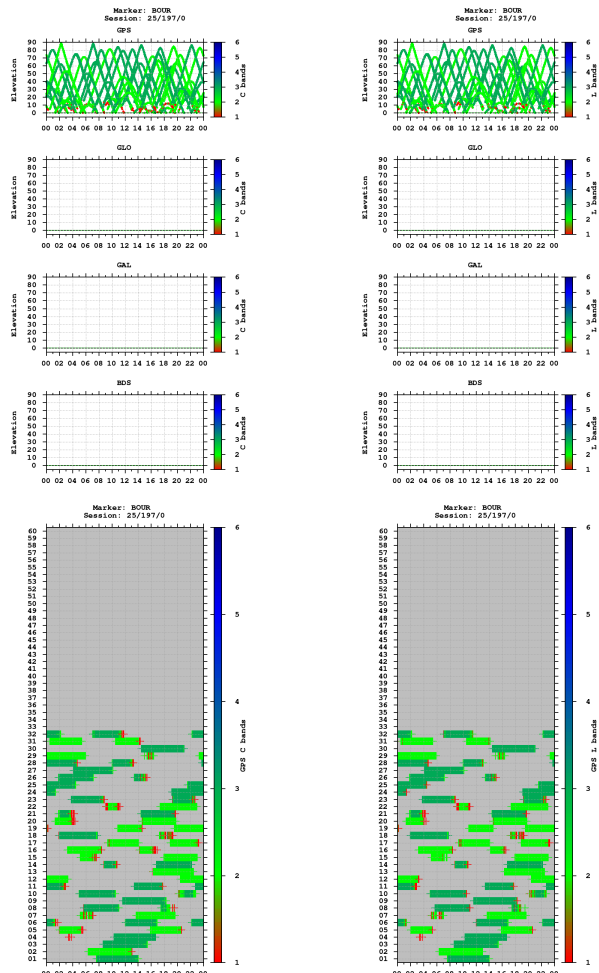


Observations

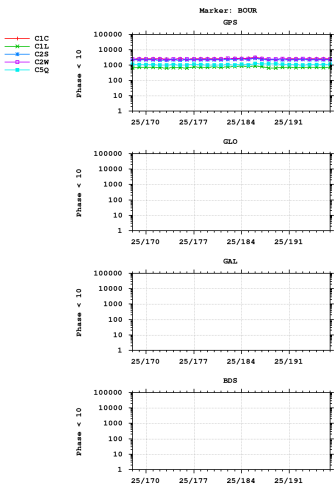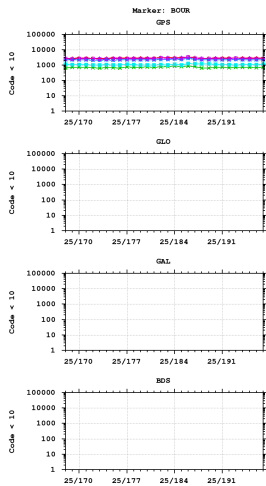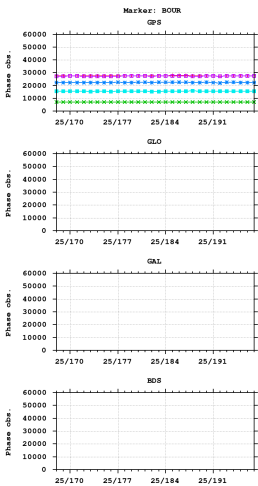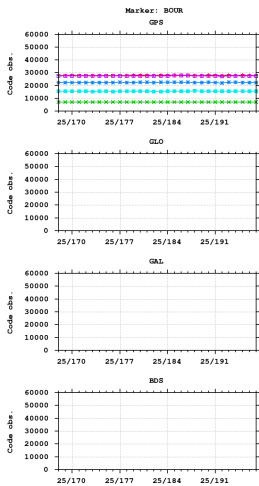



Cycle slips



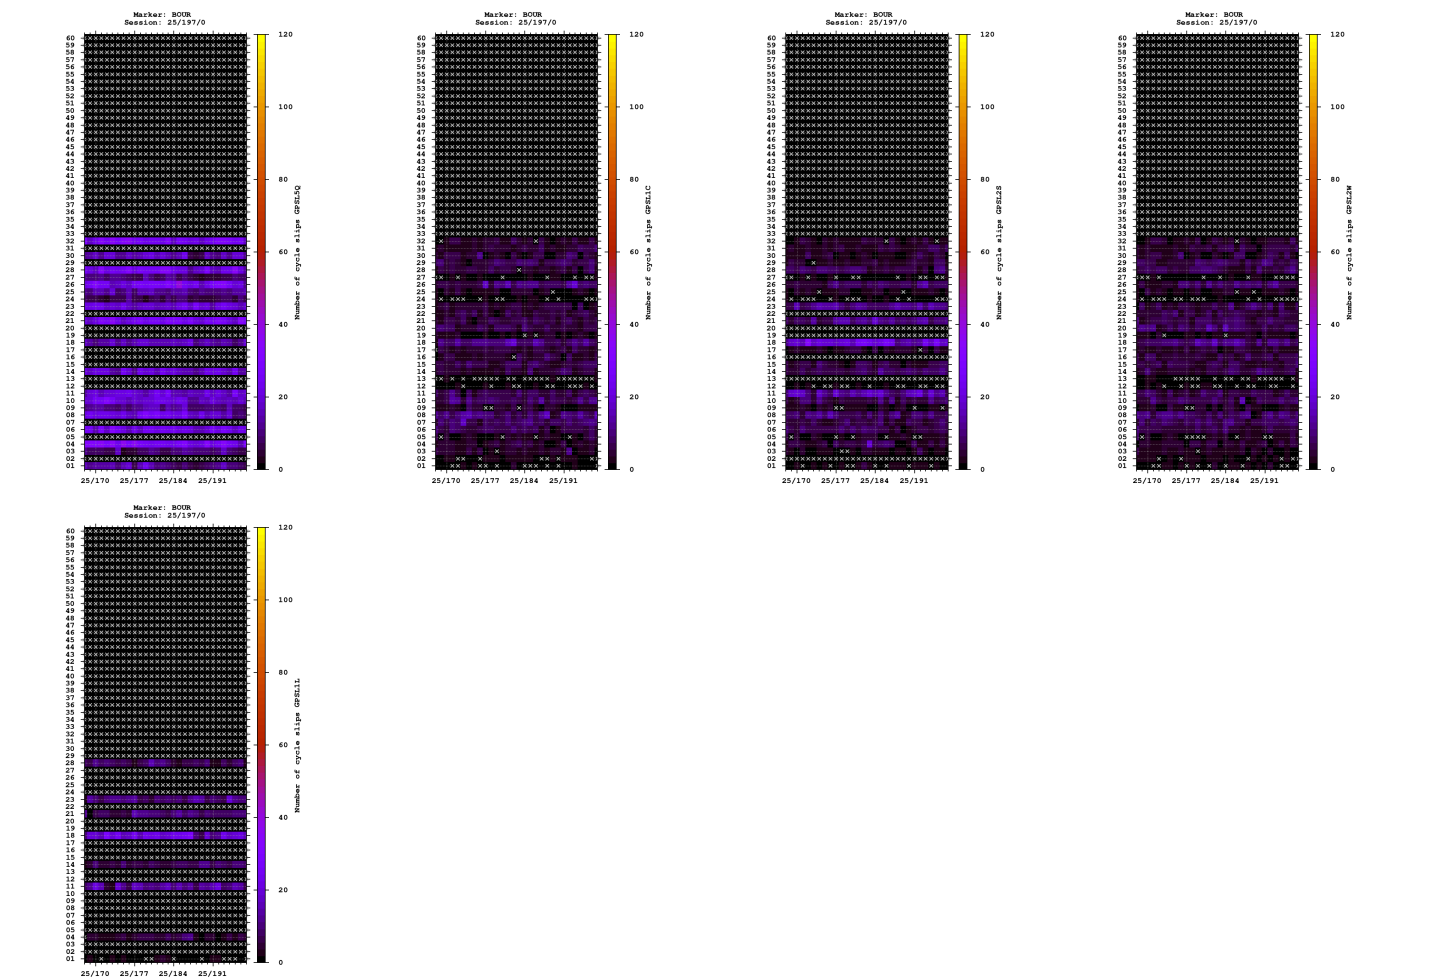


Multipath

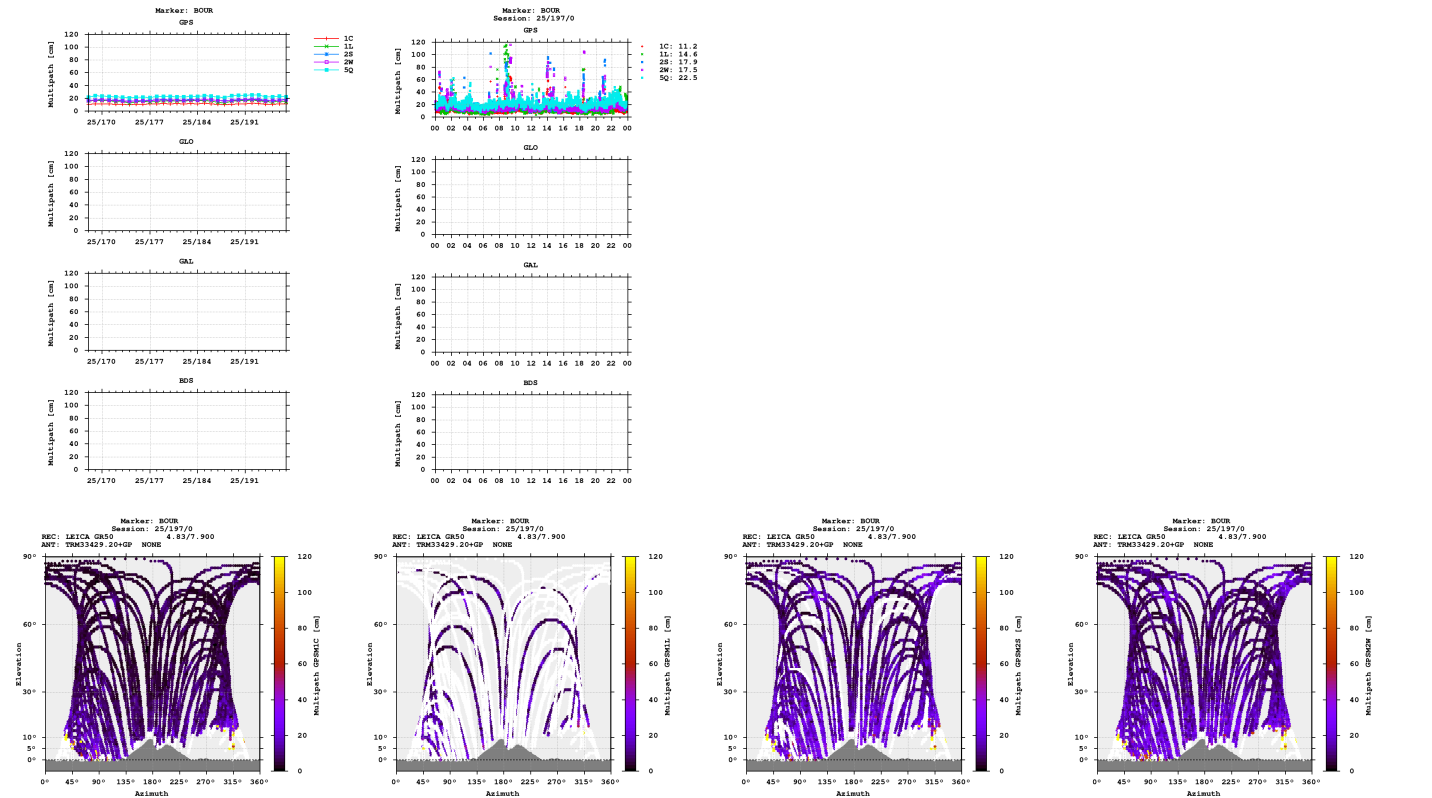


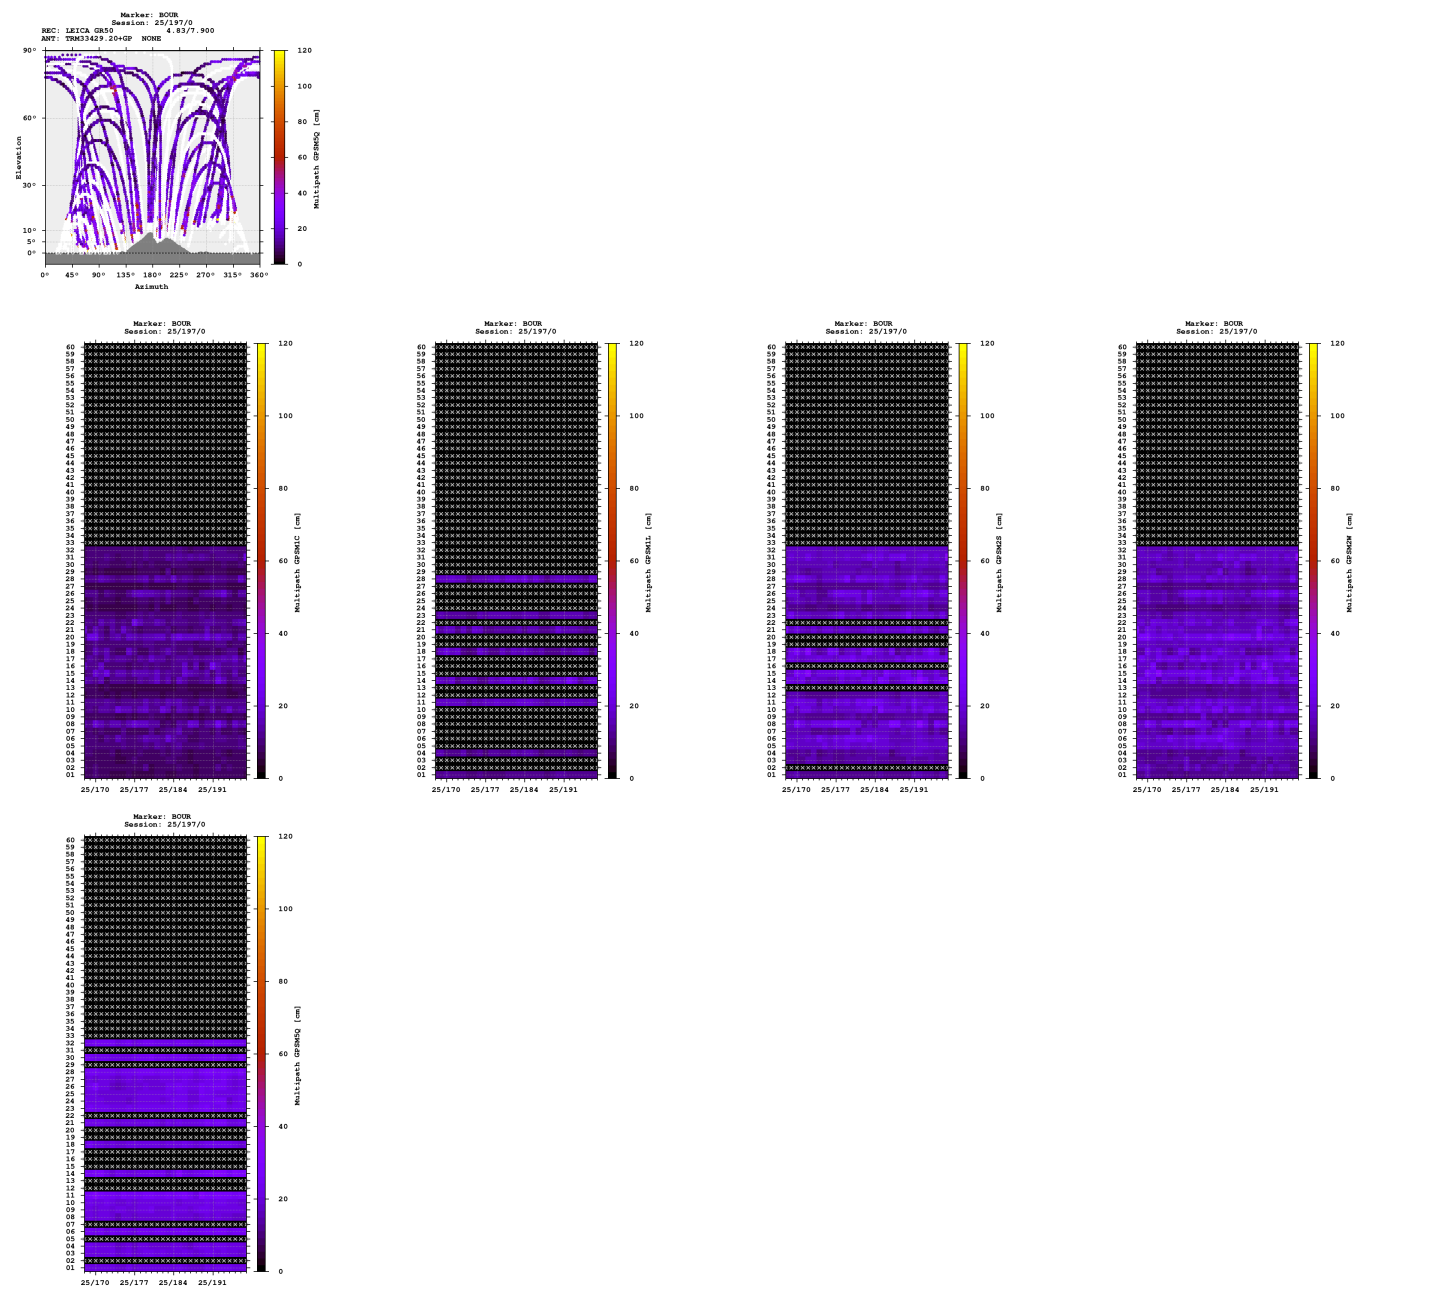

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

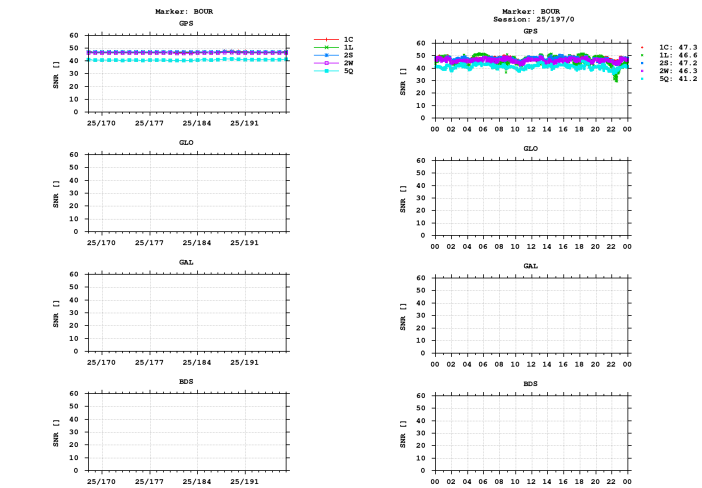

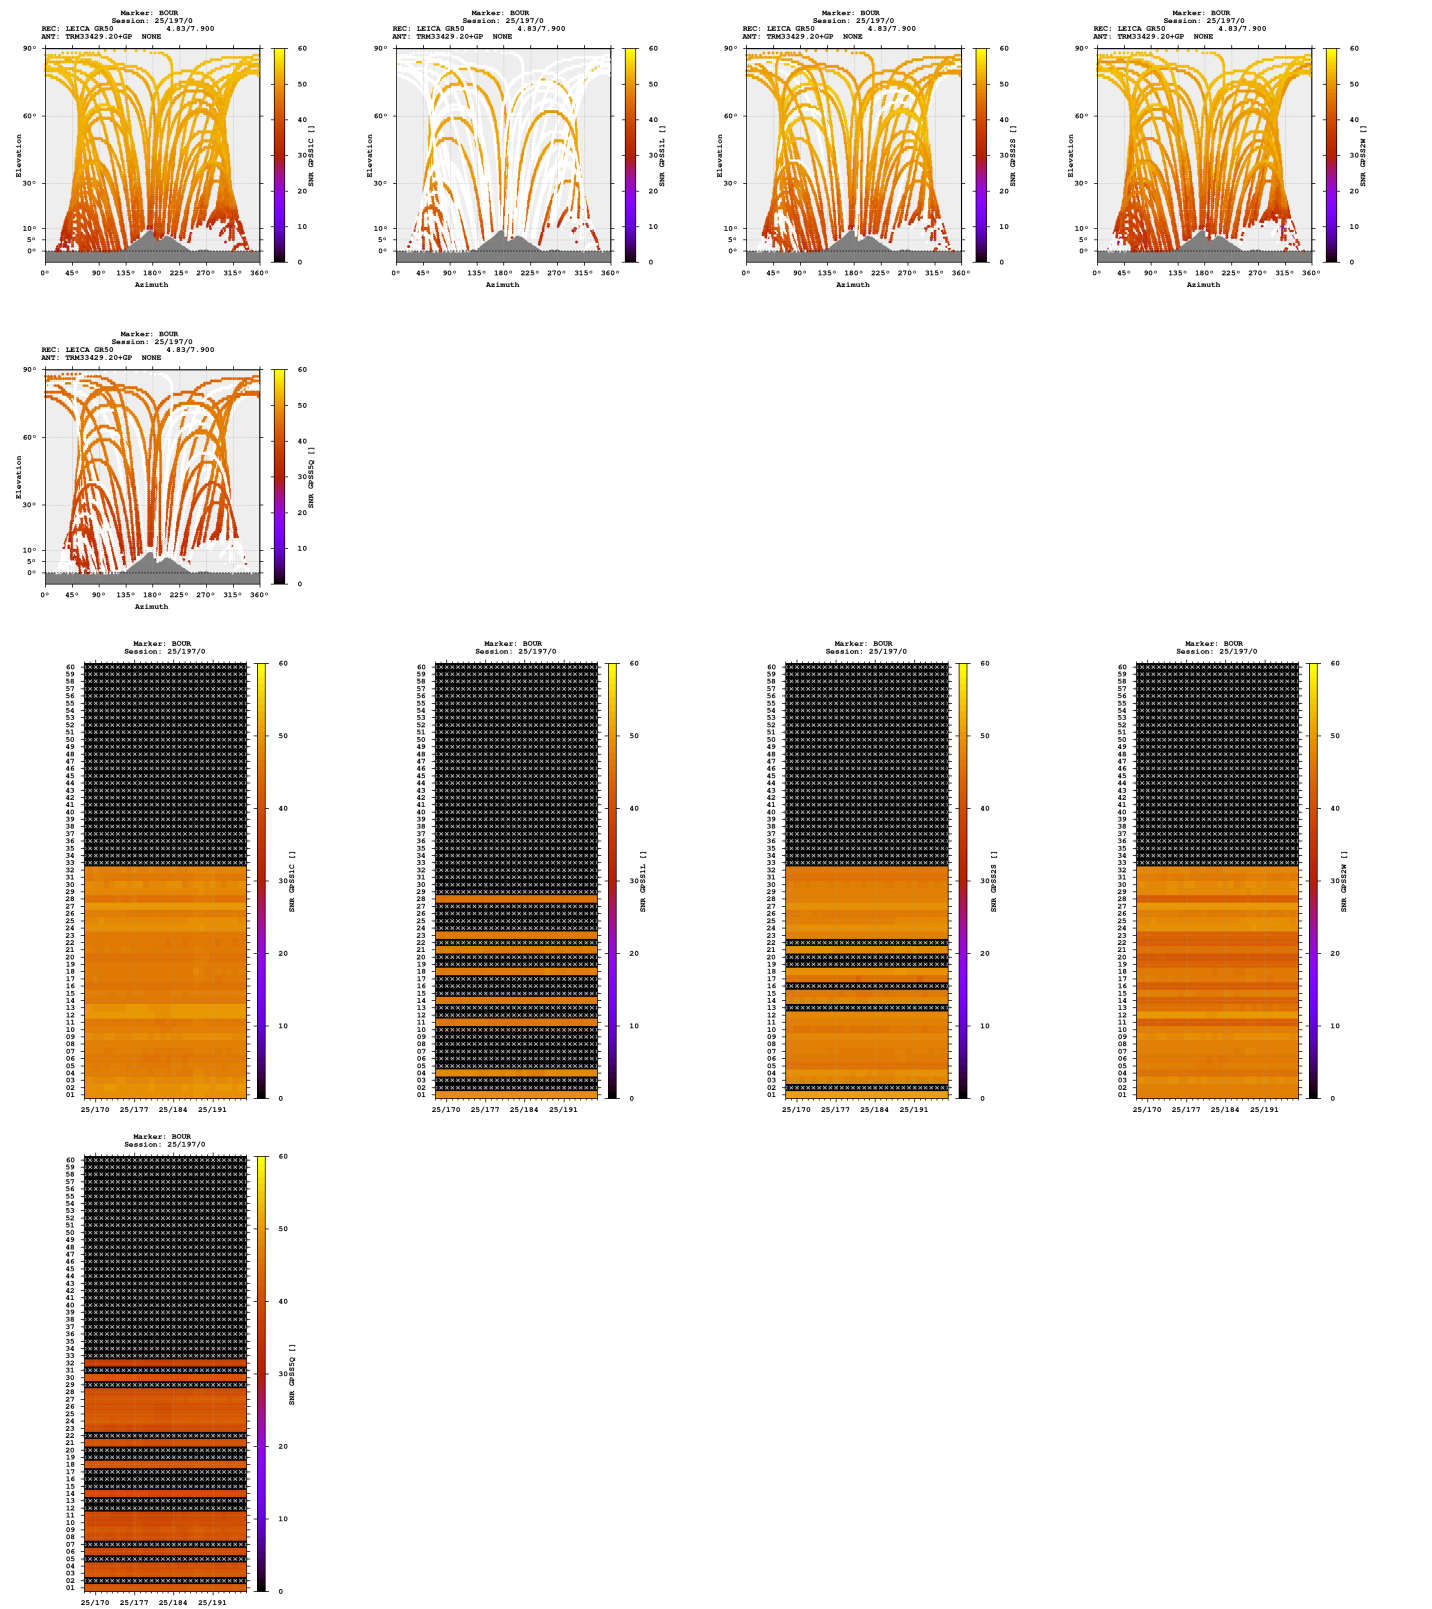

Estimates

2025-07-16 00:00:00 GPS 4291771.7897 544505.3539 4672230.9655 47.394141932 7.230595324 940.7565

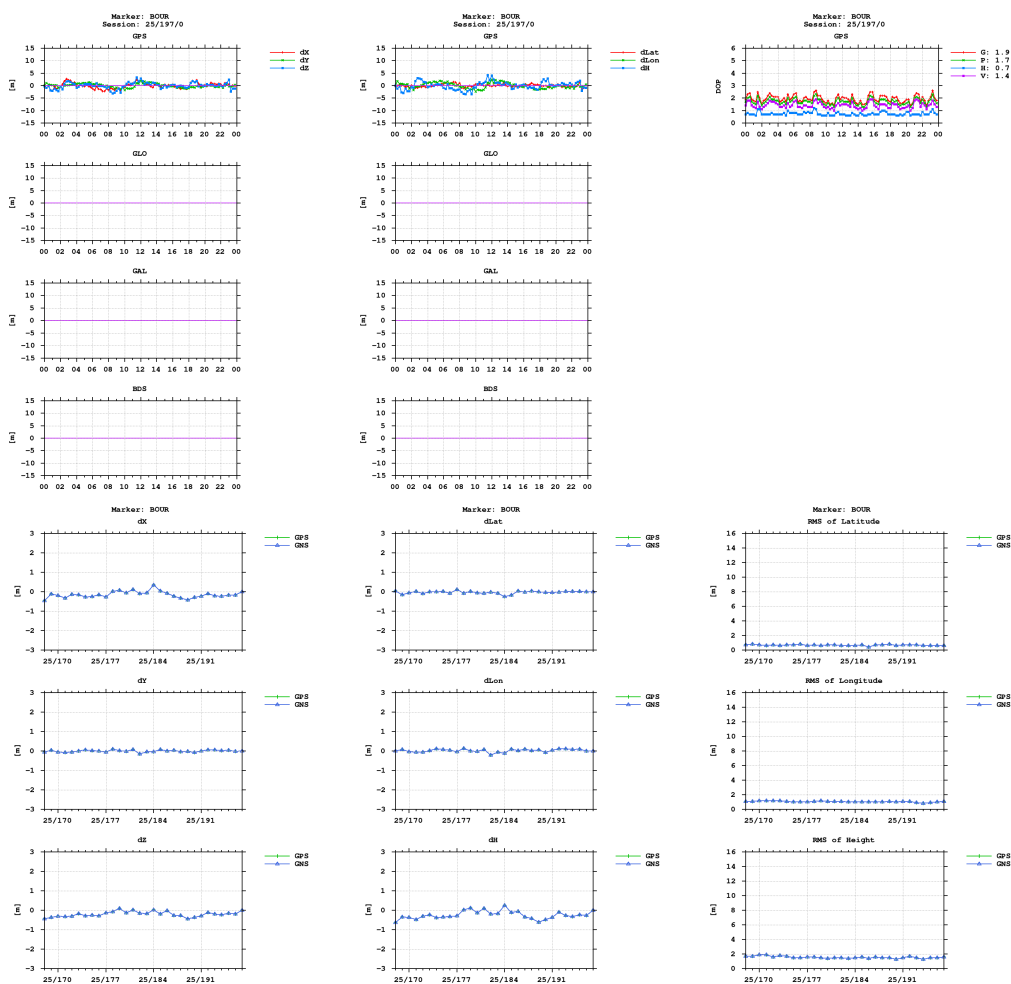

Equipment

2025-06-17 00:00:00 LEICA GR50 4.83/7.900 1873171 LEICA GR50

Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)