

GNSS observation file monitoring for BRST

Last RINEX file: BRST1970.25D.Z


RINEX version: 3.04

Marker: BRST 10004M004

Receiver: 5818R400 TRIMBLE ALLOY 6.23

Antenna: 1441017048 TRM57971.00 NONE


Epochs

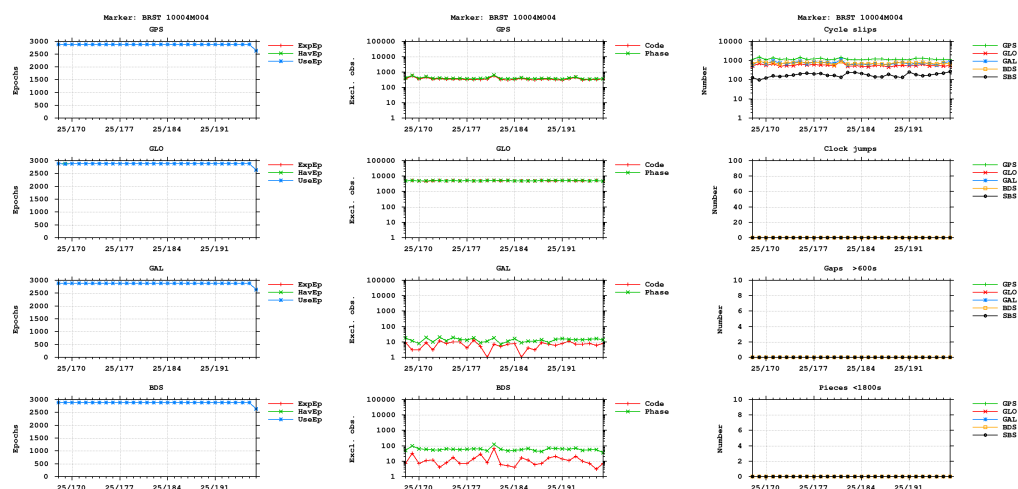


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

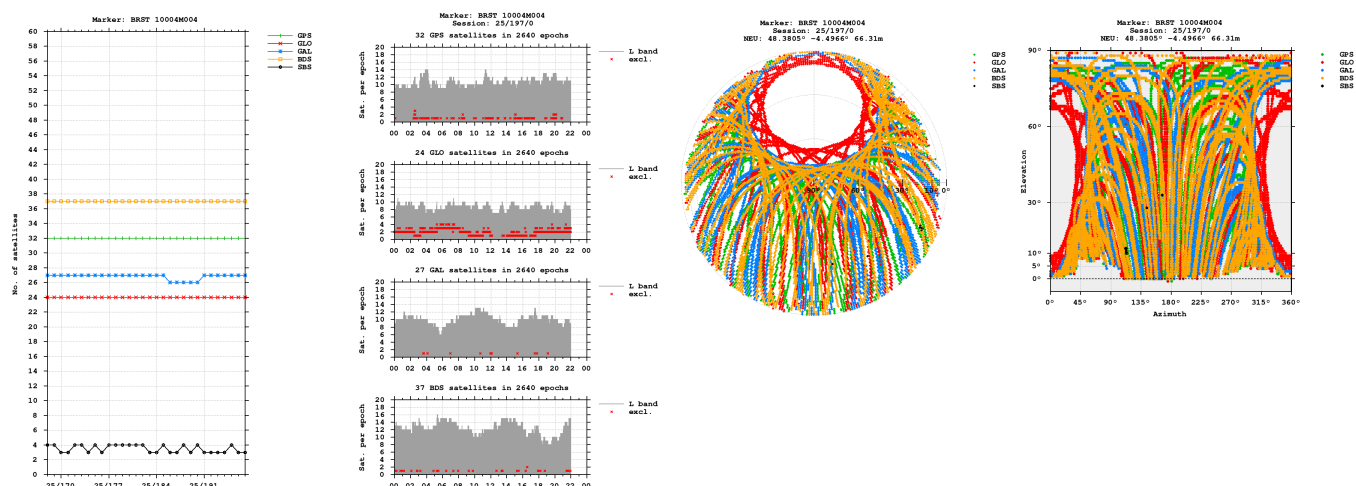


Bands

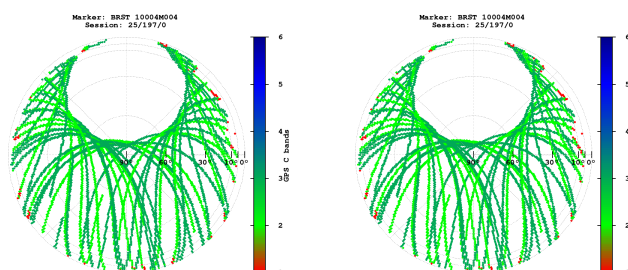


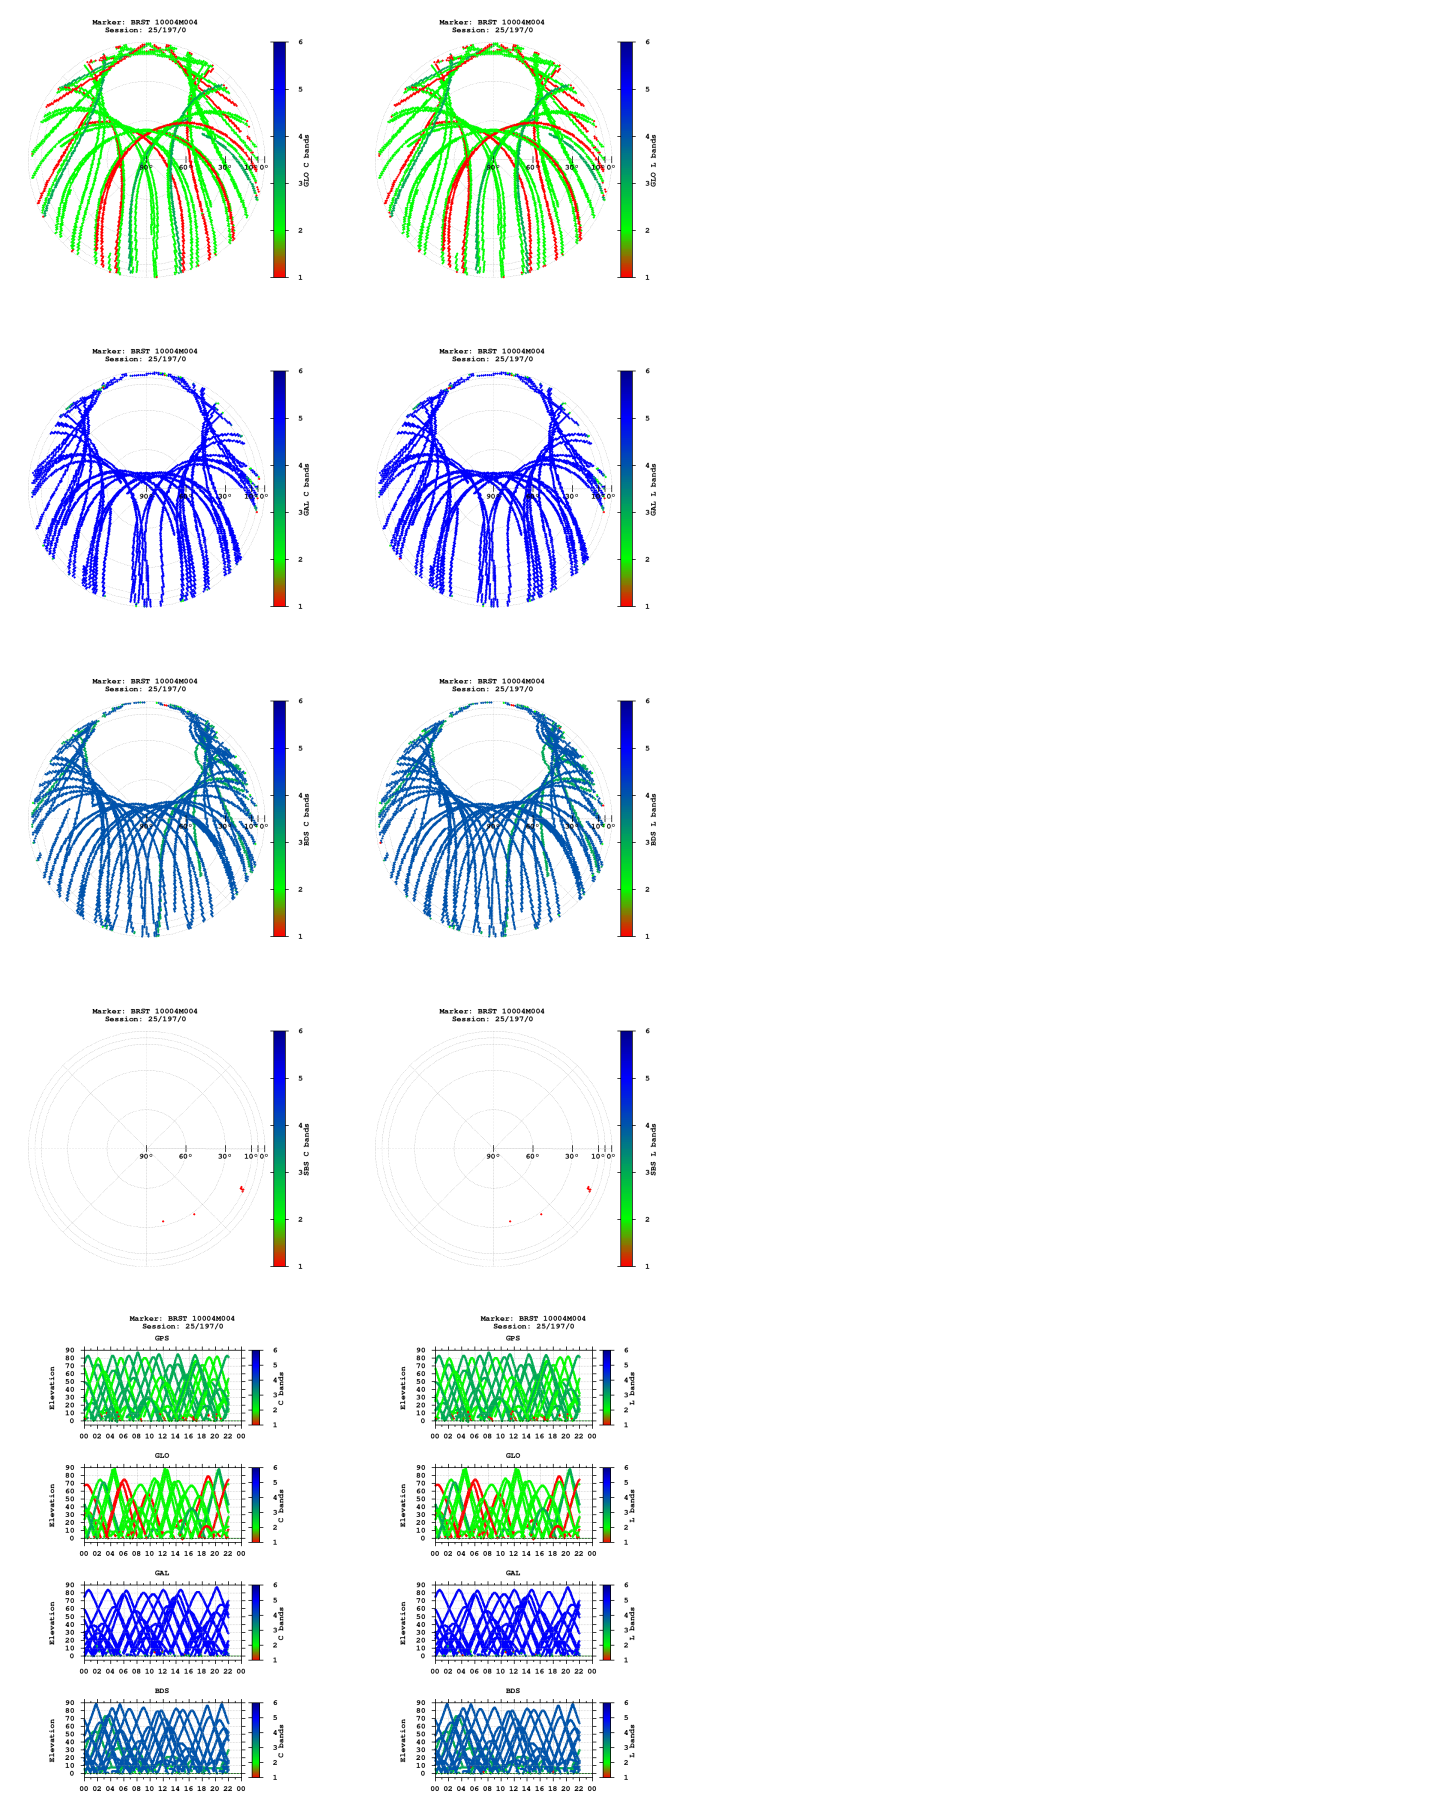

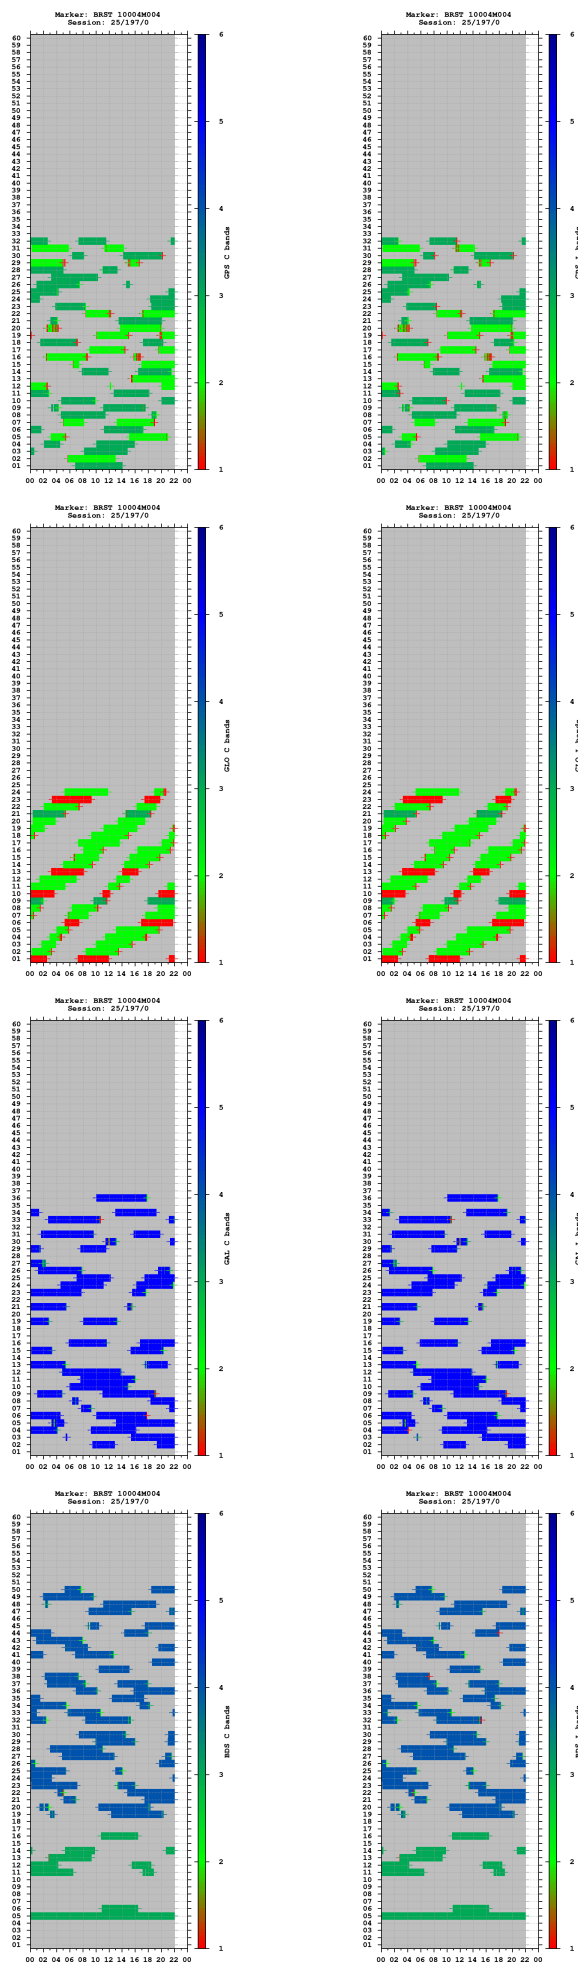


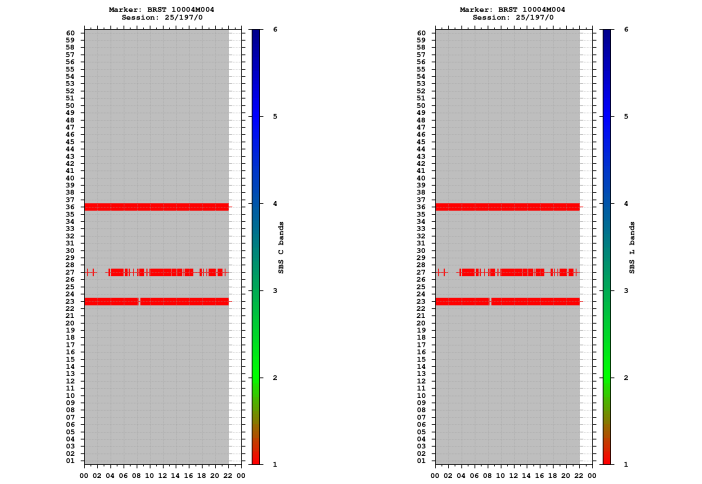



Observations

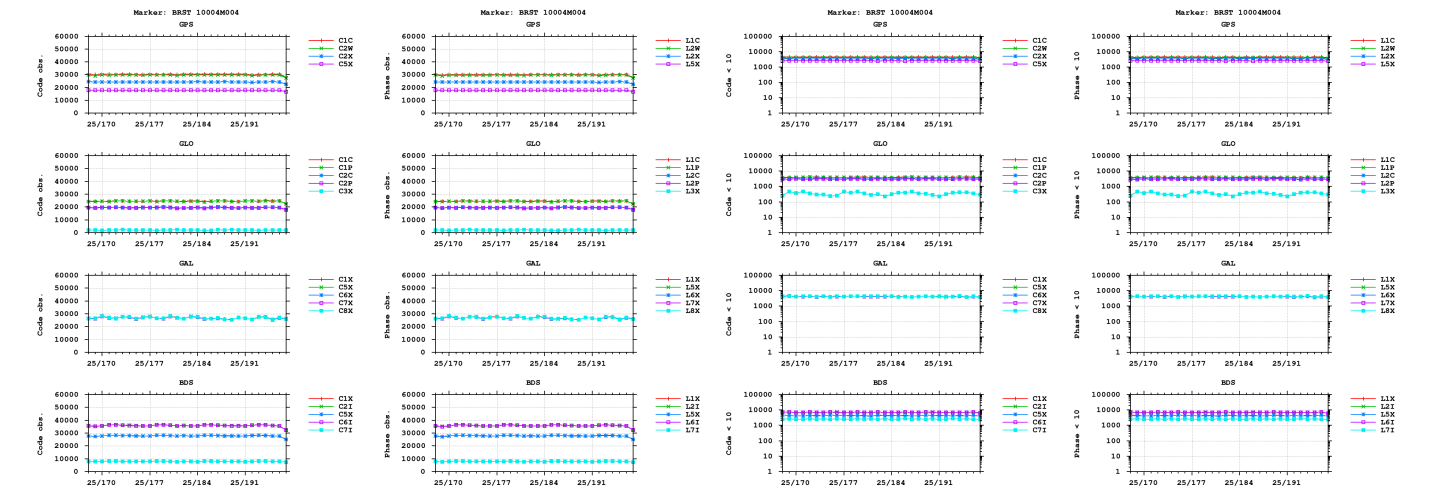

Cycle slips

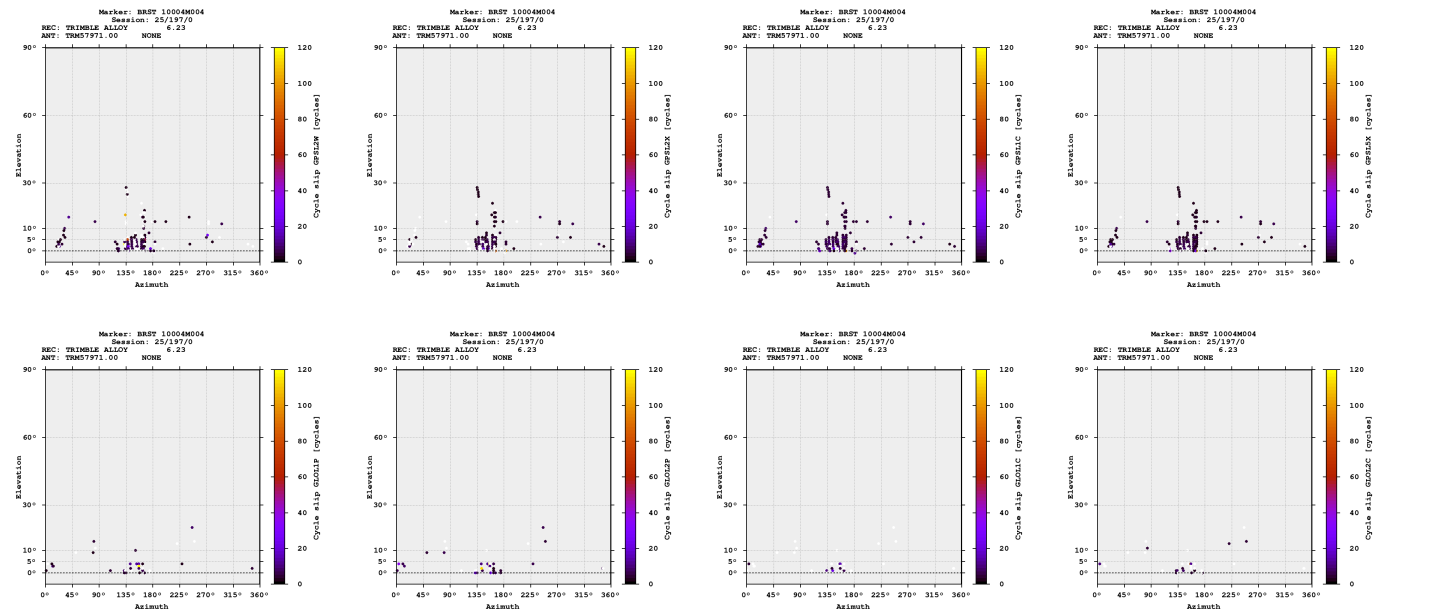




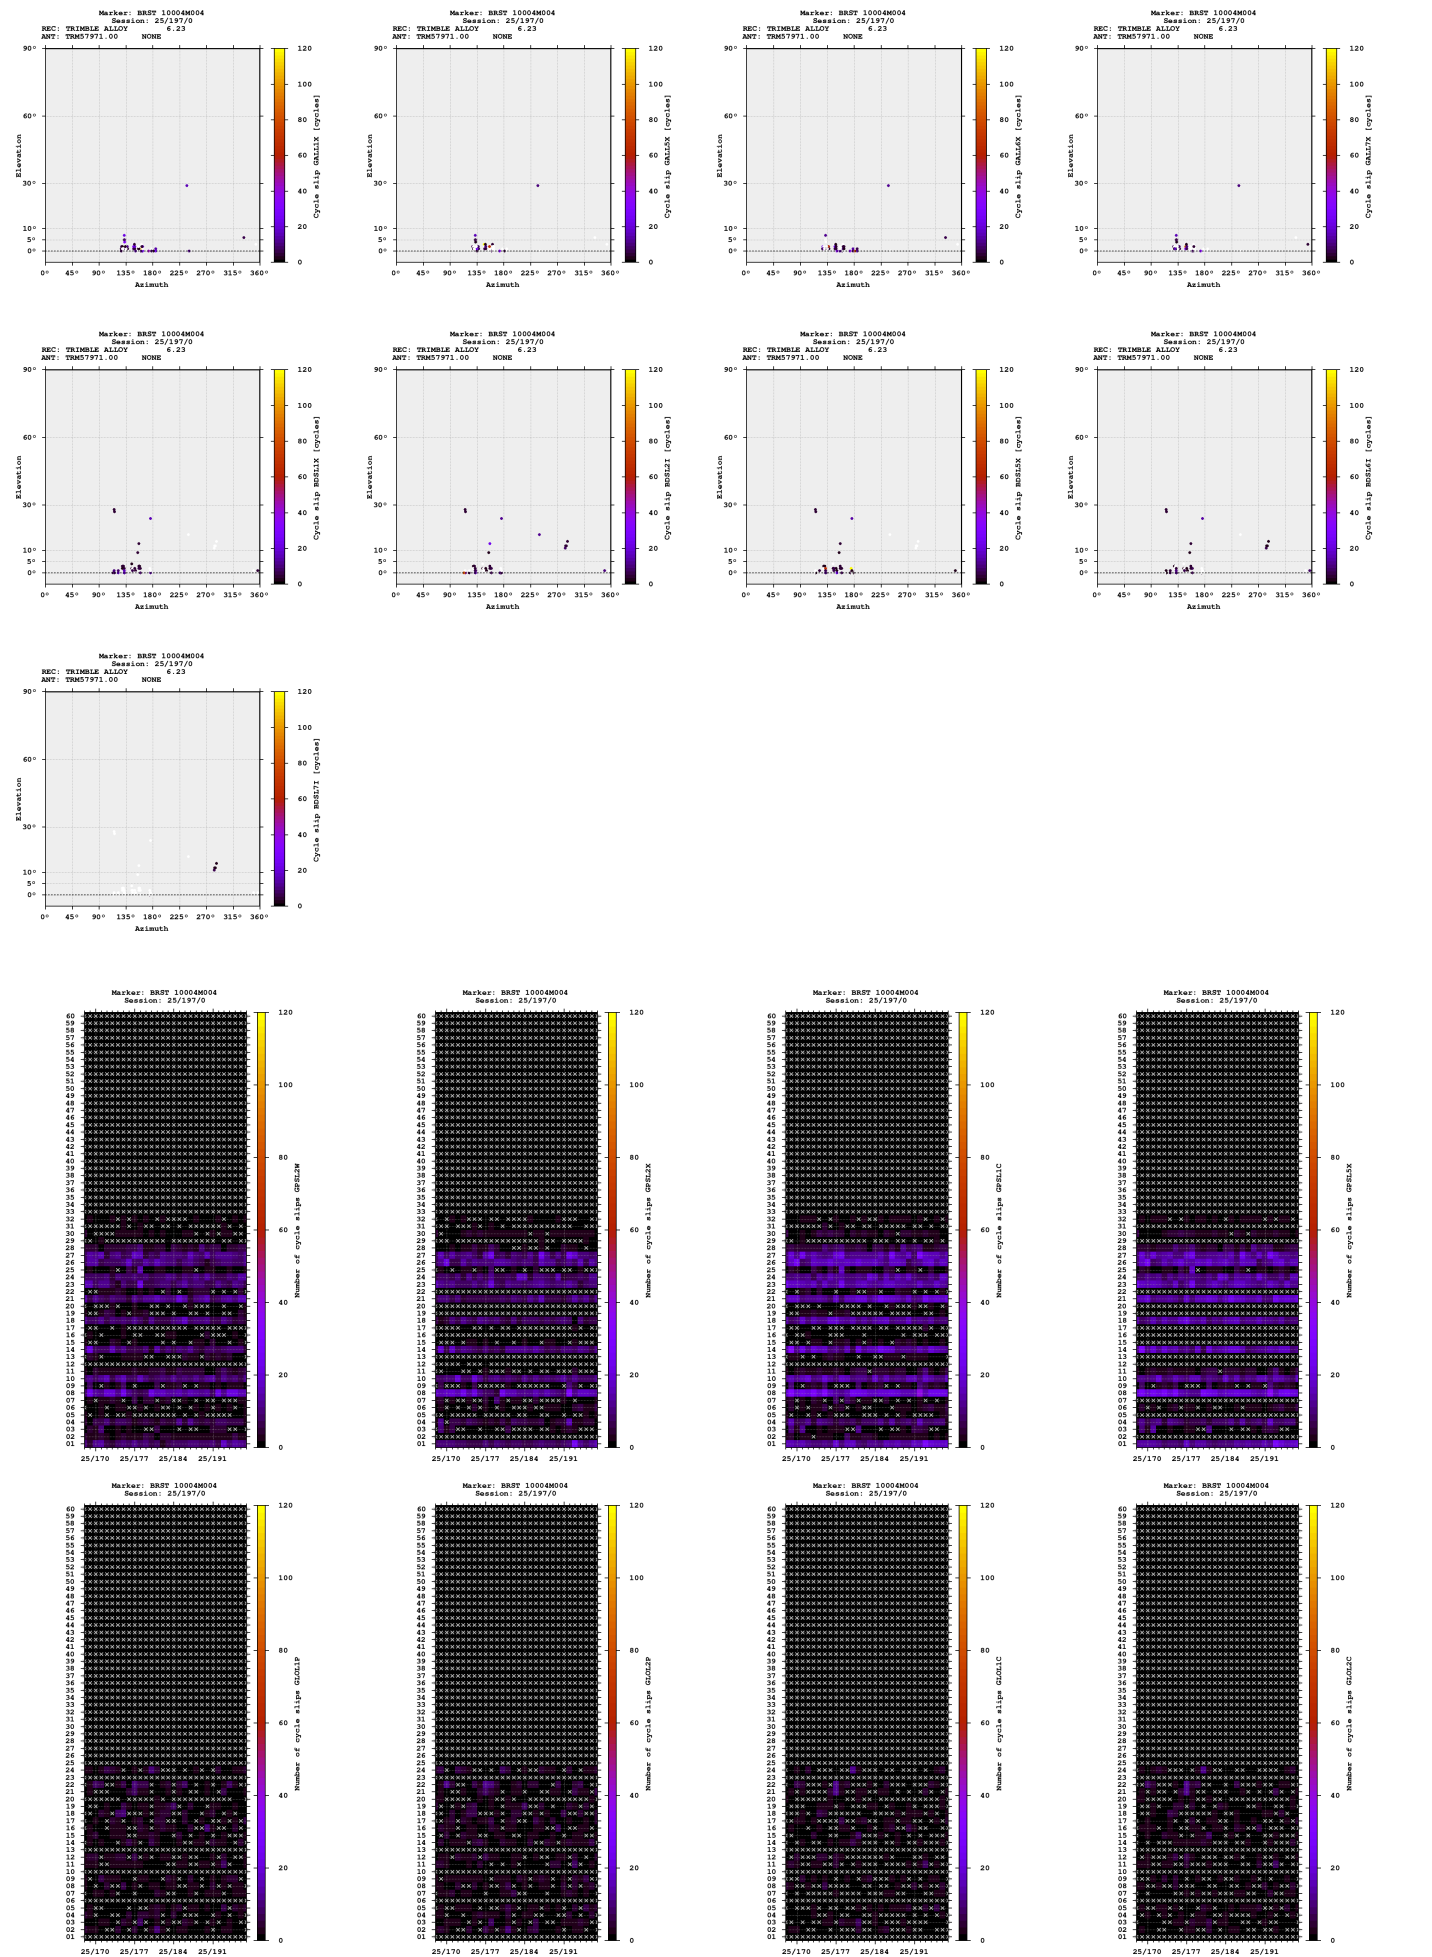


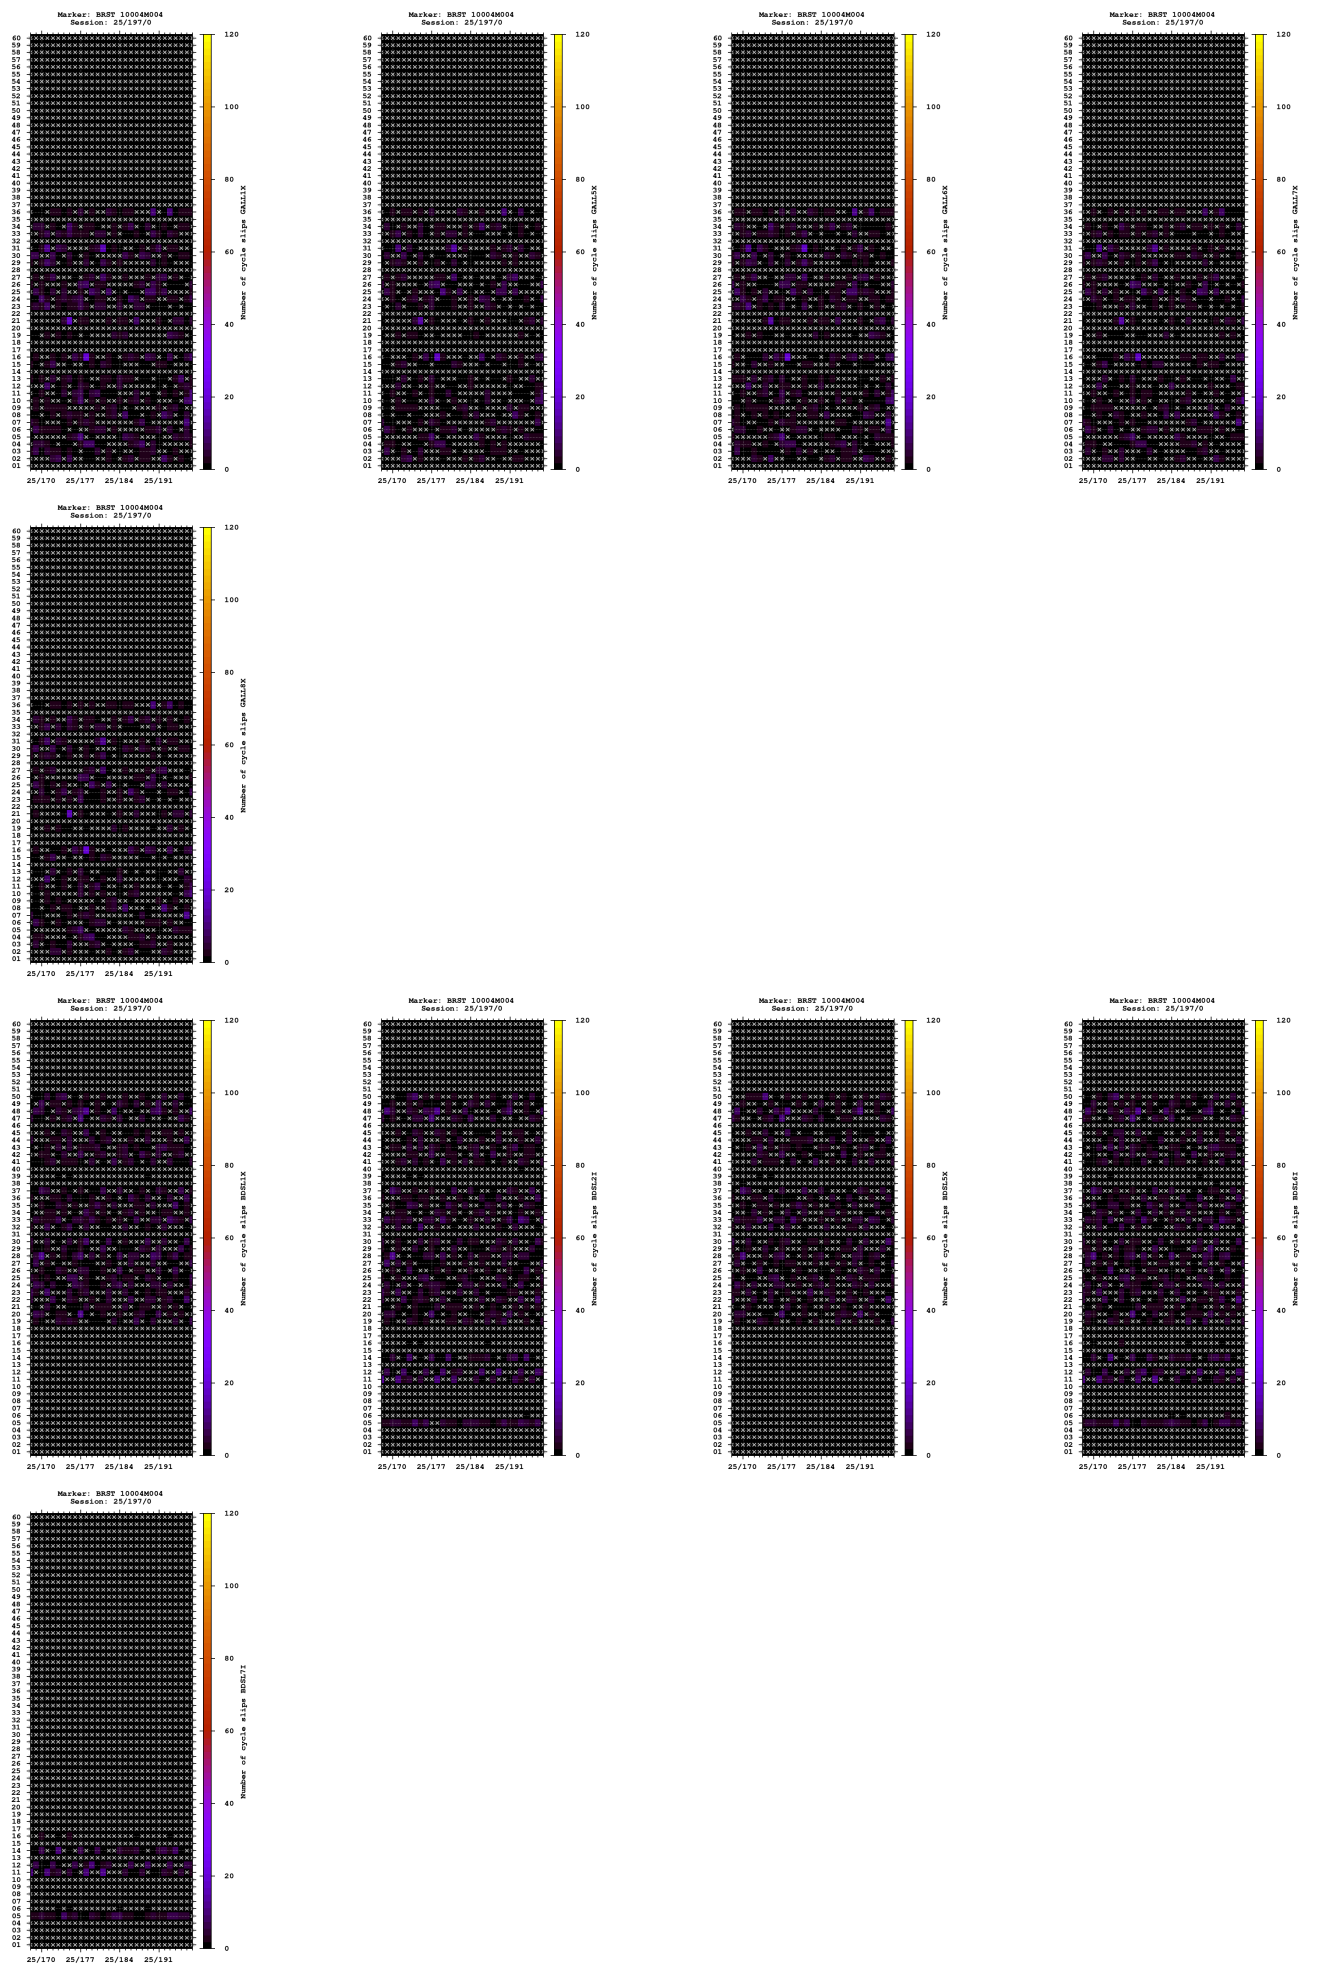


Multipath







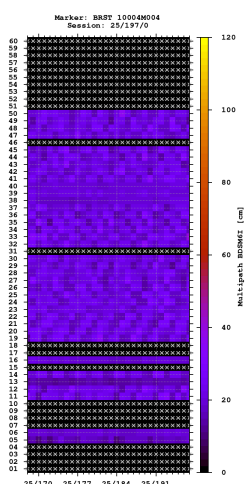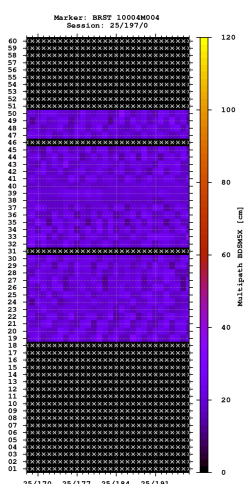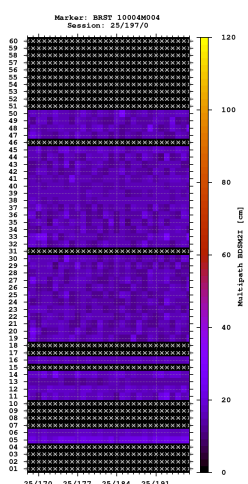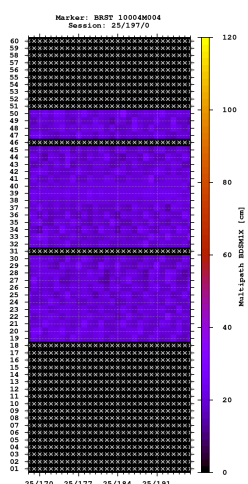

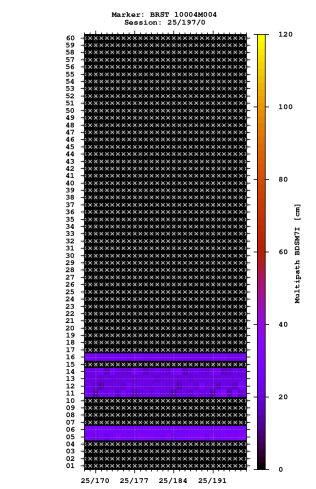




- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

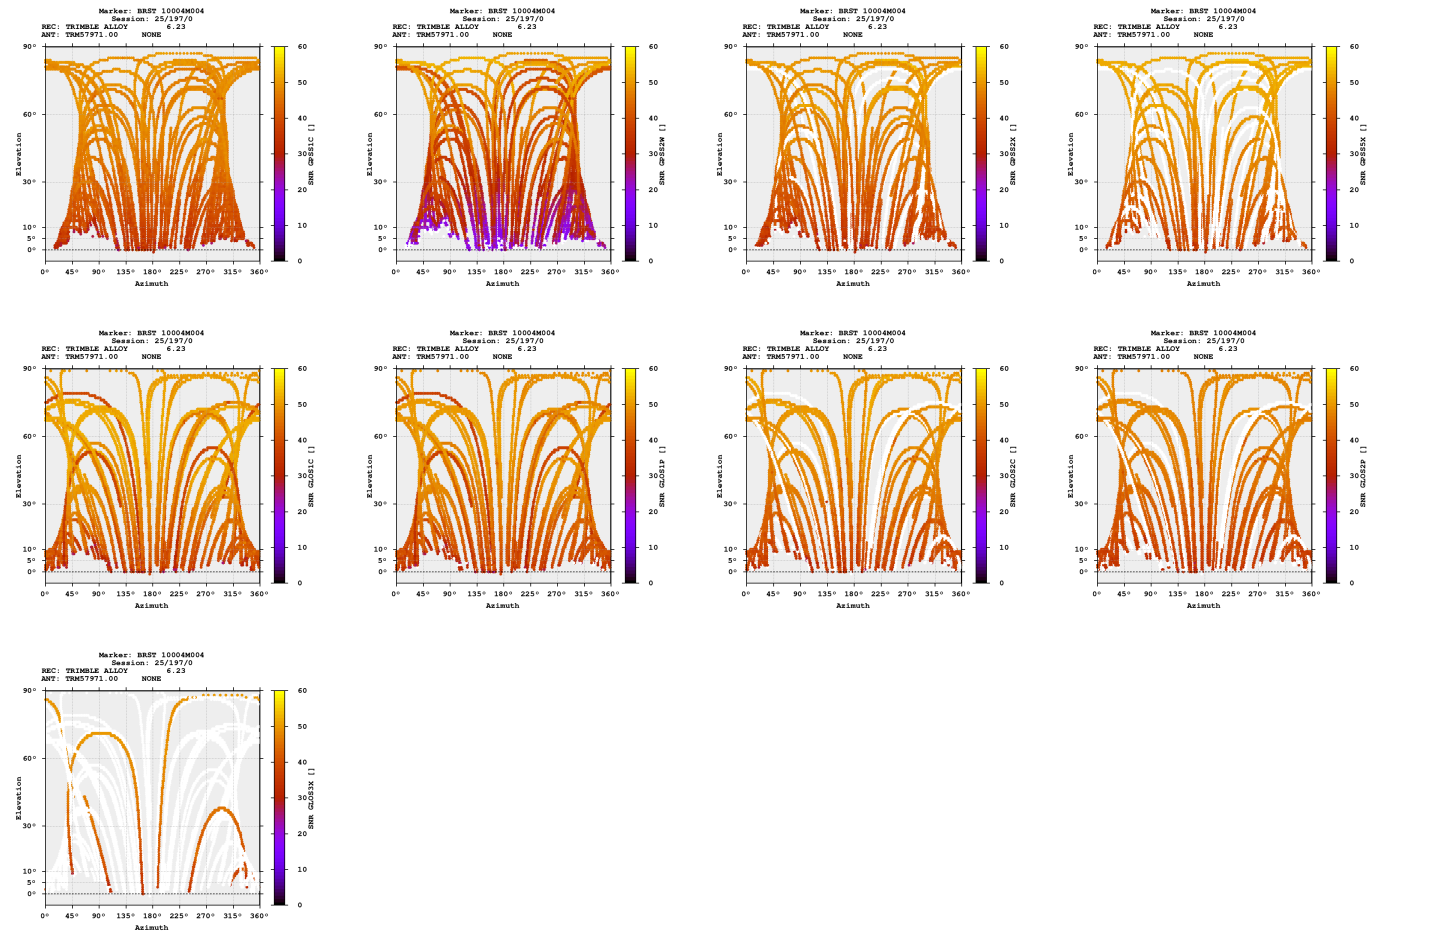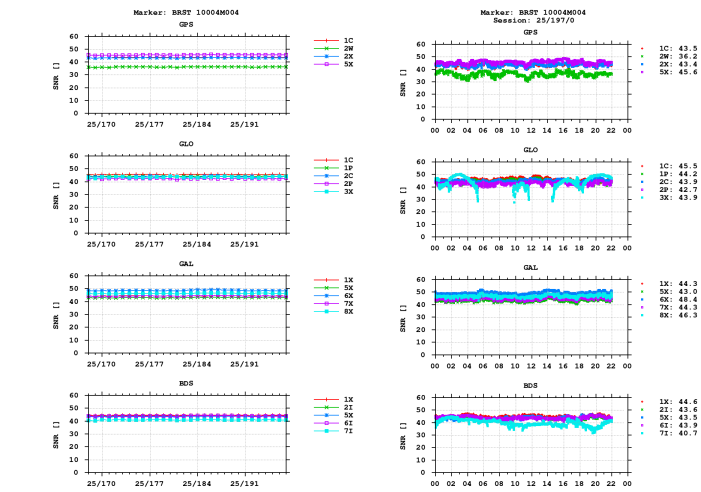



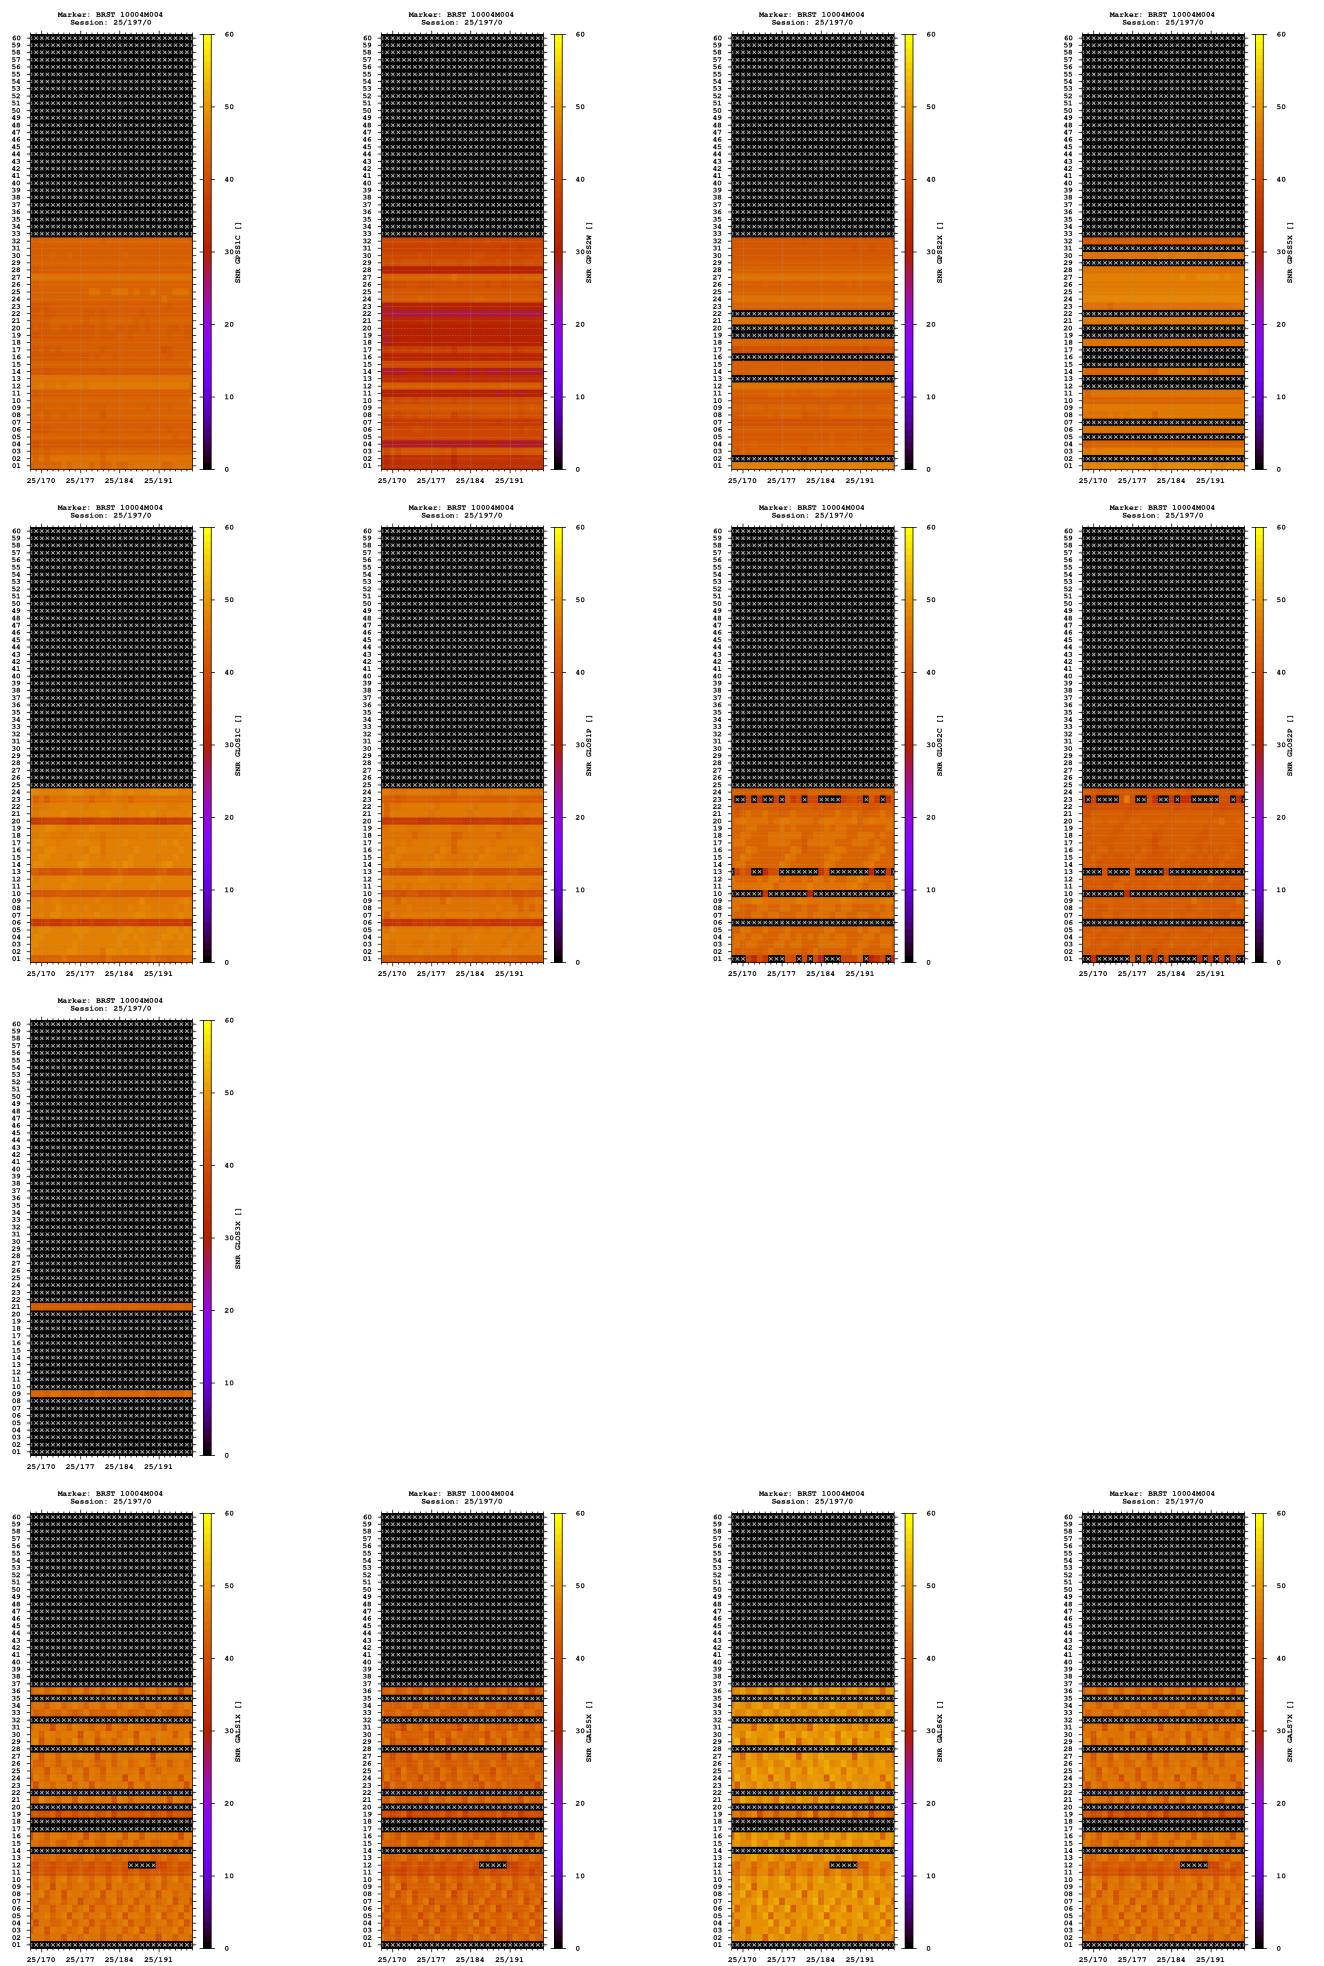

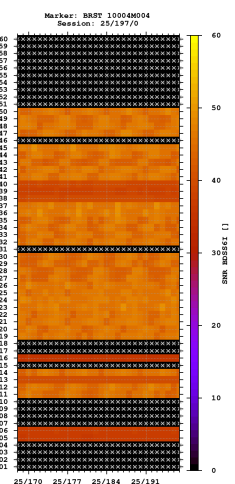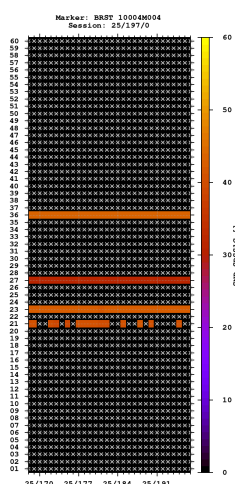


2025-07-16 00:00:00 GPS 4231162.7815 -332746.4409 4745131.7090 48.380497067 355.503408823 66.5388

2025-07-16 00:00:00 GLO 4231162.2879 -332746.7728 4745130.0208 48.380490116 355.503403834 64.9672

2025-07-16 00:00:00 GAL 4231162.7597 -332746.3574 4745131.4237 48.380495554 355.503409924 66.3067

2025-07-16 00:00:00 BDS 4231162.7211 -332746.2752 4745132.1099 48.380499954 355.503410989 66.7899

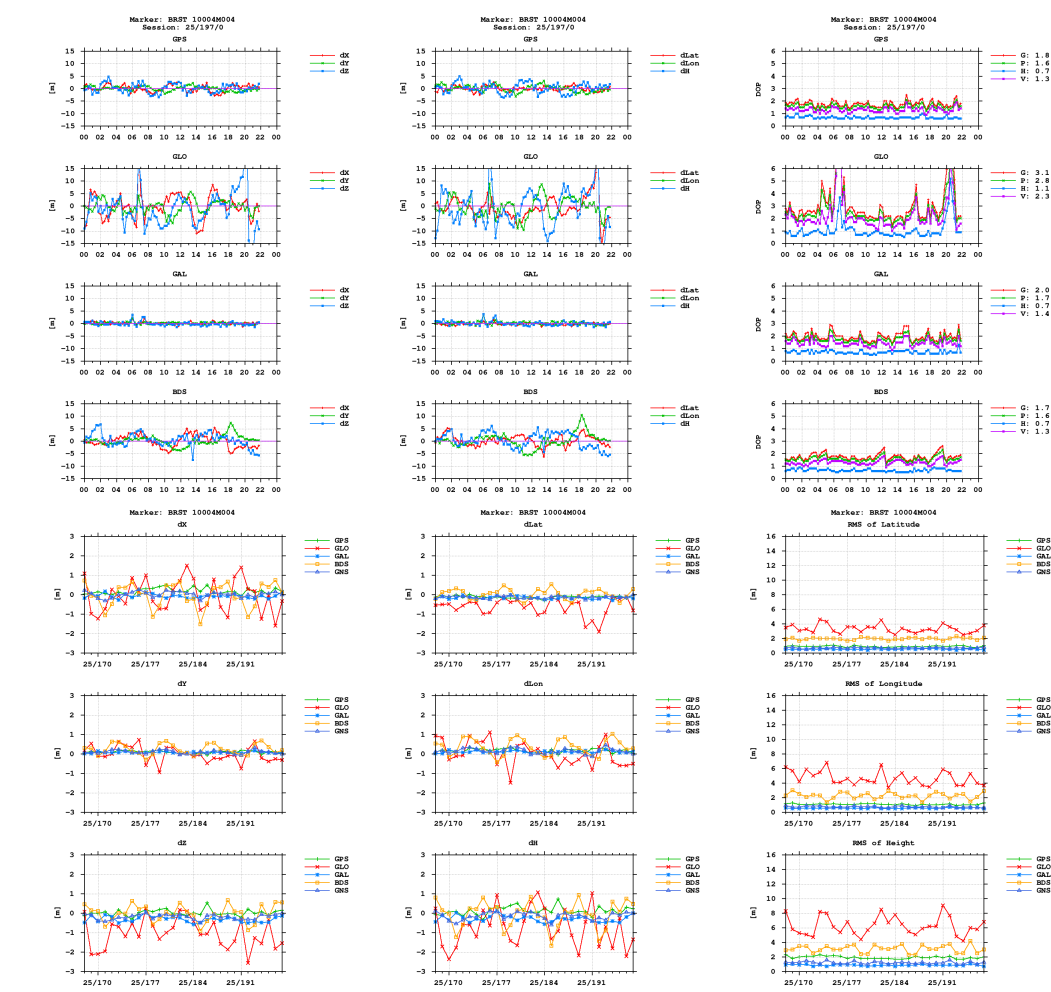

Equipment

2025-06-17 00:00:00 TRIMBLE ALLOY 6.23 5818R400 TRIMBLE AL

Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)