

GNSS observation file monitoring for BSCN

Last RINEX file: BSCN1970.25D.Z


RINEX version: 3.04

Marker: BSCN 10028M007

Receiver: 2090104 LEICA GR50 4.80

Antenna: 1441023017 TRM57971.00 NONE


Epochs

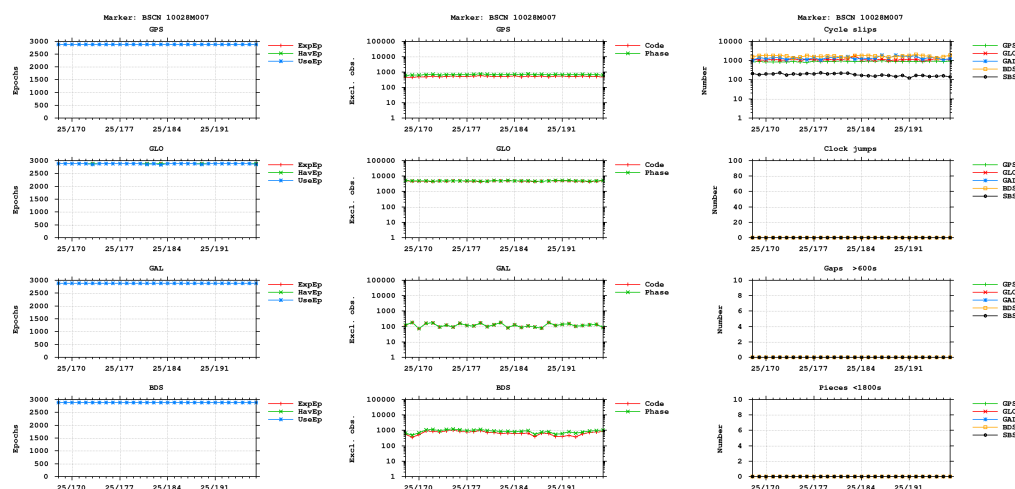


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

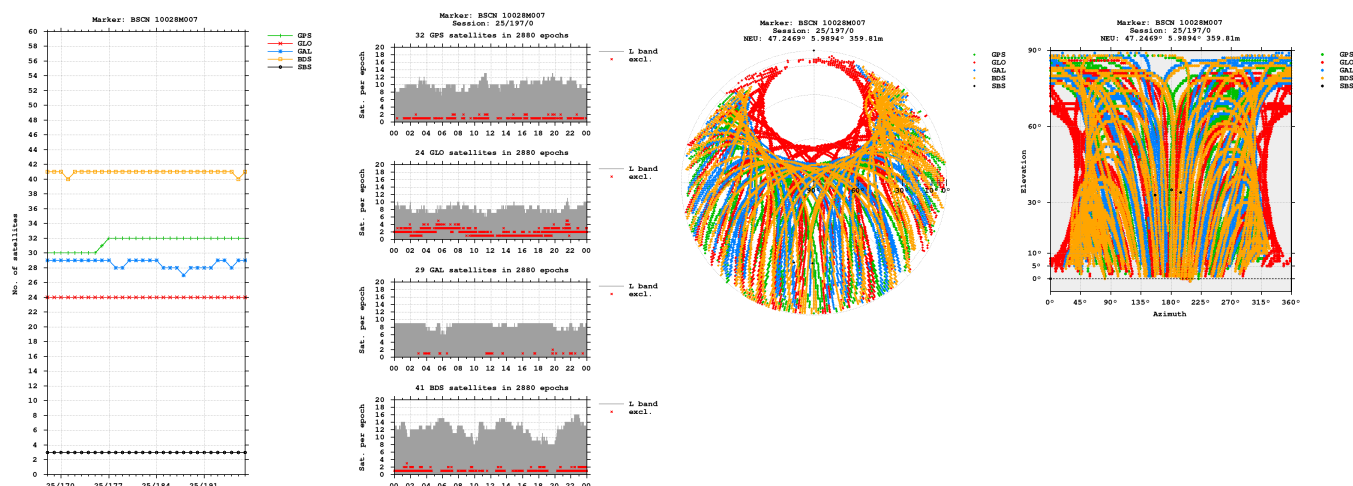


Bands

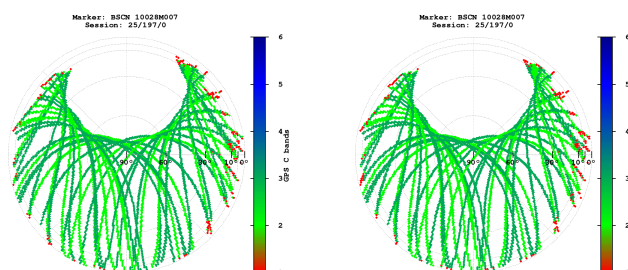


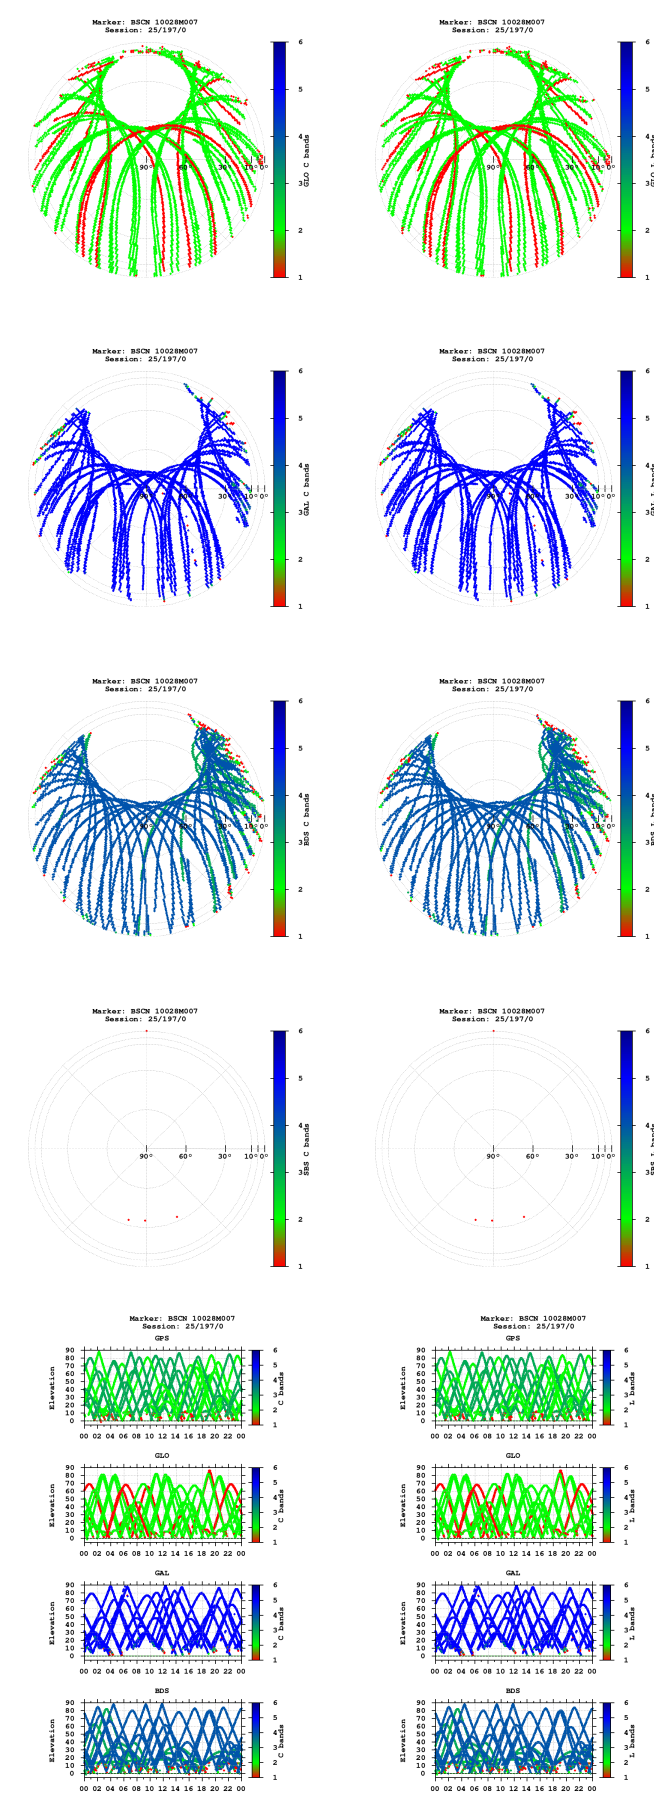

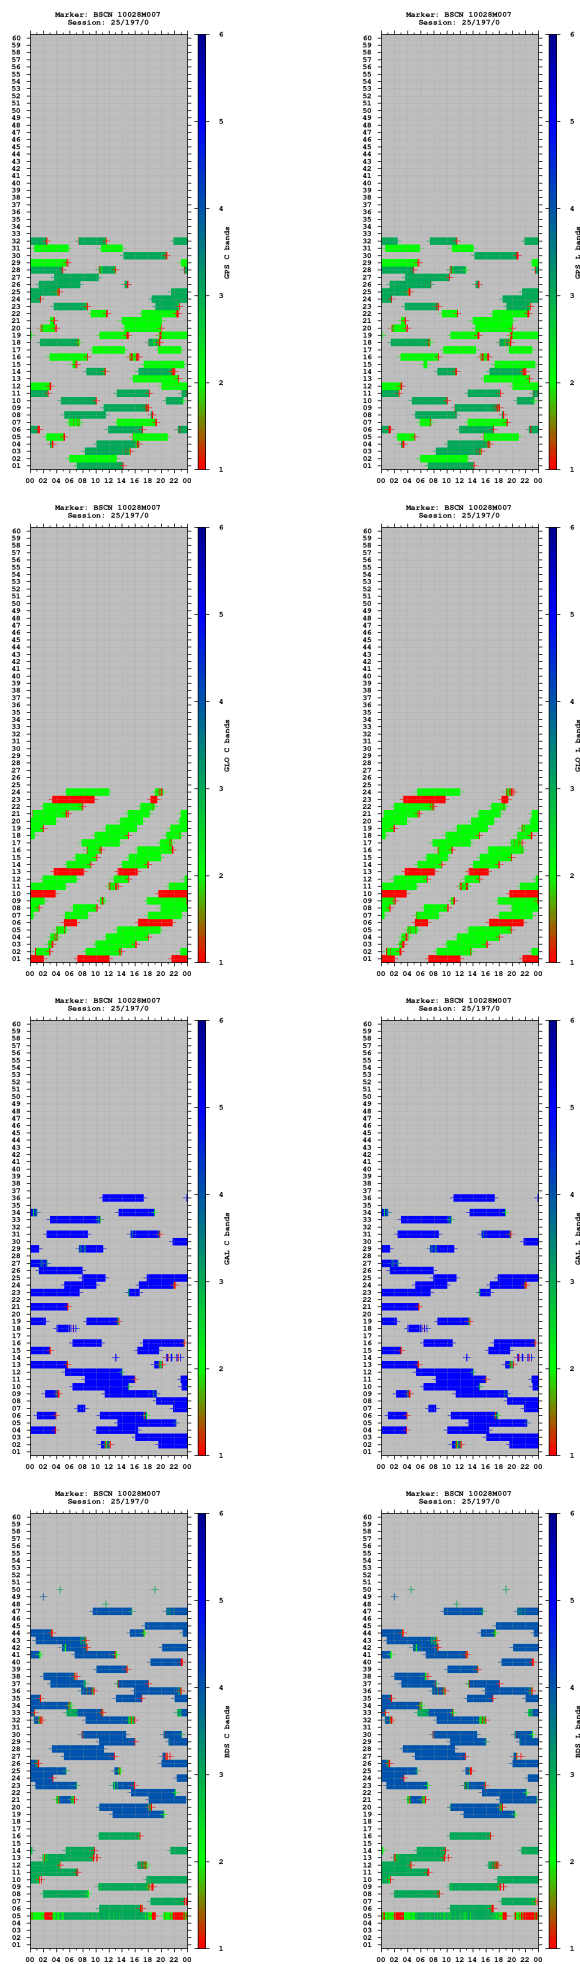


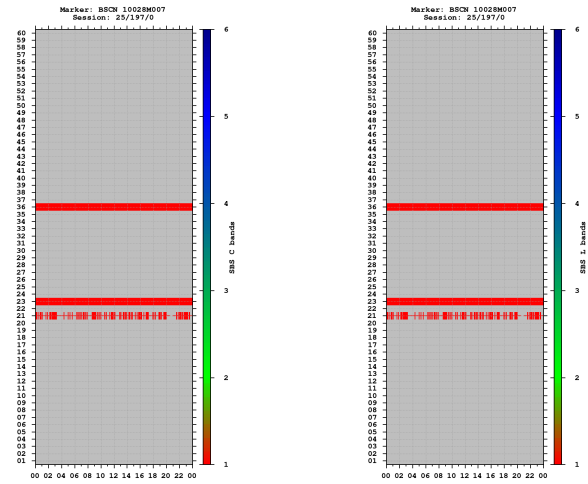



Observations

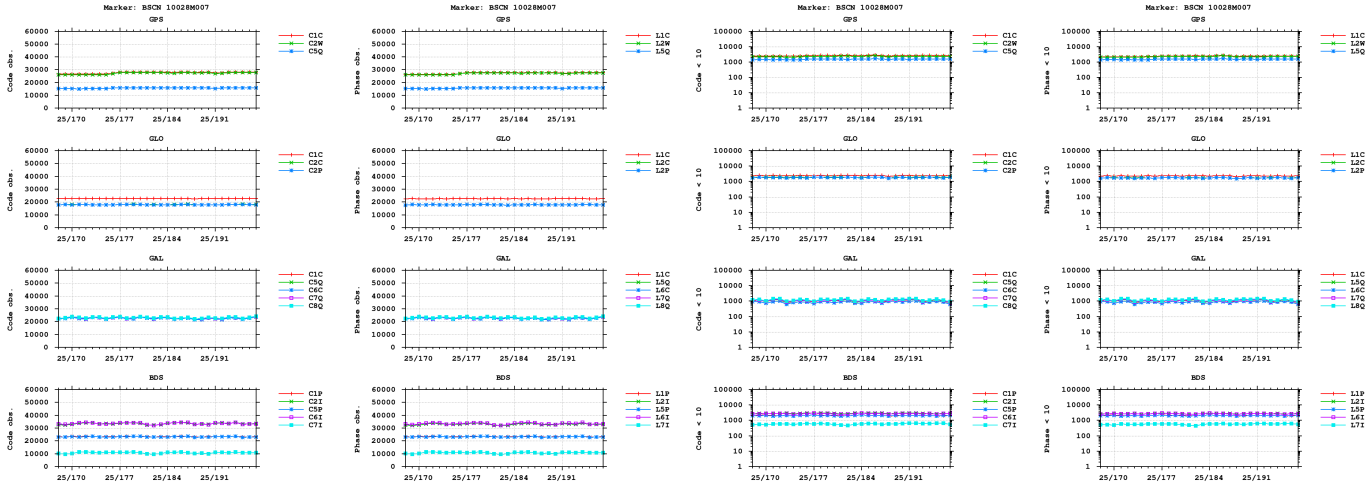


Cycle slips

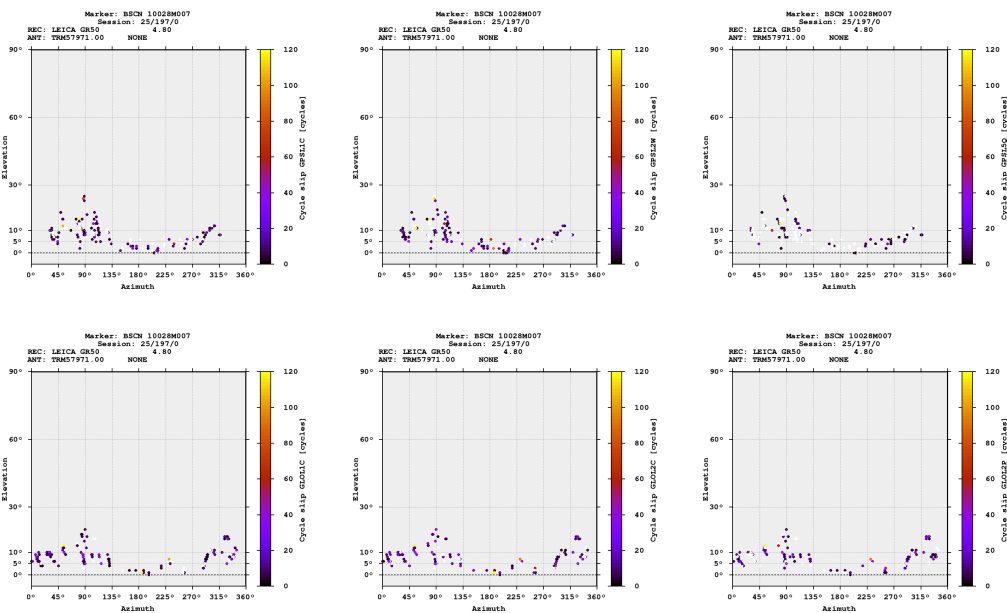


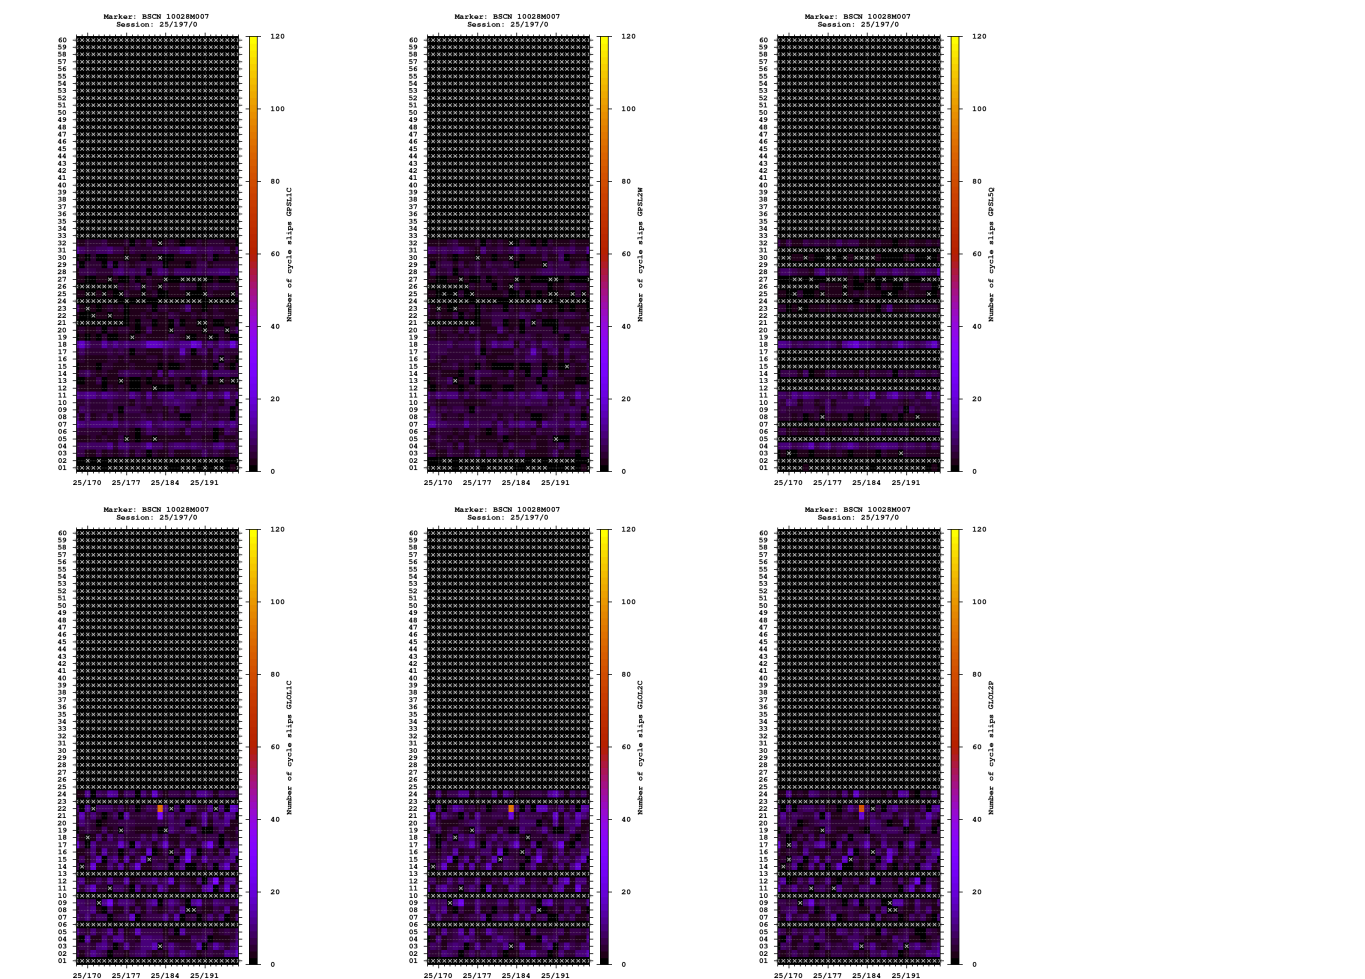


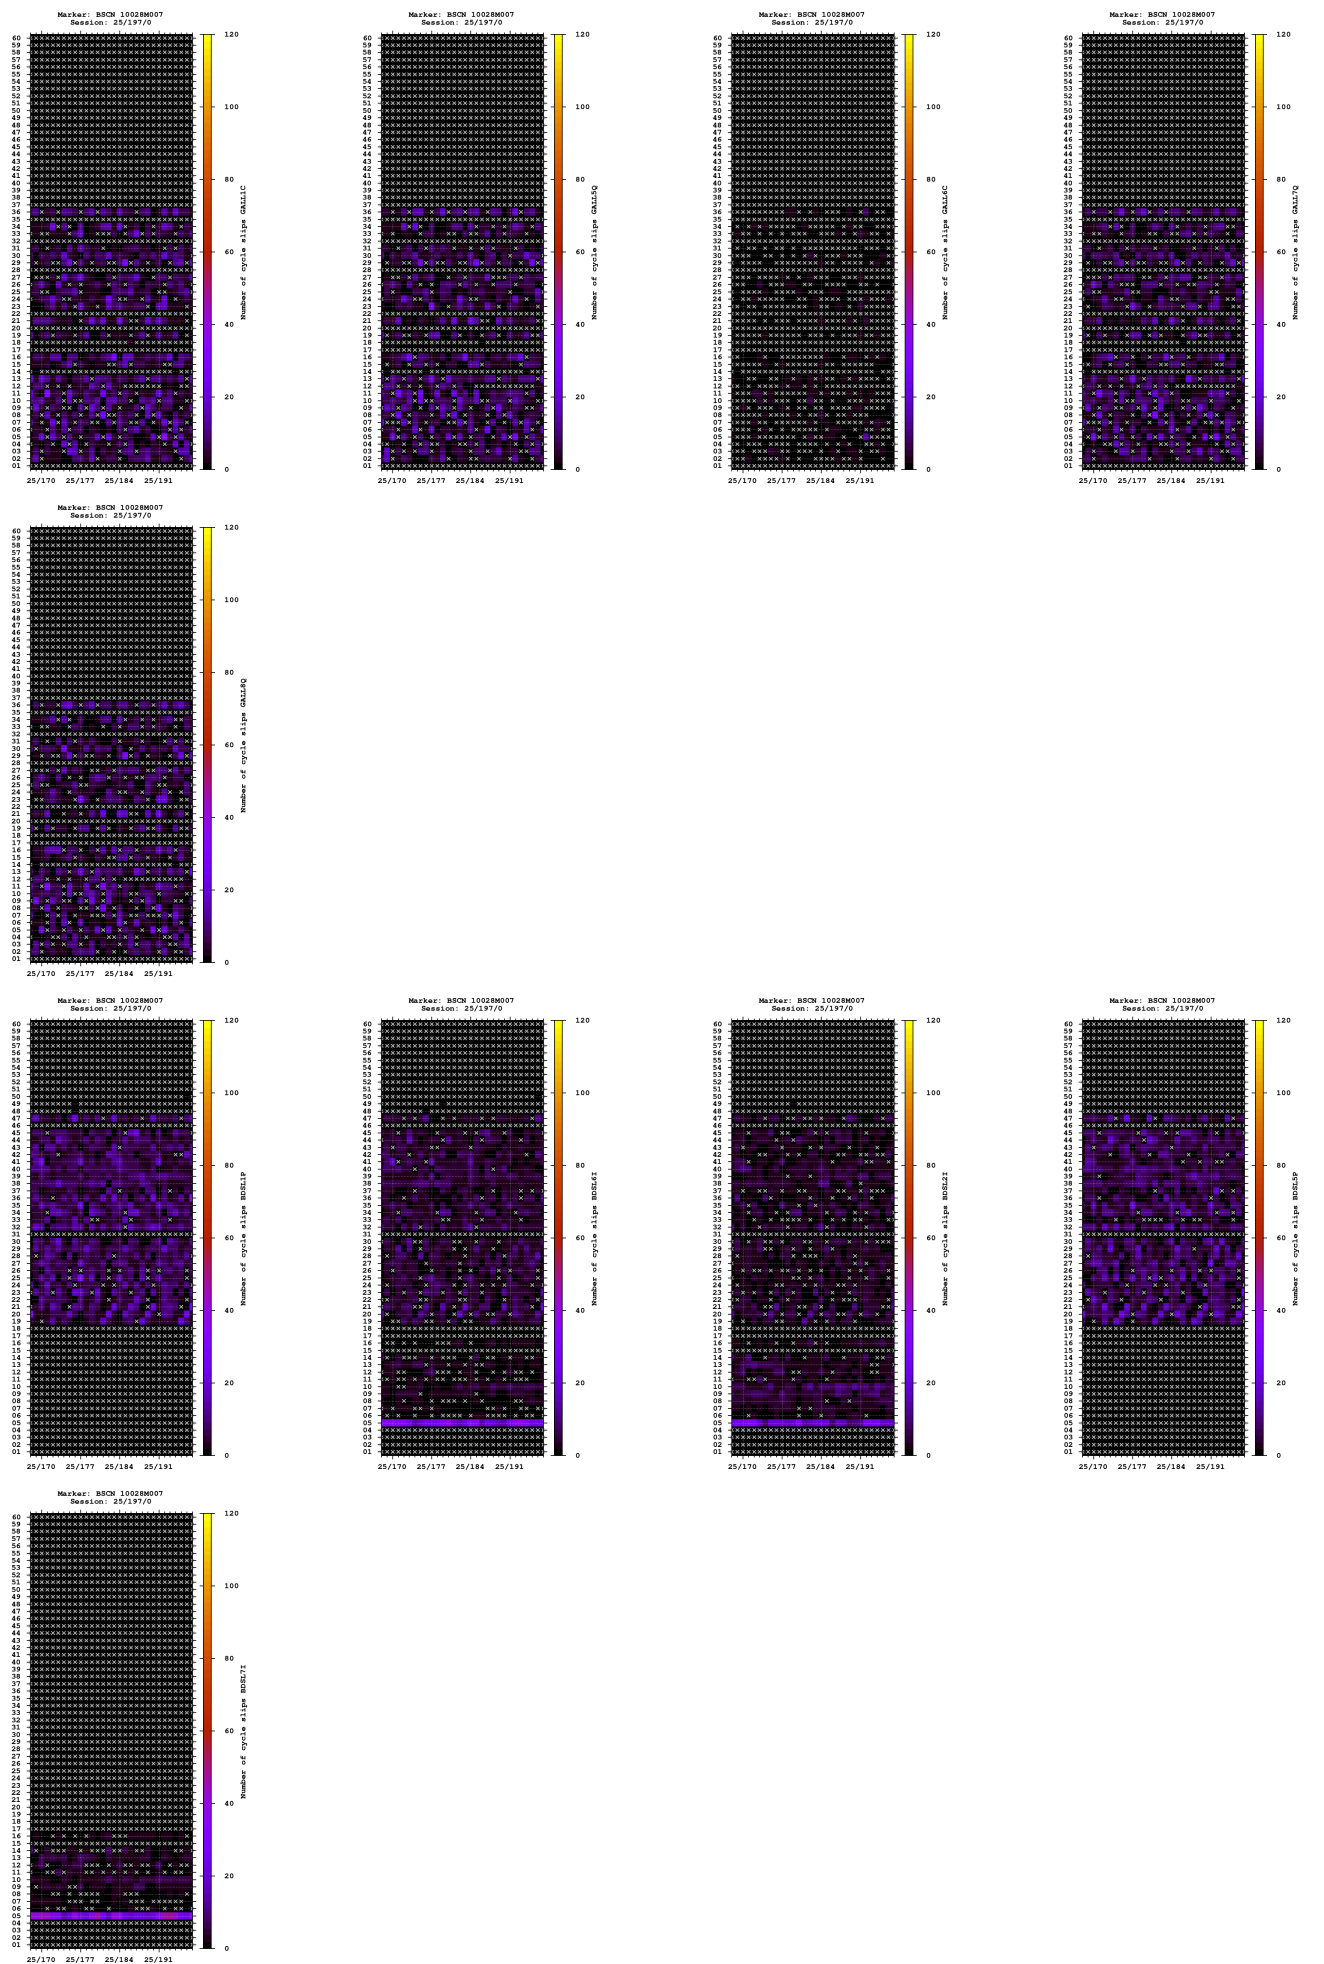

Multipath

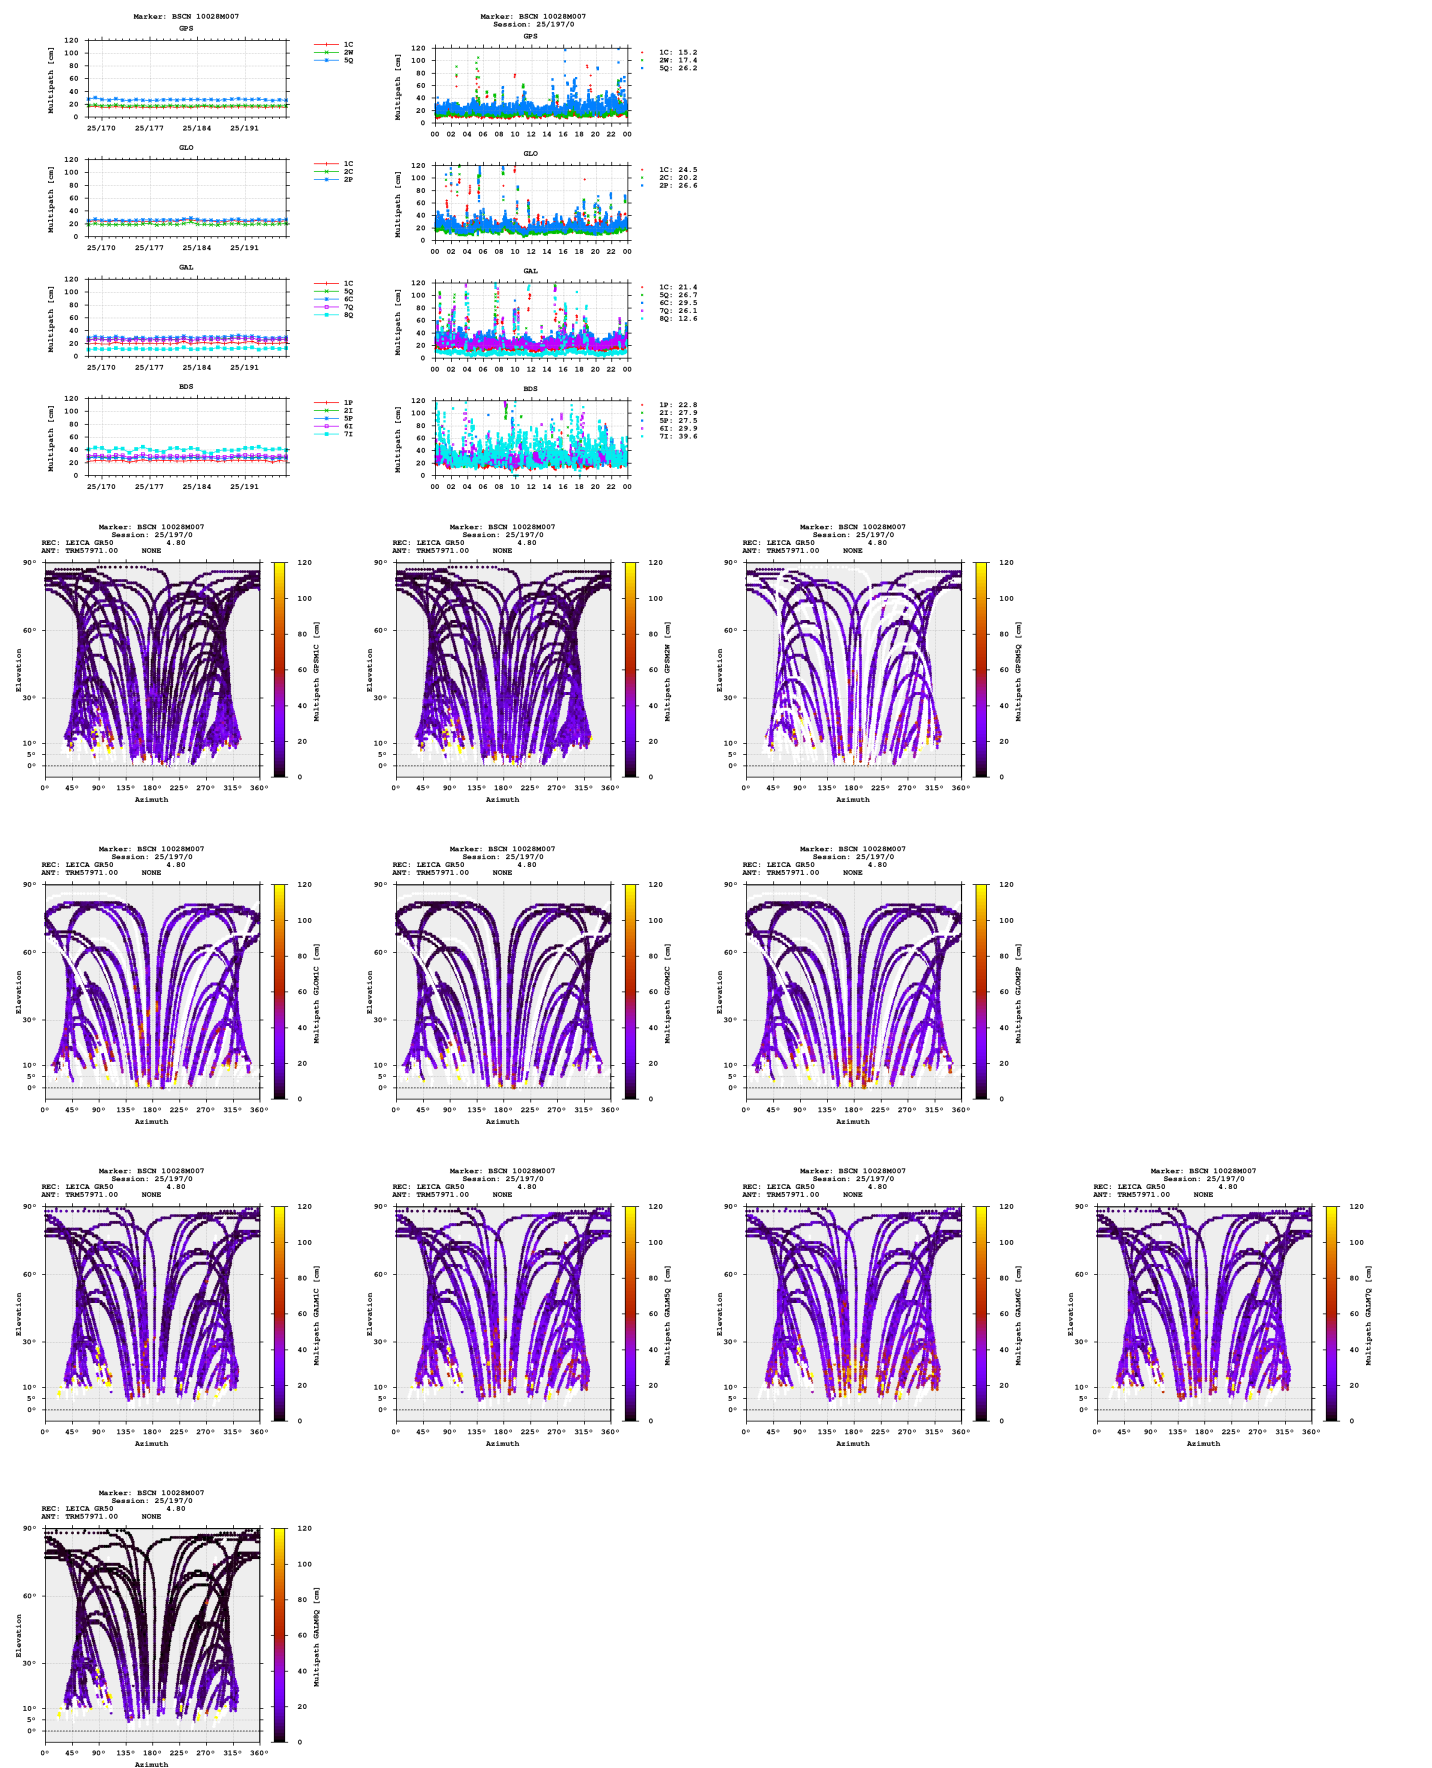

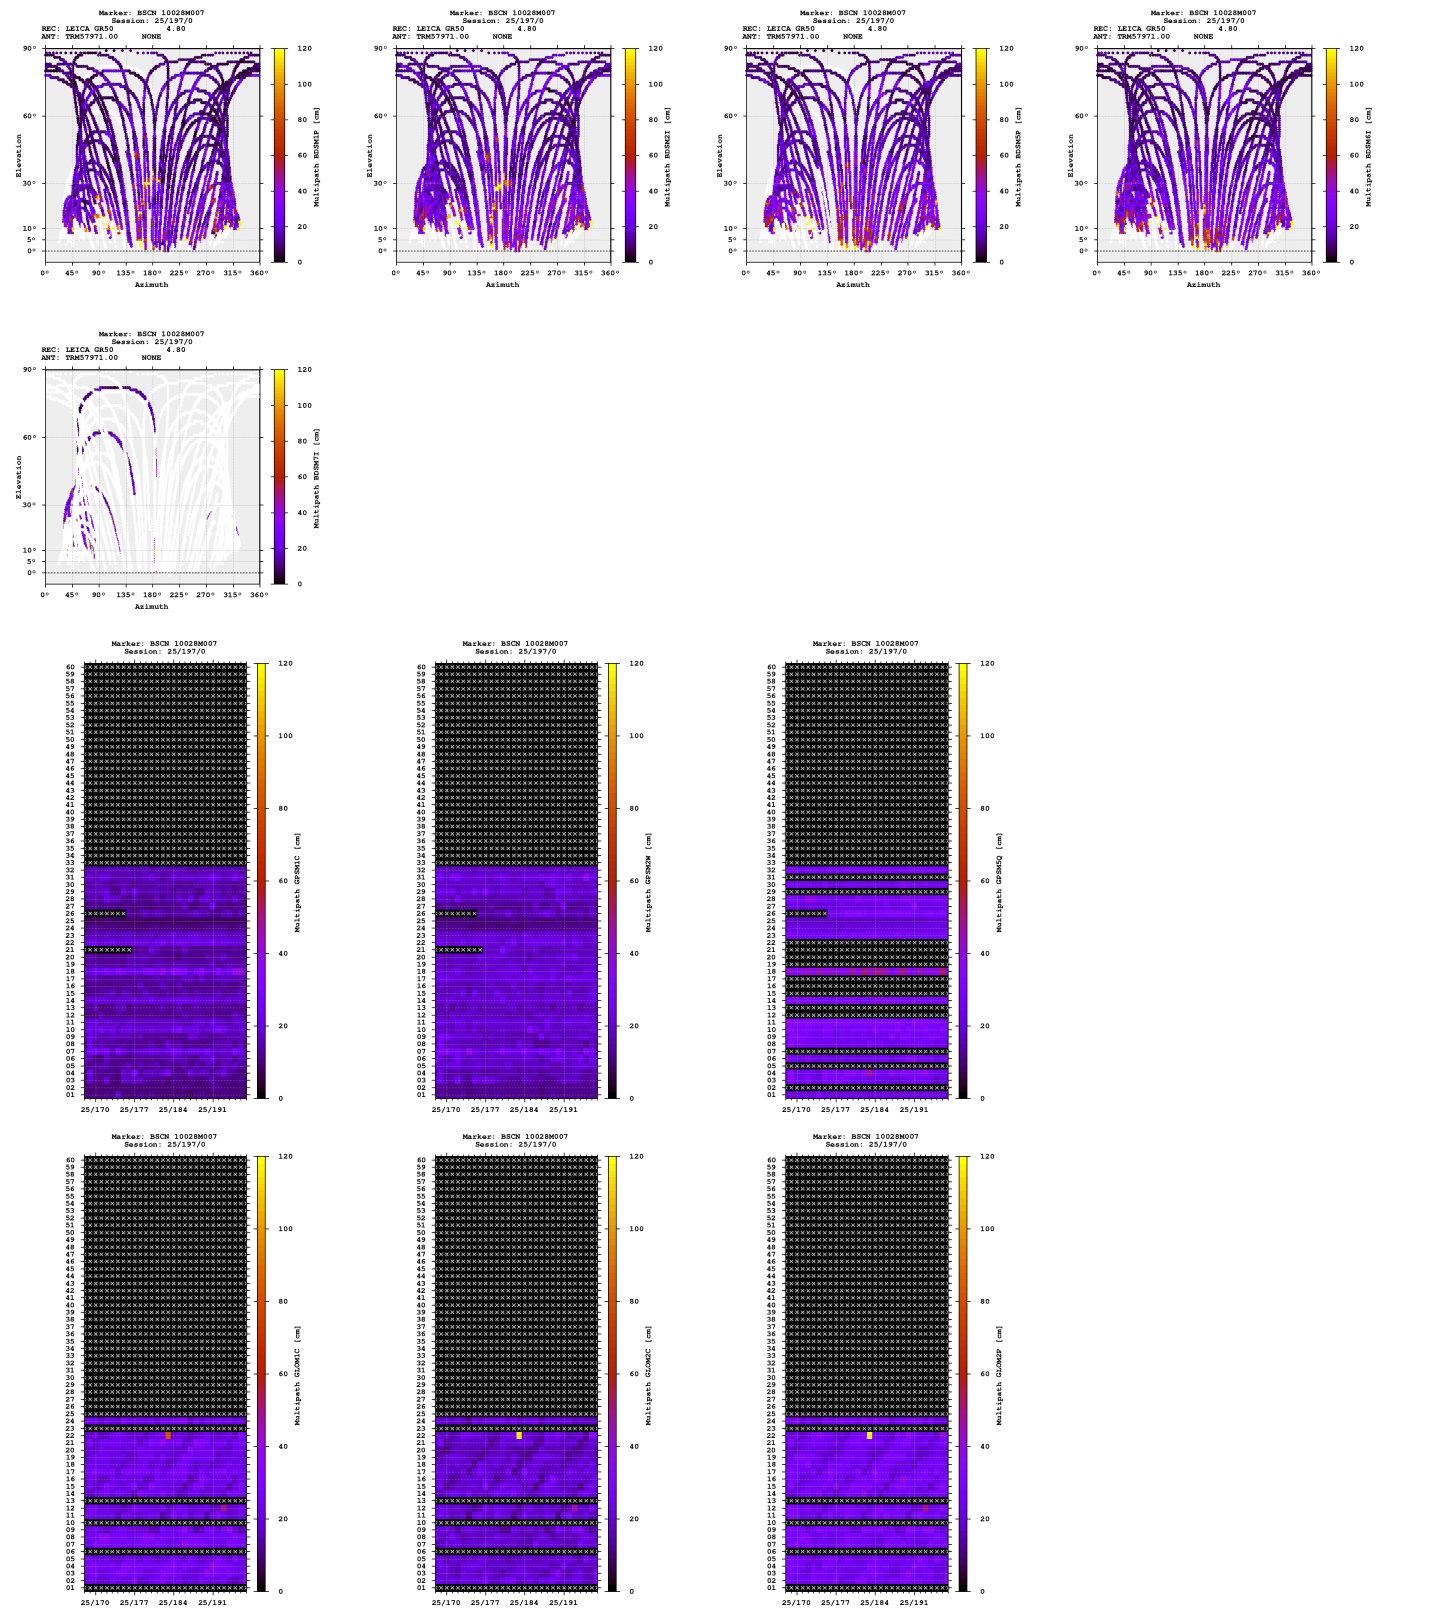


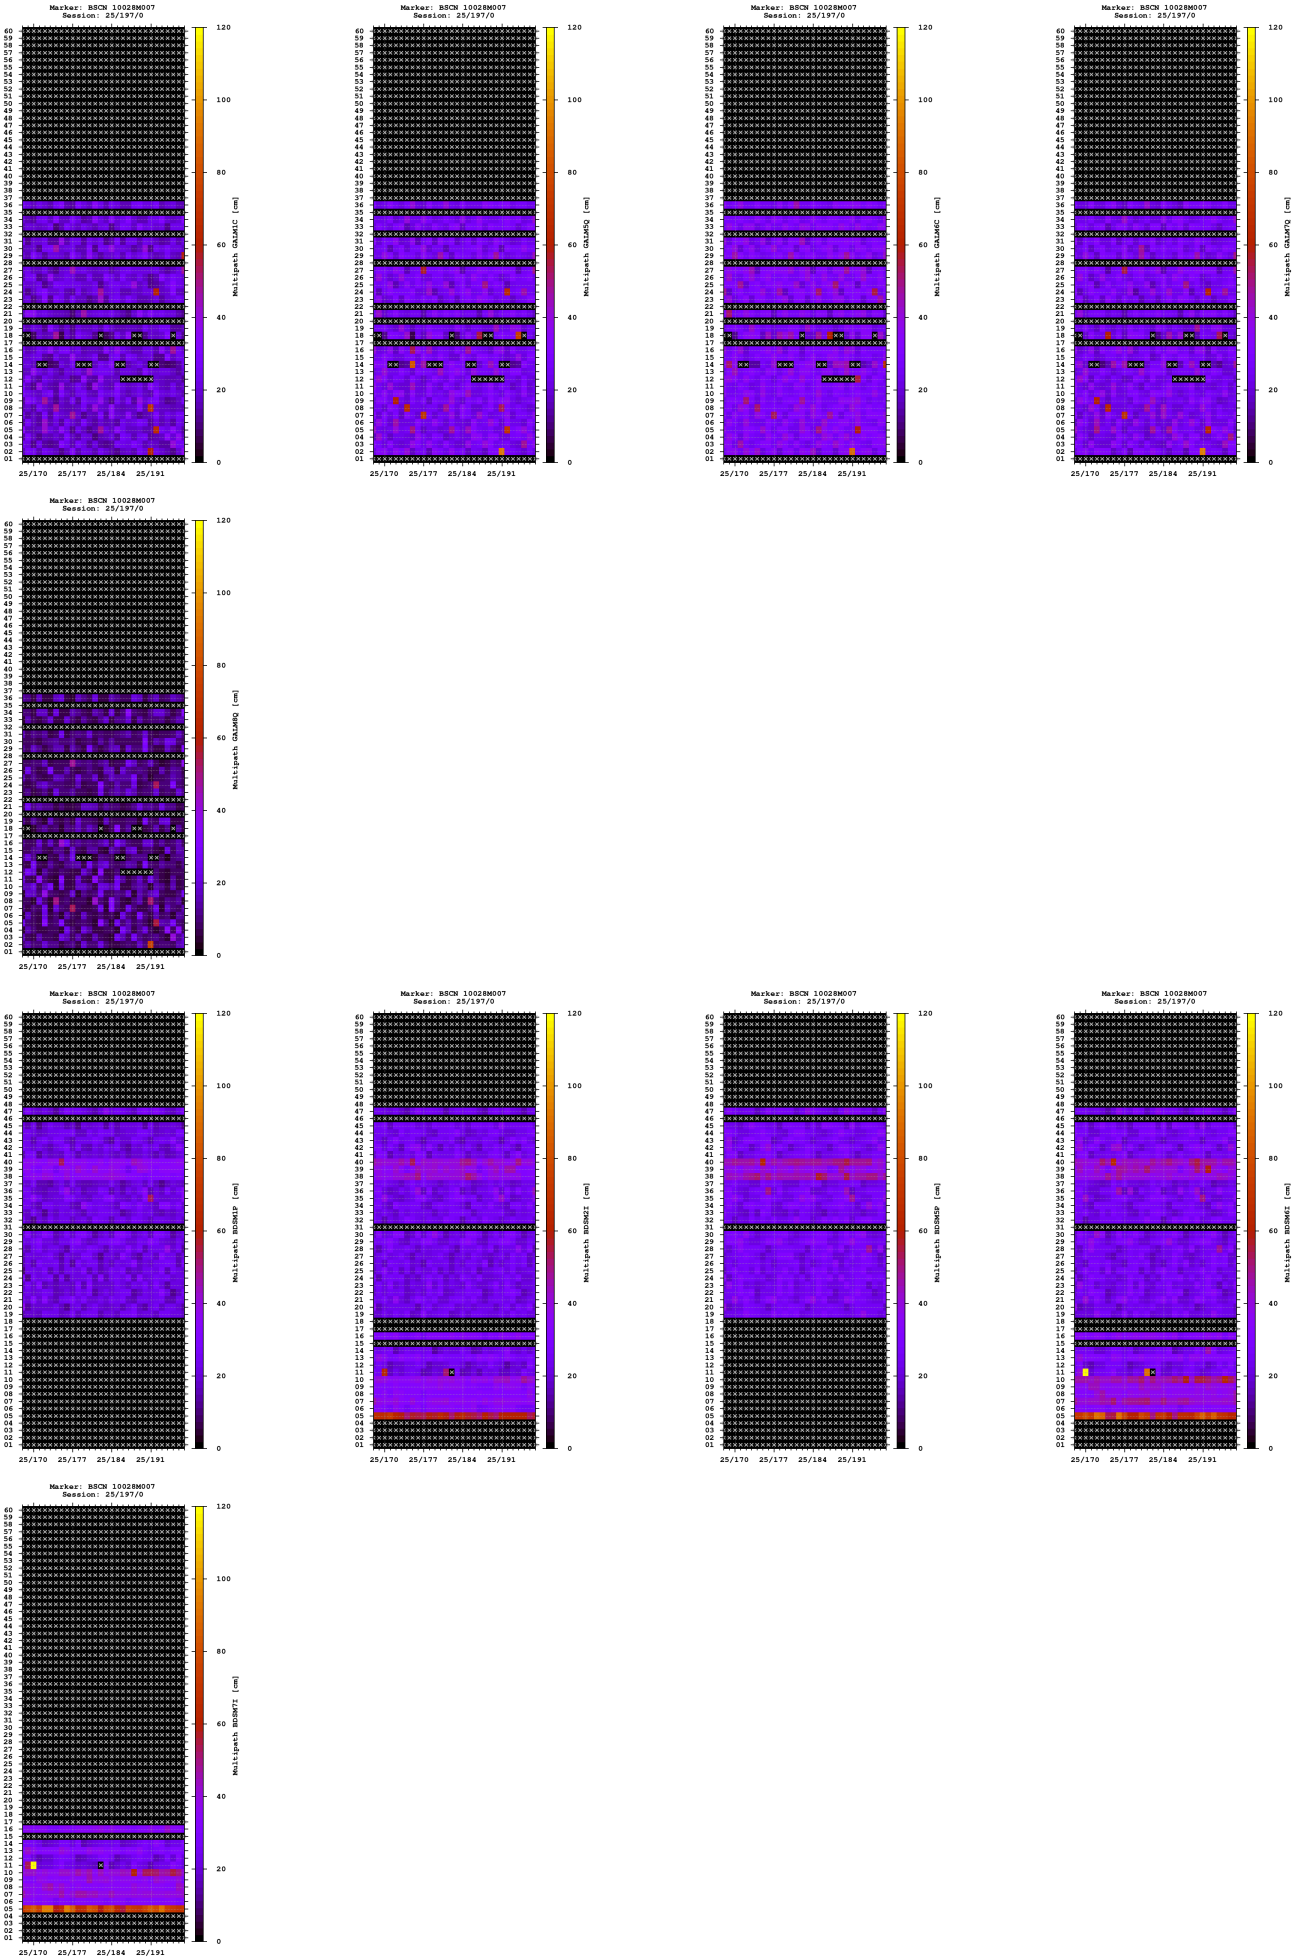



- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio



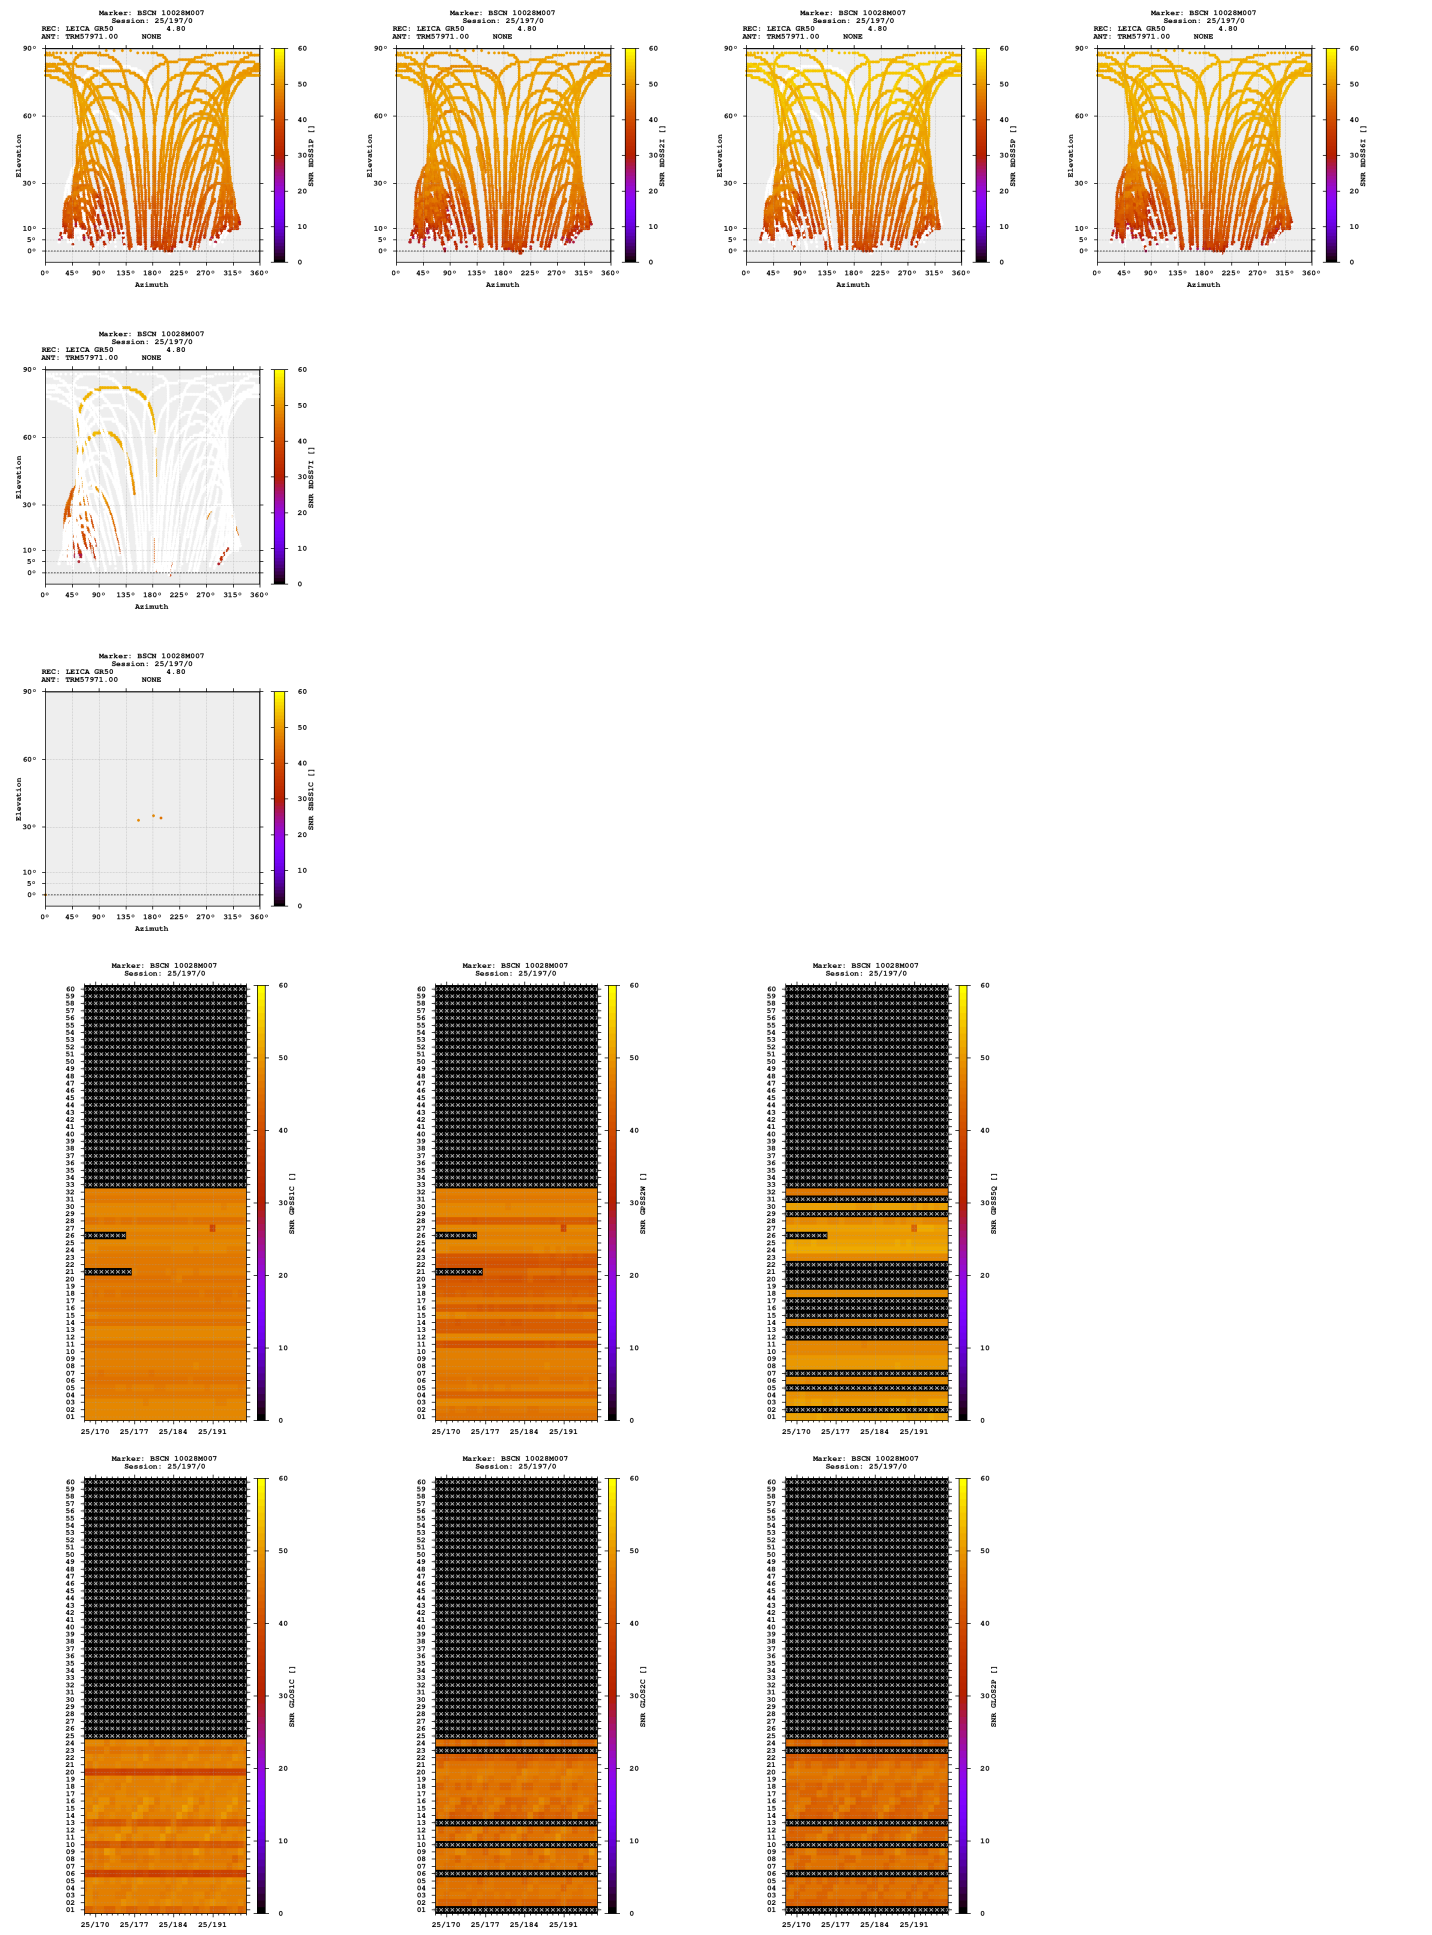


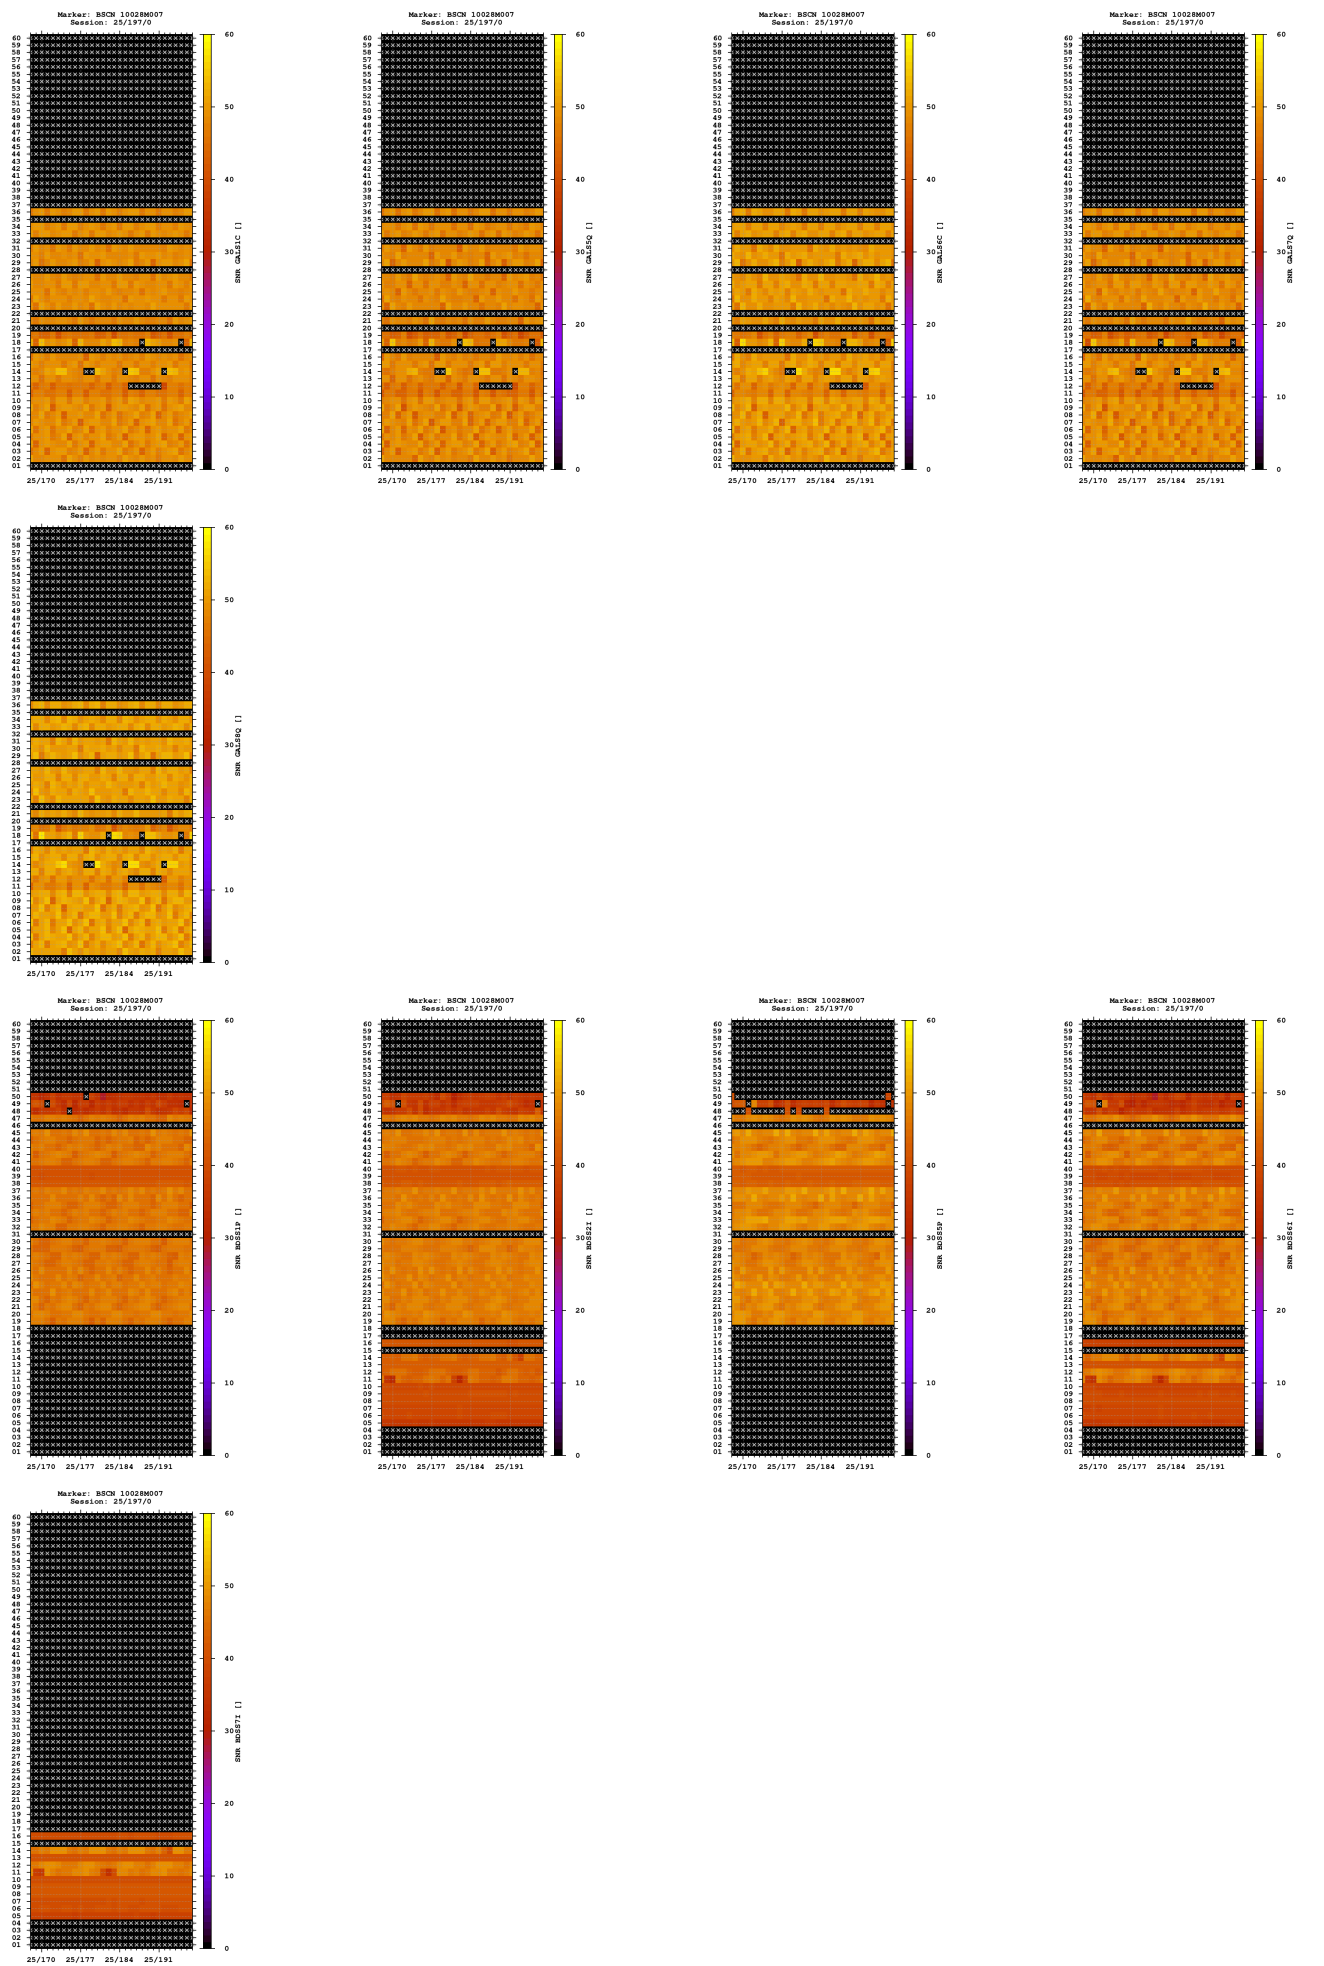

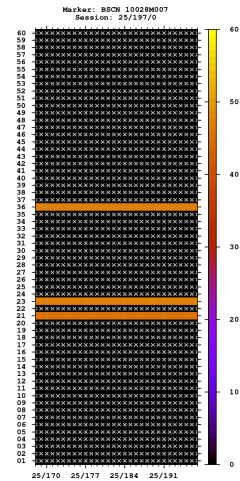

Estimates

2025-07-16 00:00:00	GPS	4314138.9507	452626.6514	4660704.4298	47.246885498	5.989391093	359.7252
2025-07-16 00:00:00	GLO	4314139.1694	452625.8502	4660703.1851	47.246876985	5.989380166	358.8428
2025-07-16 00:00:00	GAL	4314139.1982	452626.8198	4660704.4775	47.246884019	5.989392864	359.8799
2025-07-16 00:00:00	BDS	4314139.1410	452626.8277	4660705.2183	47.246888912	5.989393045	360.3858

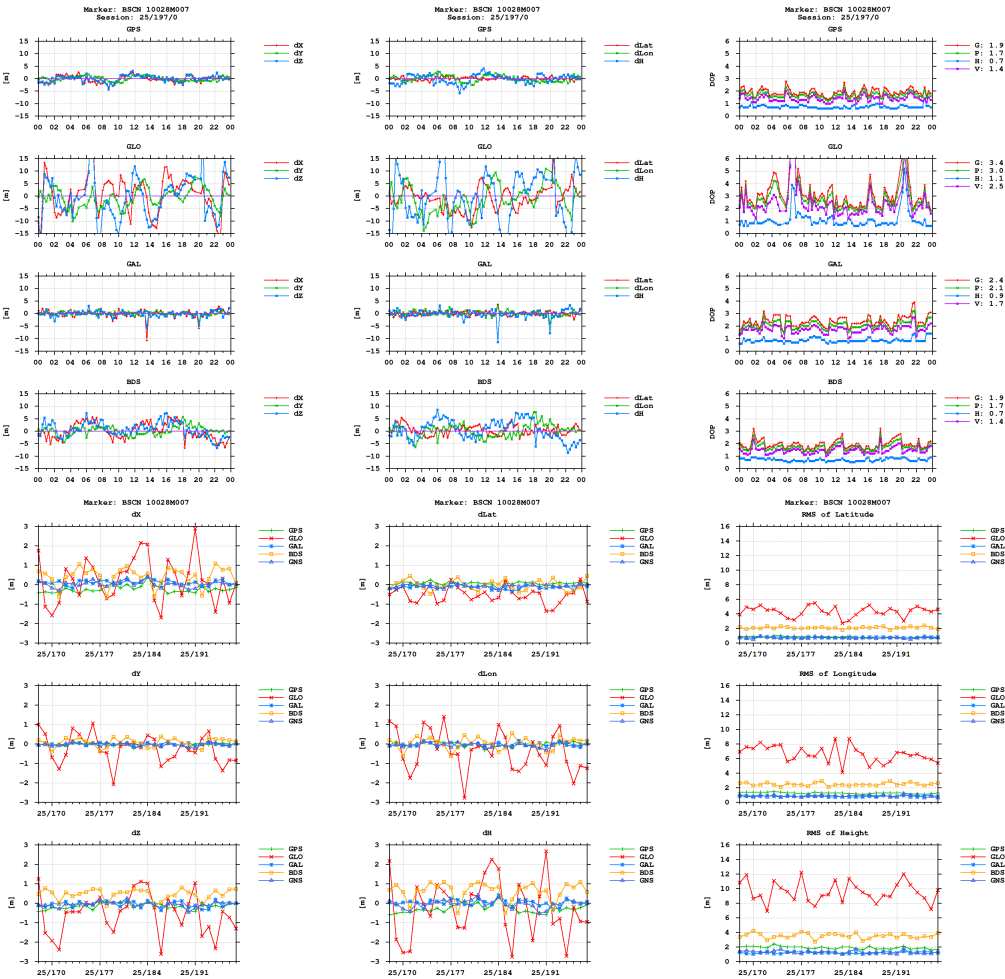

Equipment

2025-06-17 00:00:00 LEICA GR50 4.80 2090104 LEICA GR50

Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)