

GNSS observation file monitoring for BYDG

Last RINEX file: BYDG1970.25D.Z


RINEX version: 3.04

Marker: BYDG 12224M001

Receiver: 6322R401 TRIMBLE ALLOY Nav 6.23 / Boot 5.63

Antenna: 5347361485 TRM59900.00 SCIS


Epochs

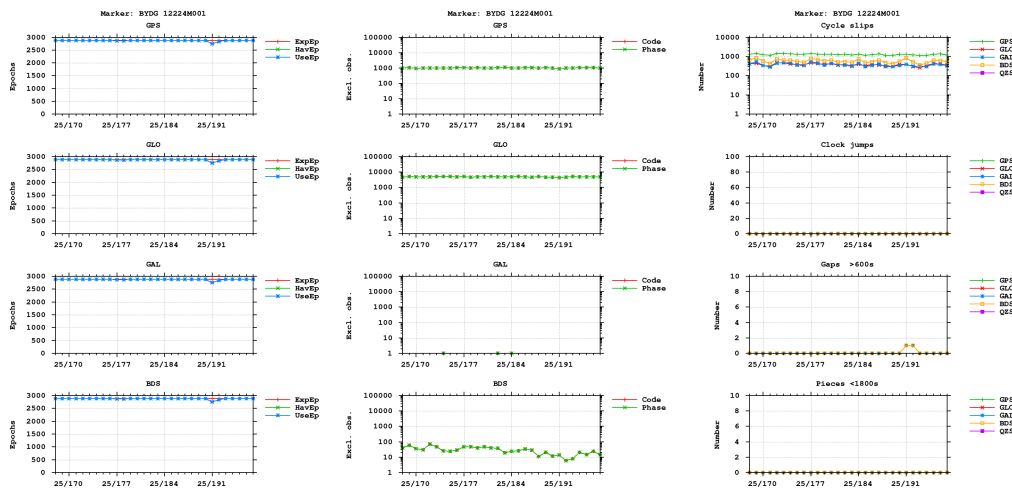


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

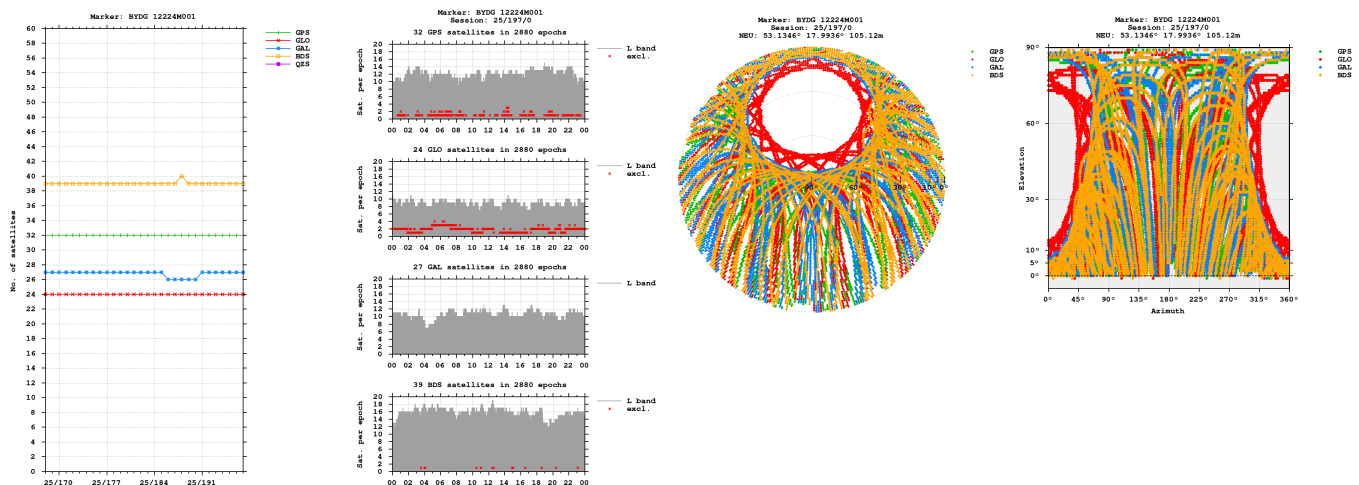


Bands

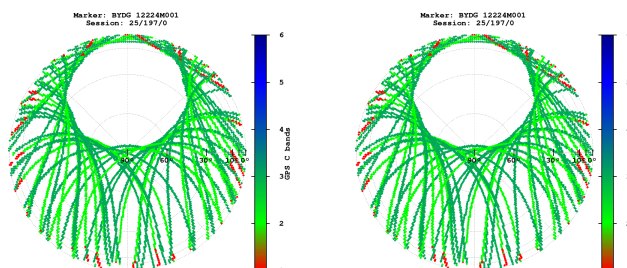


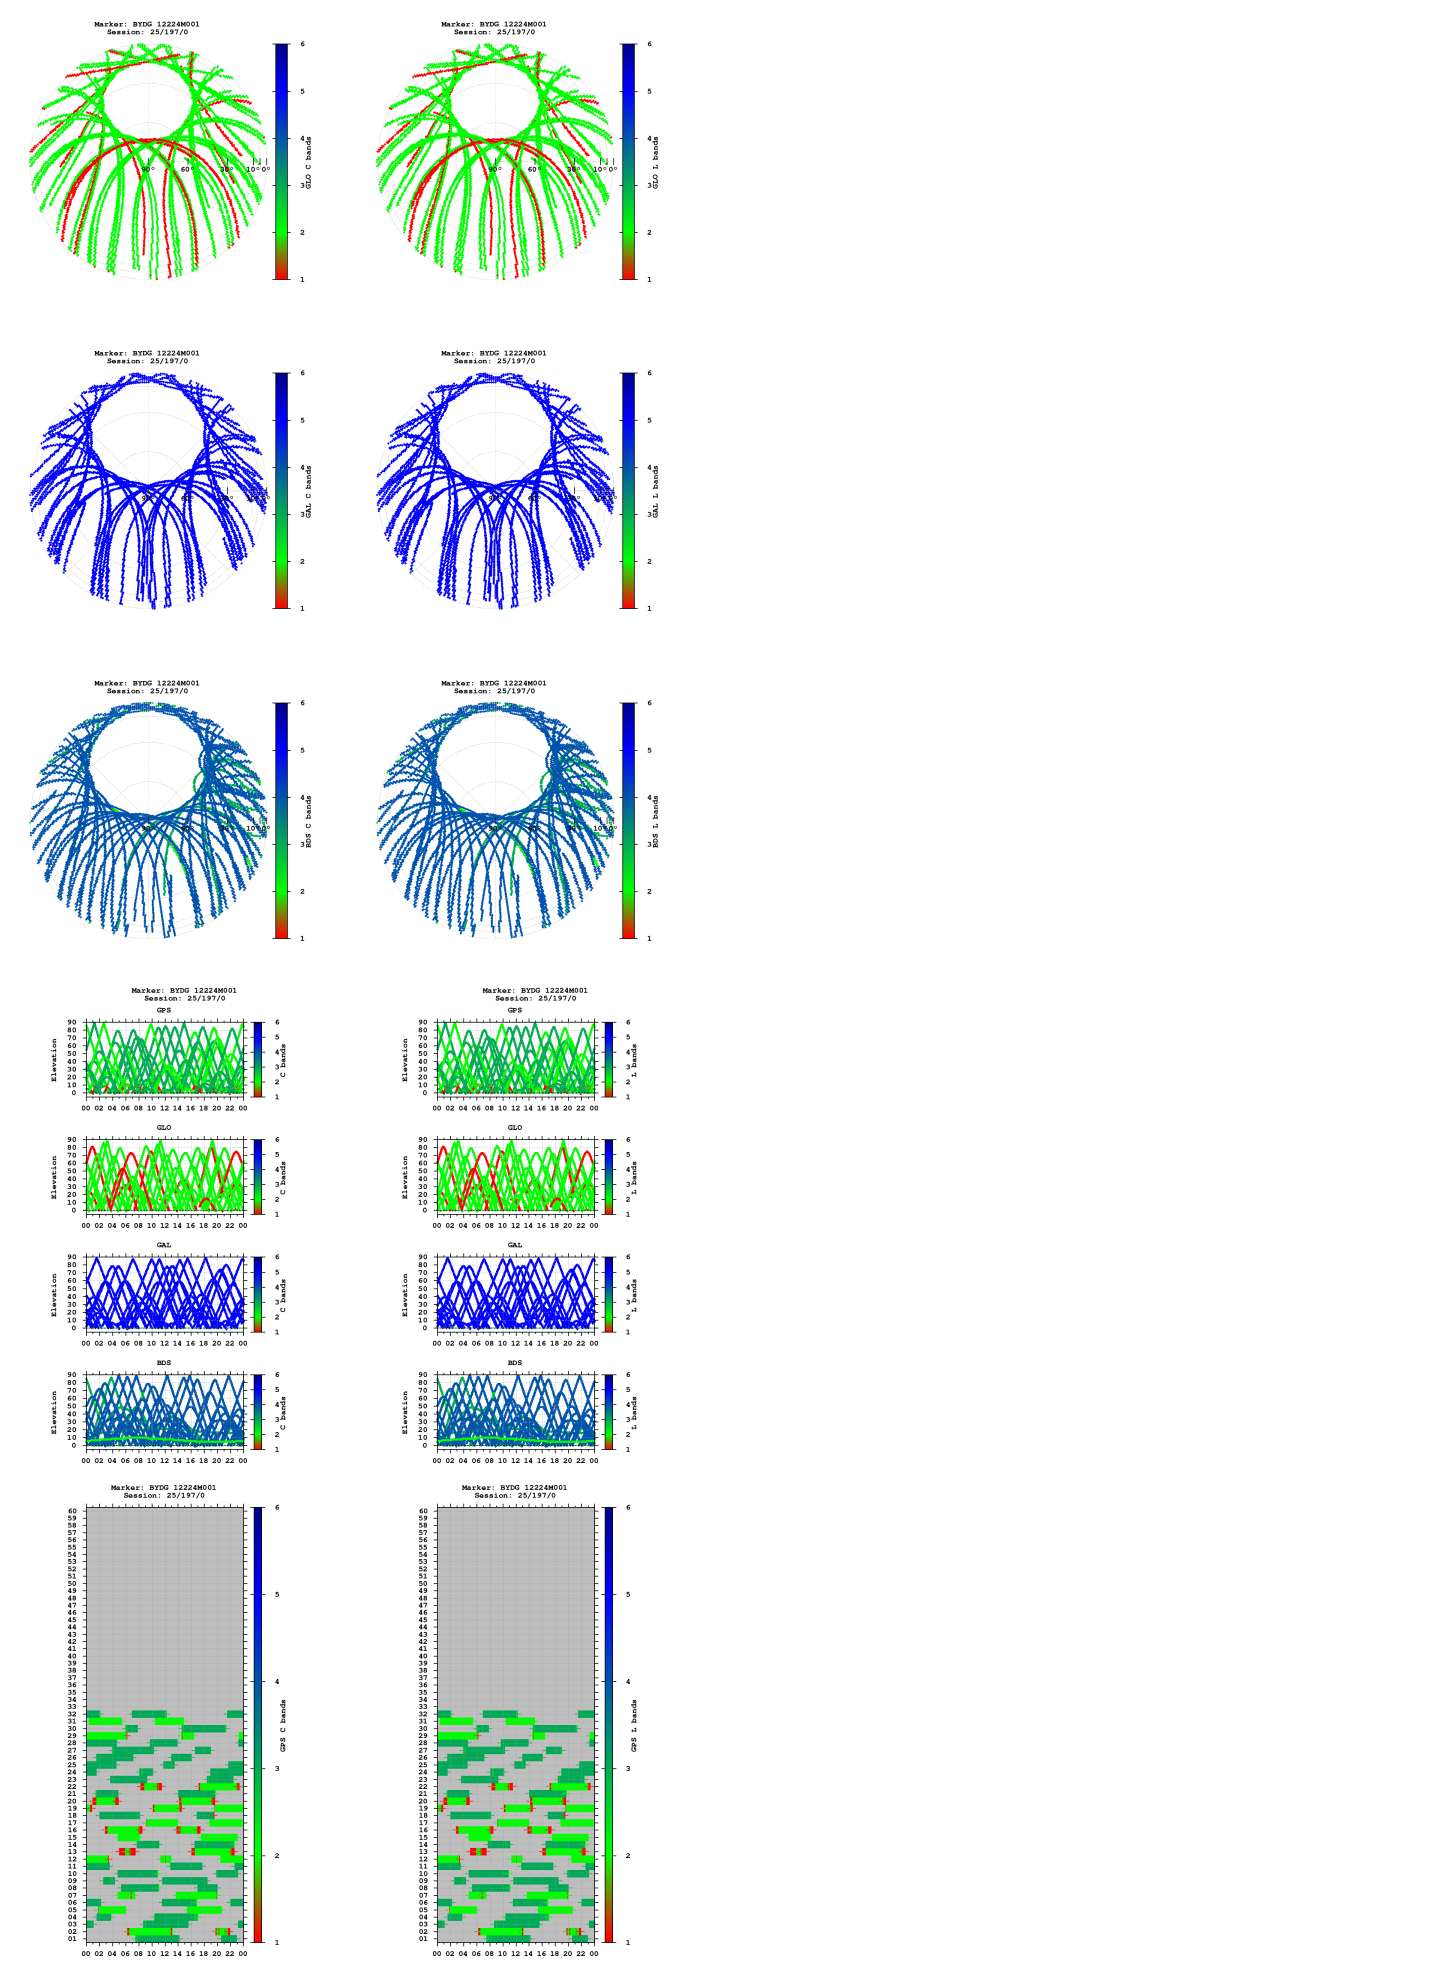


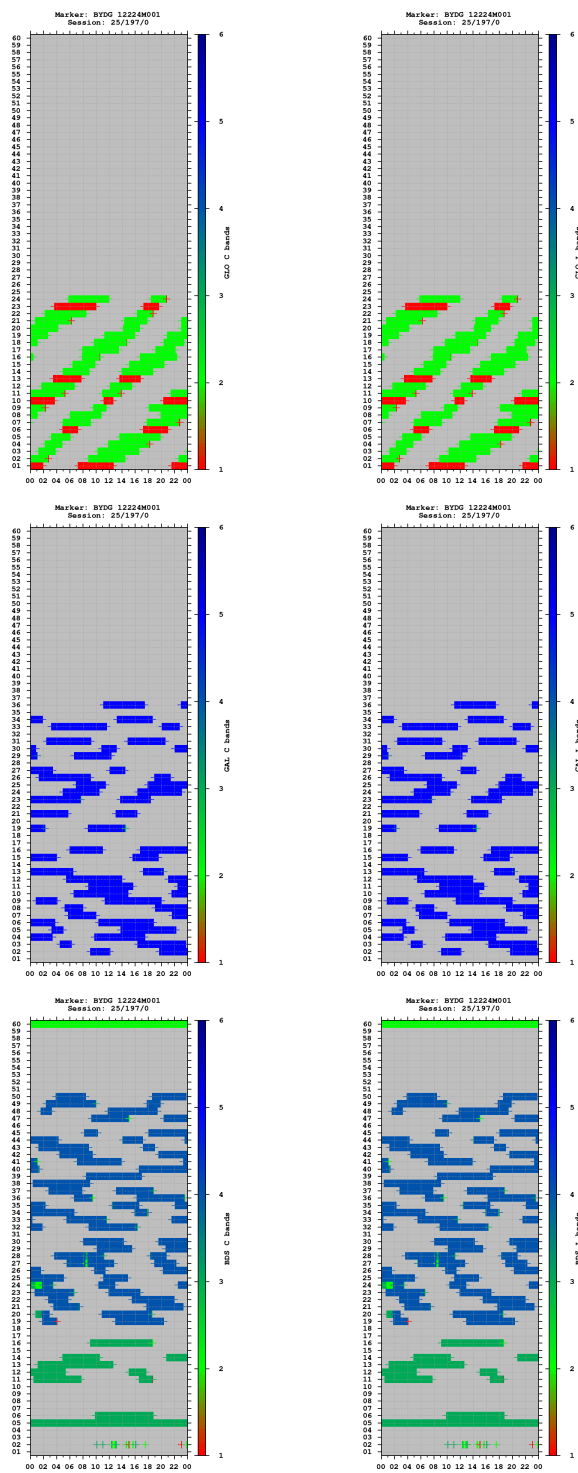


Observations

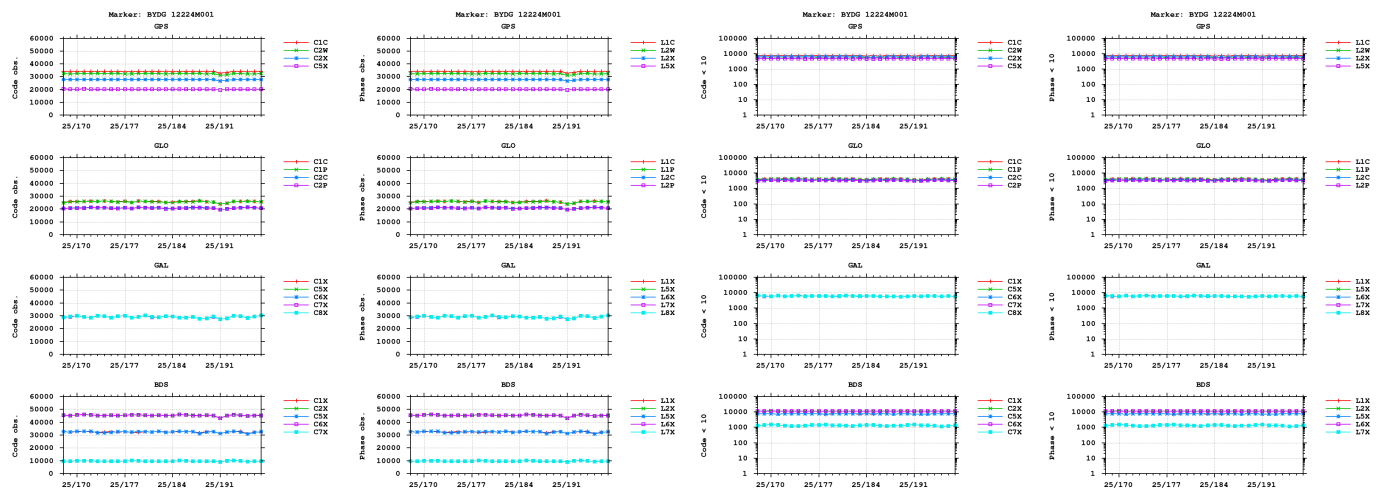


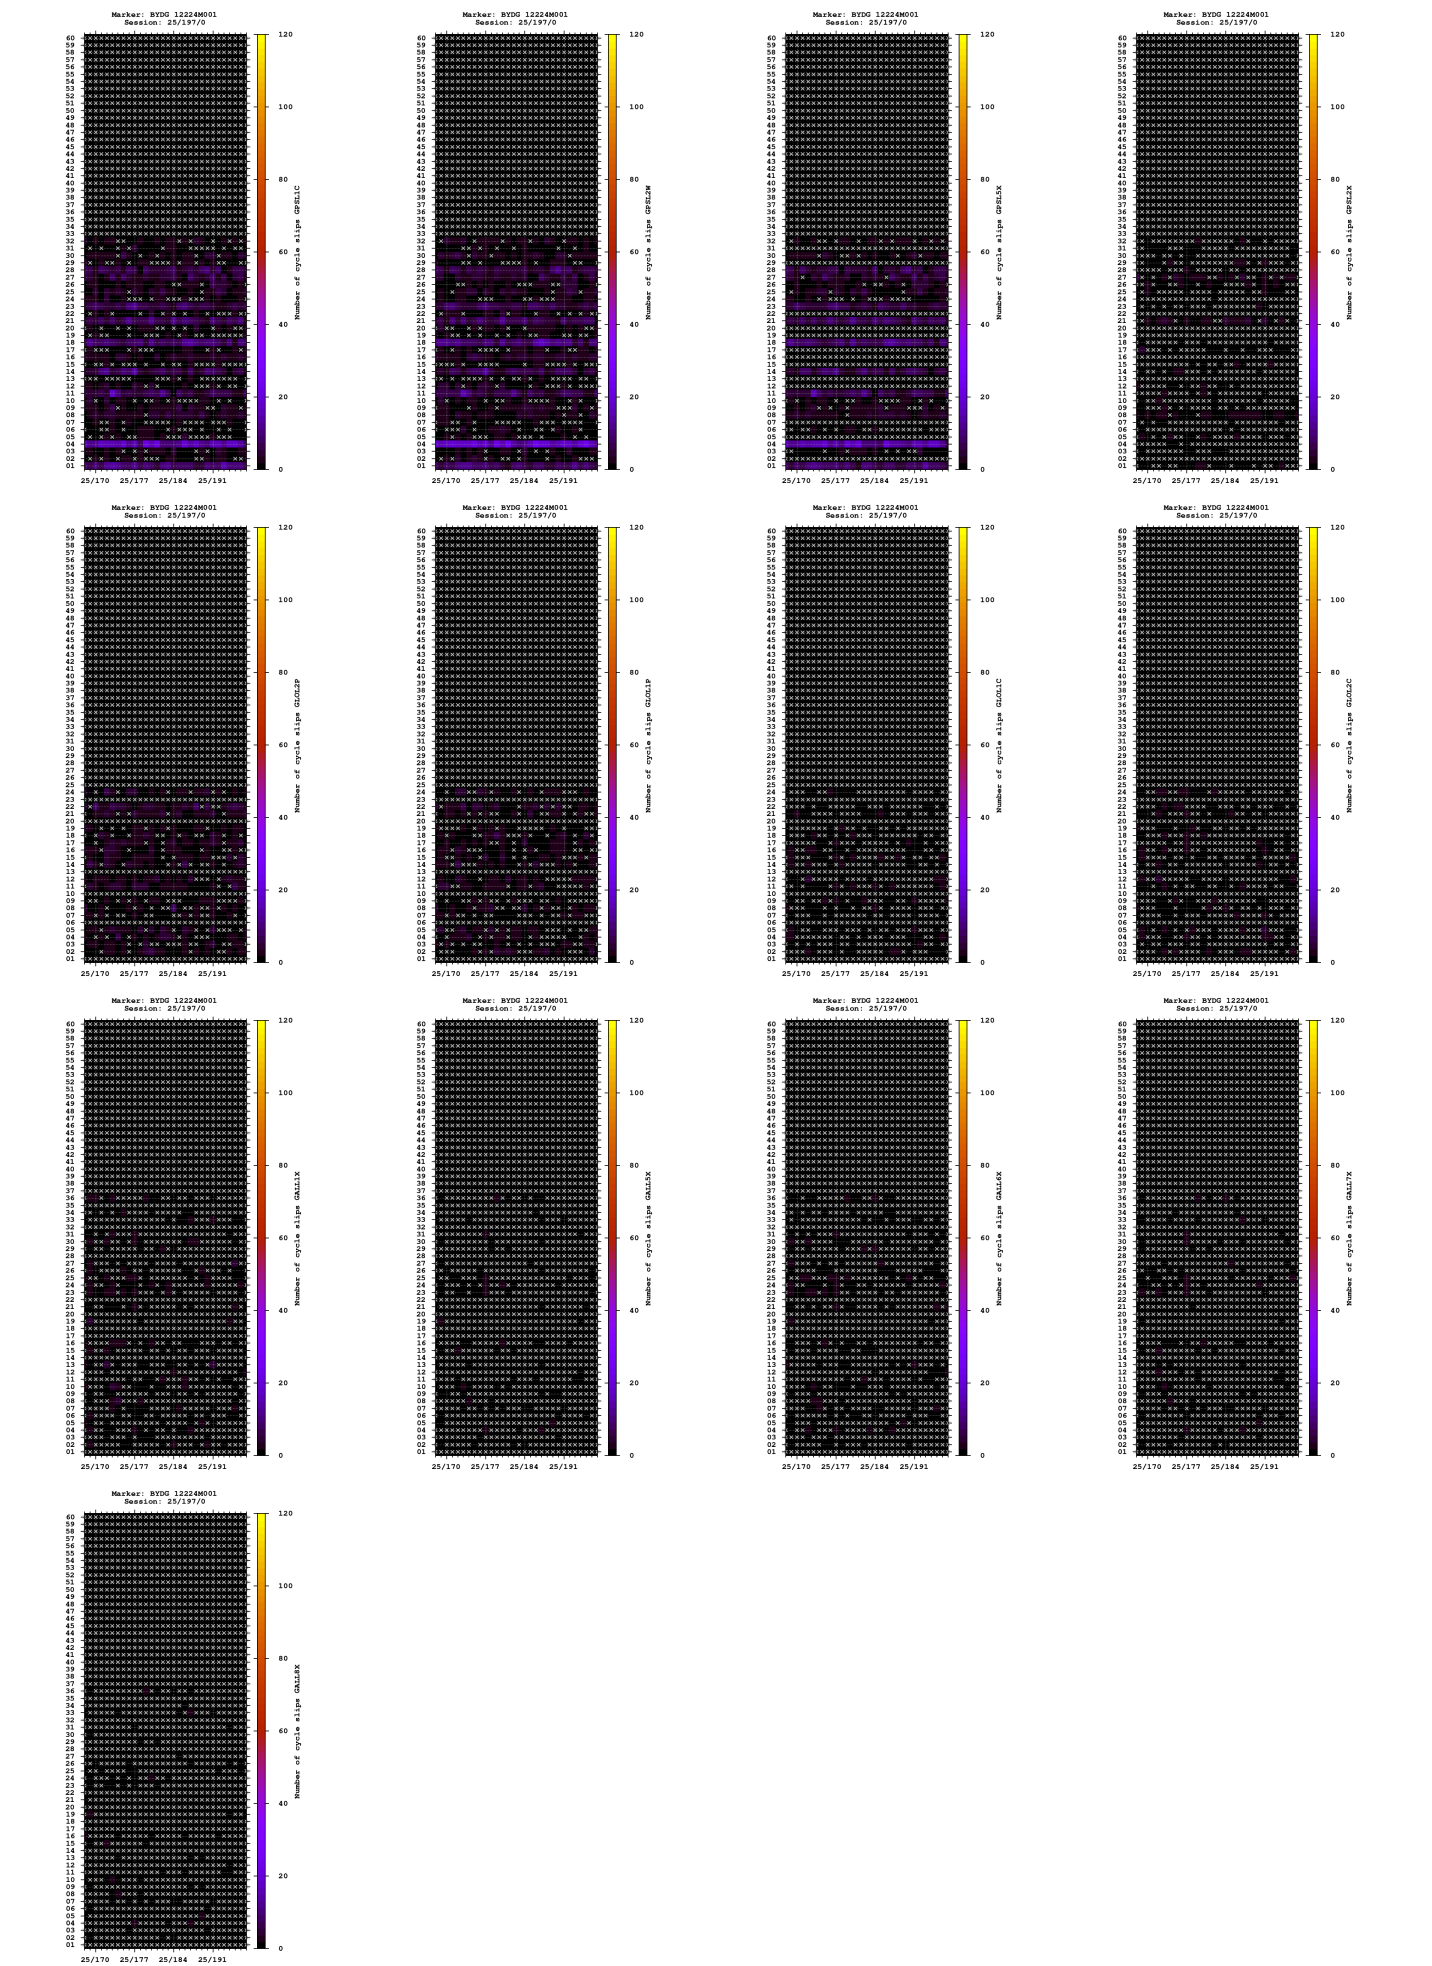


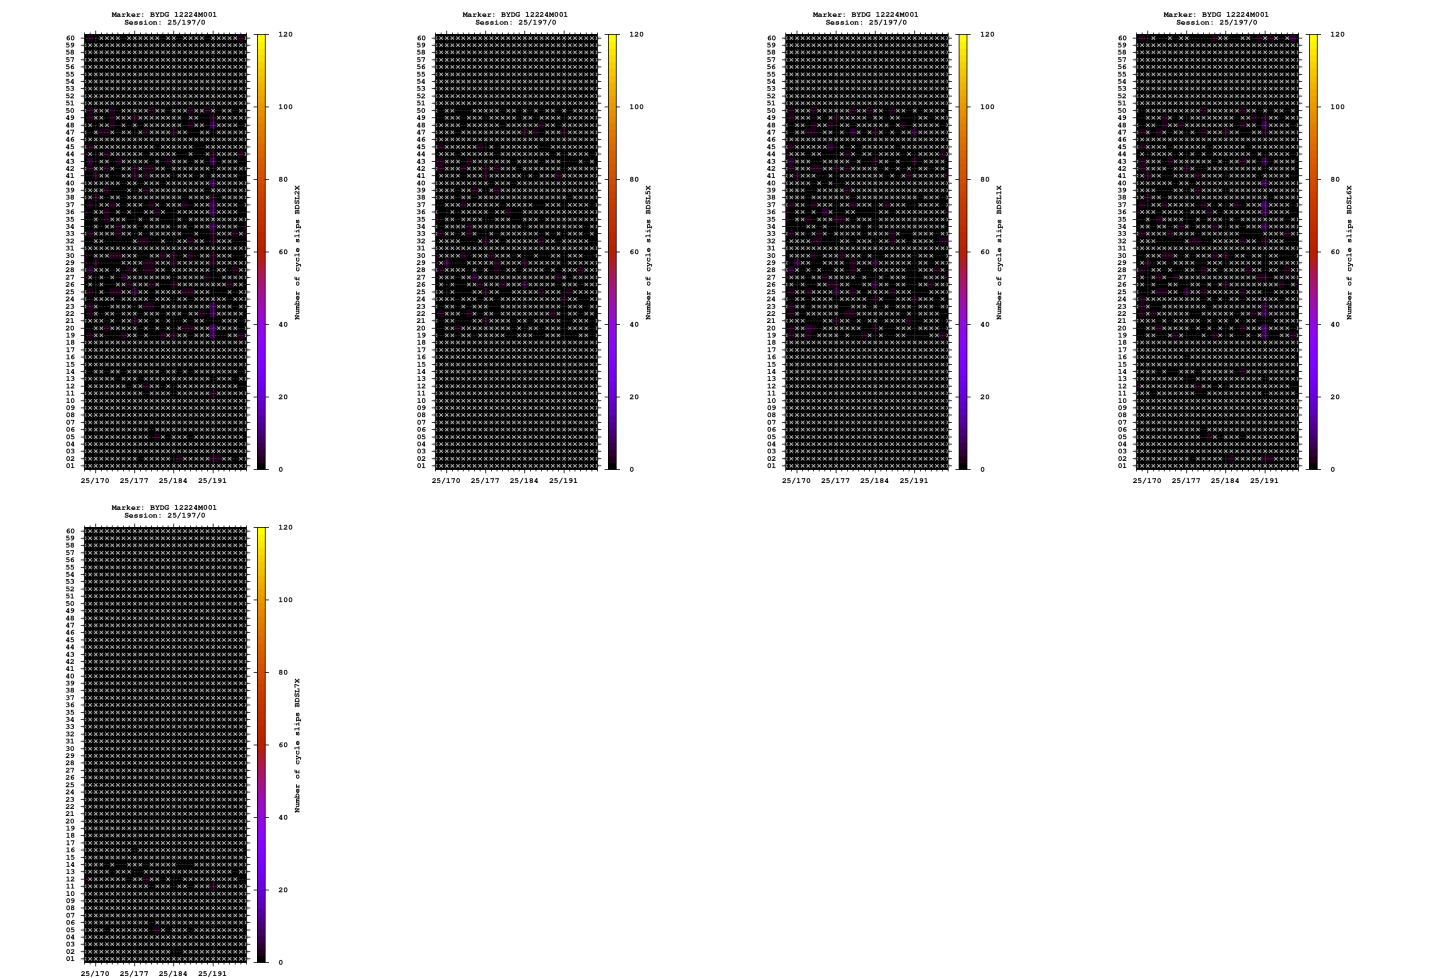


Multipath

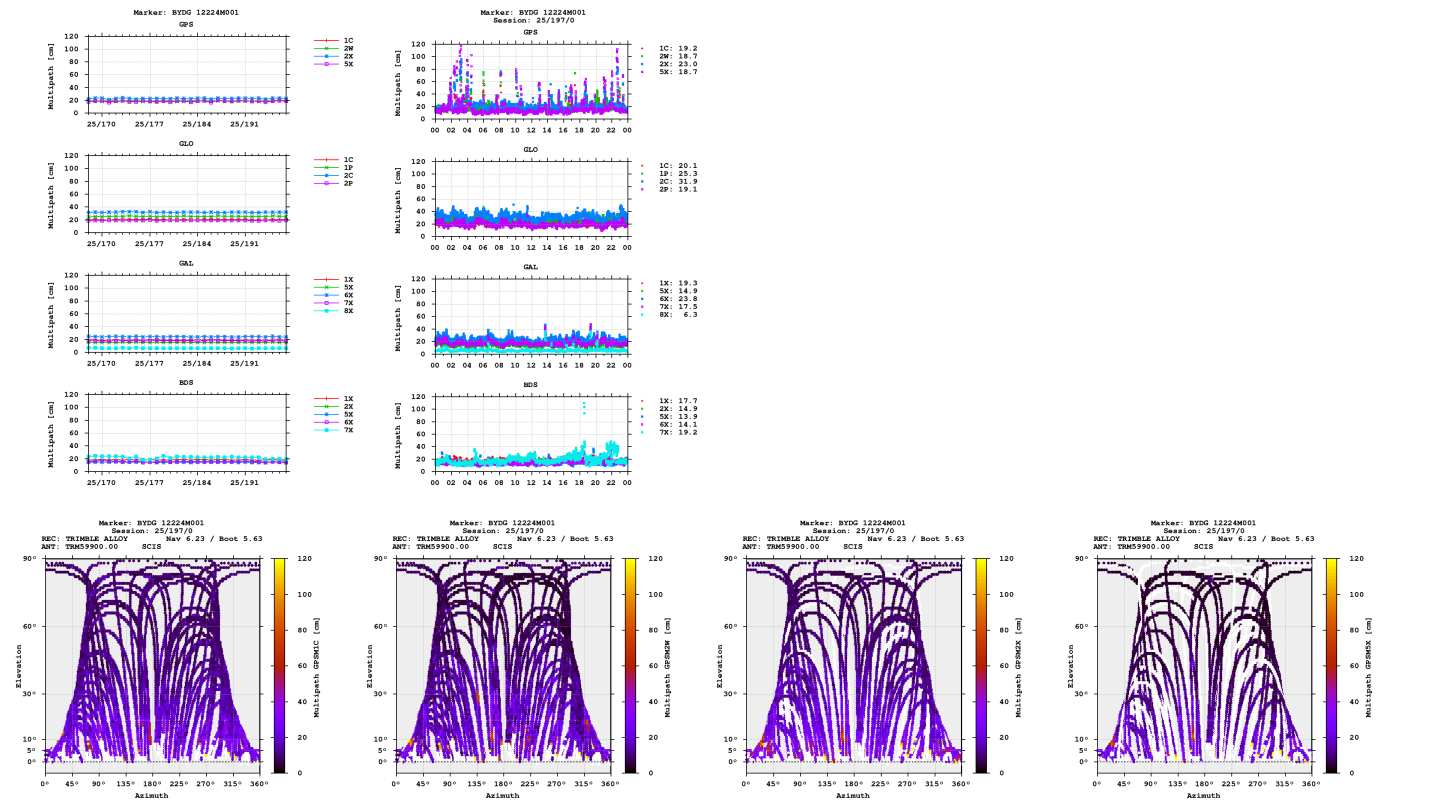

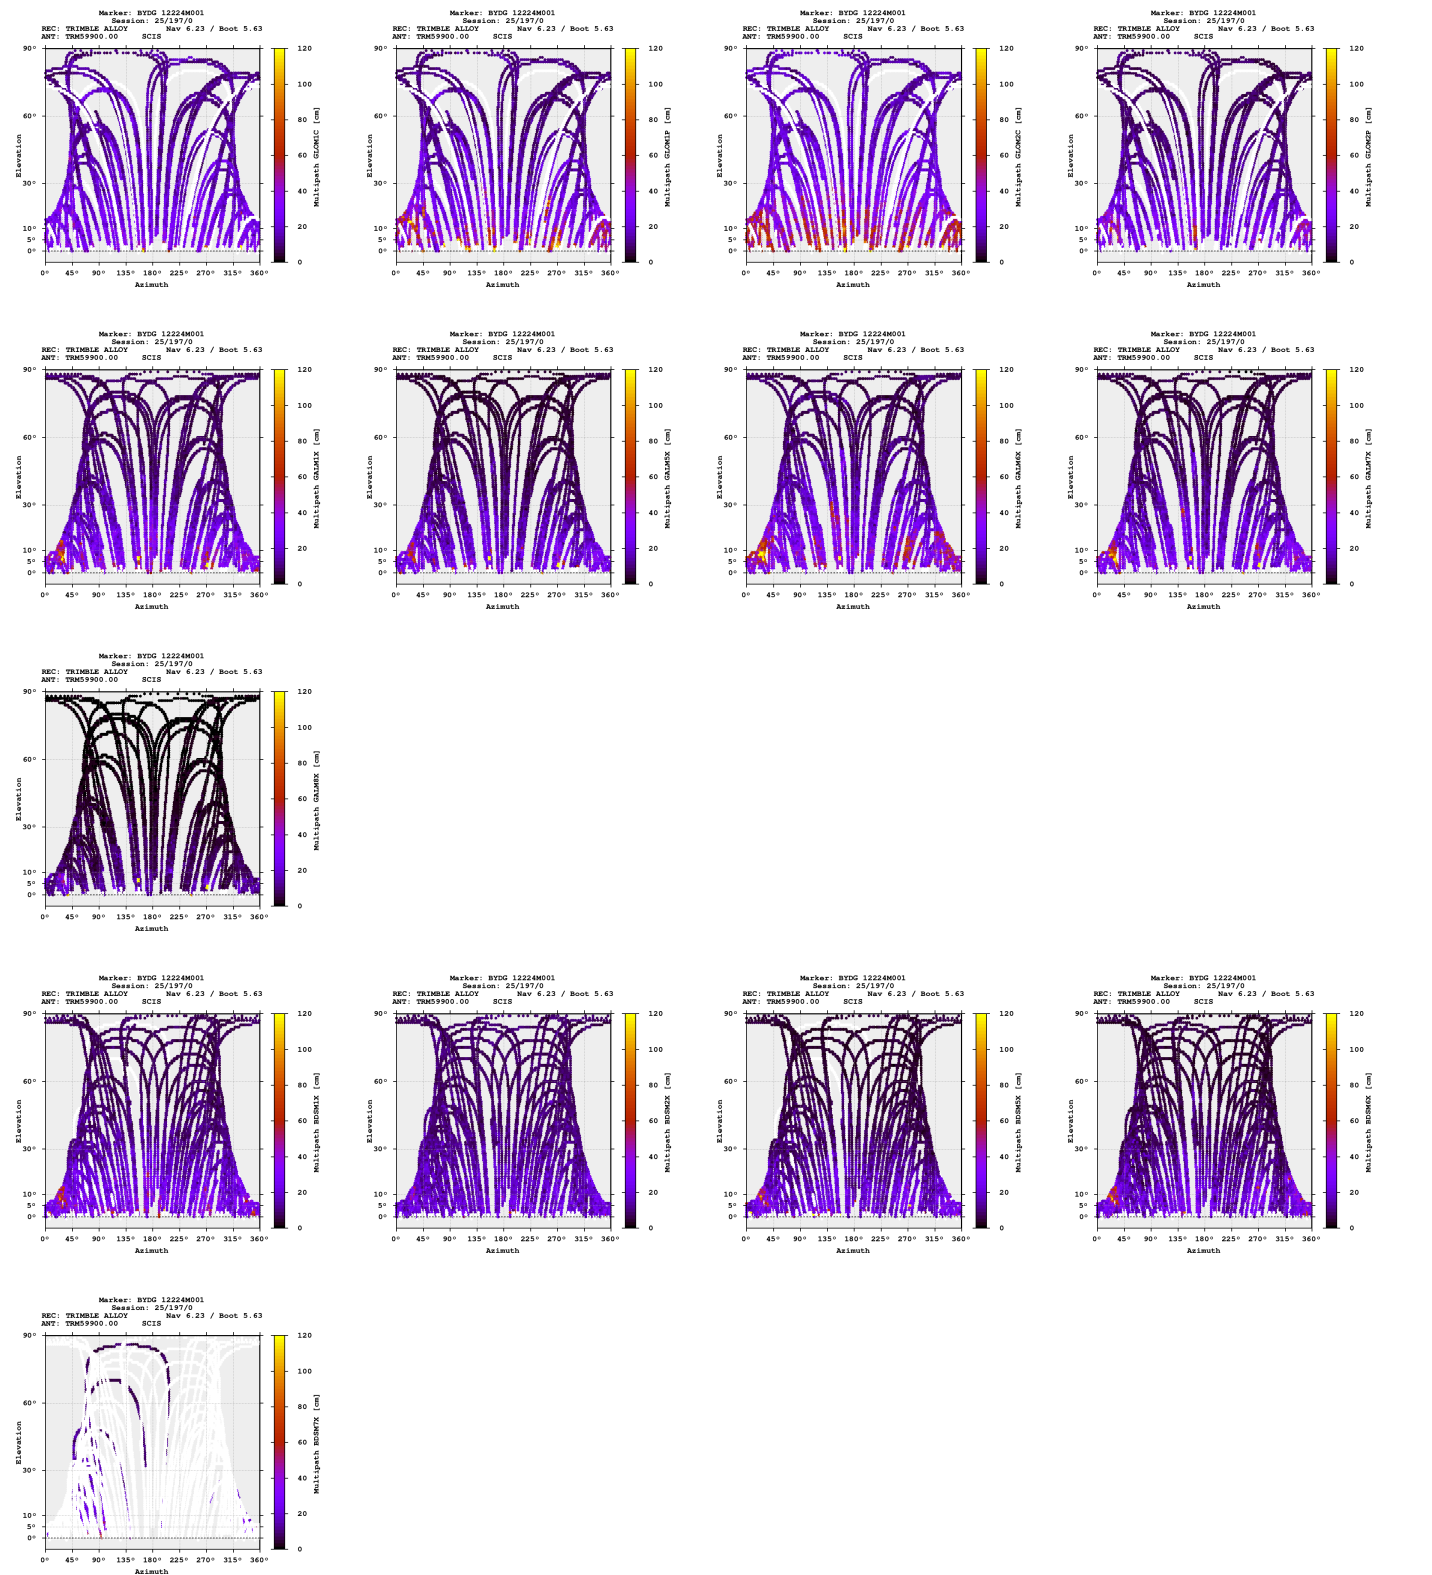


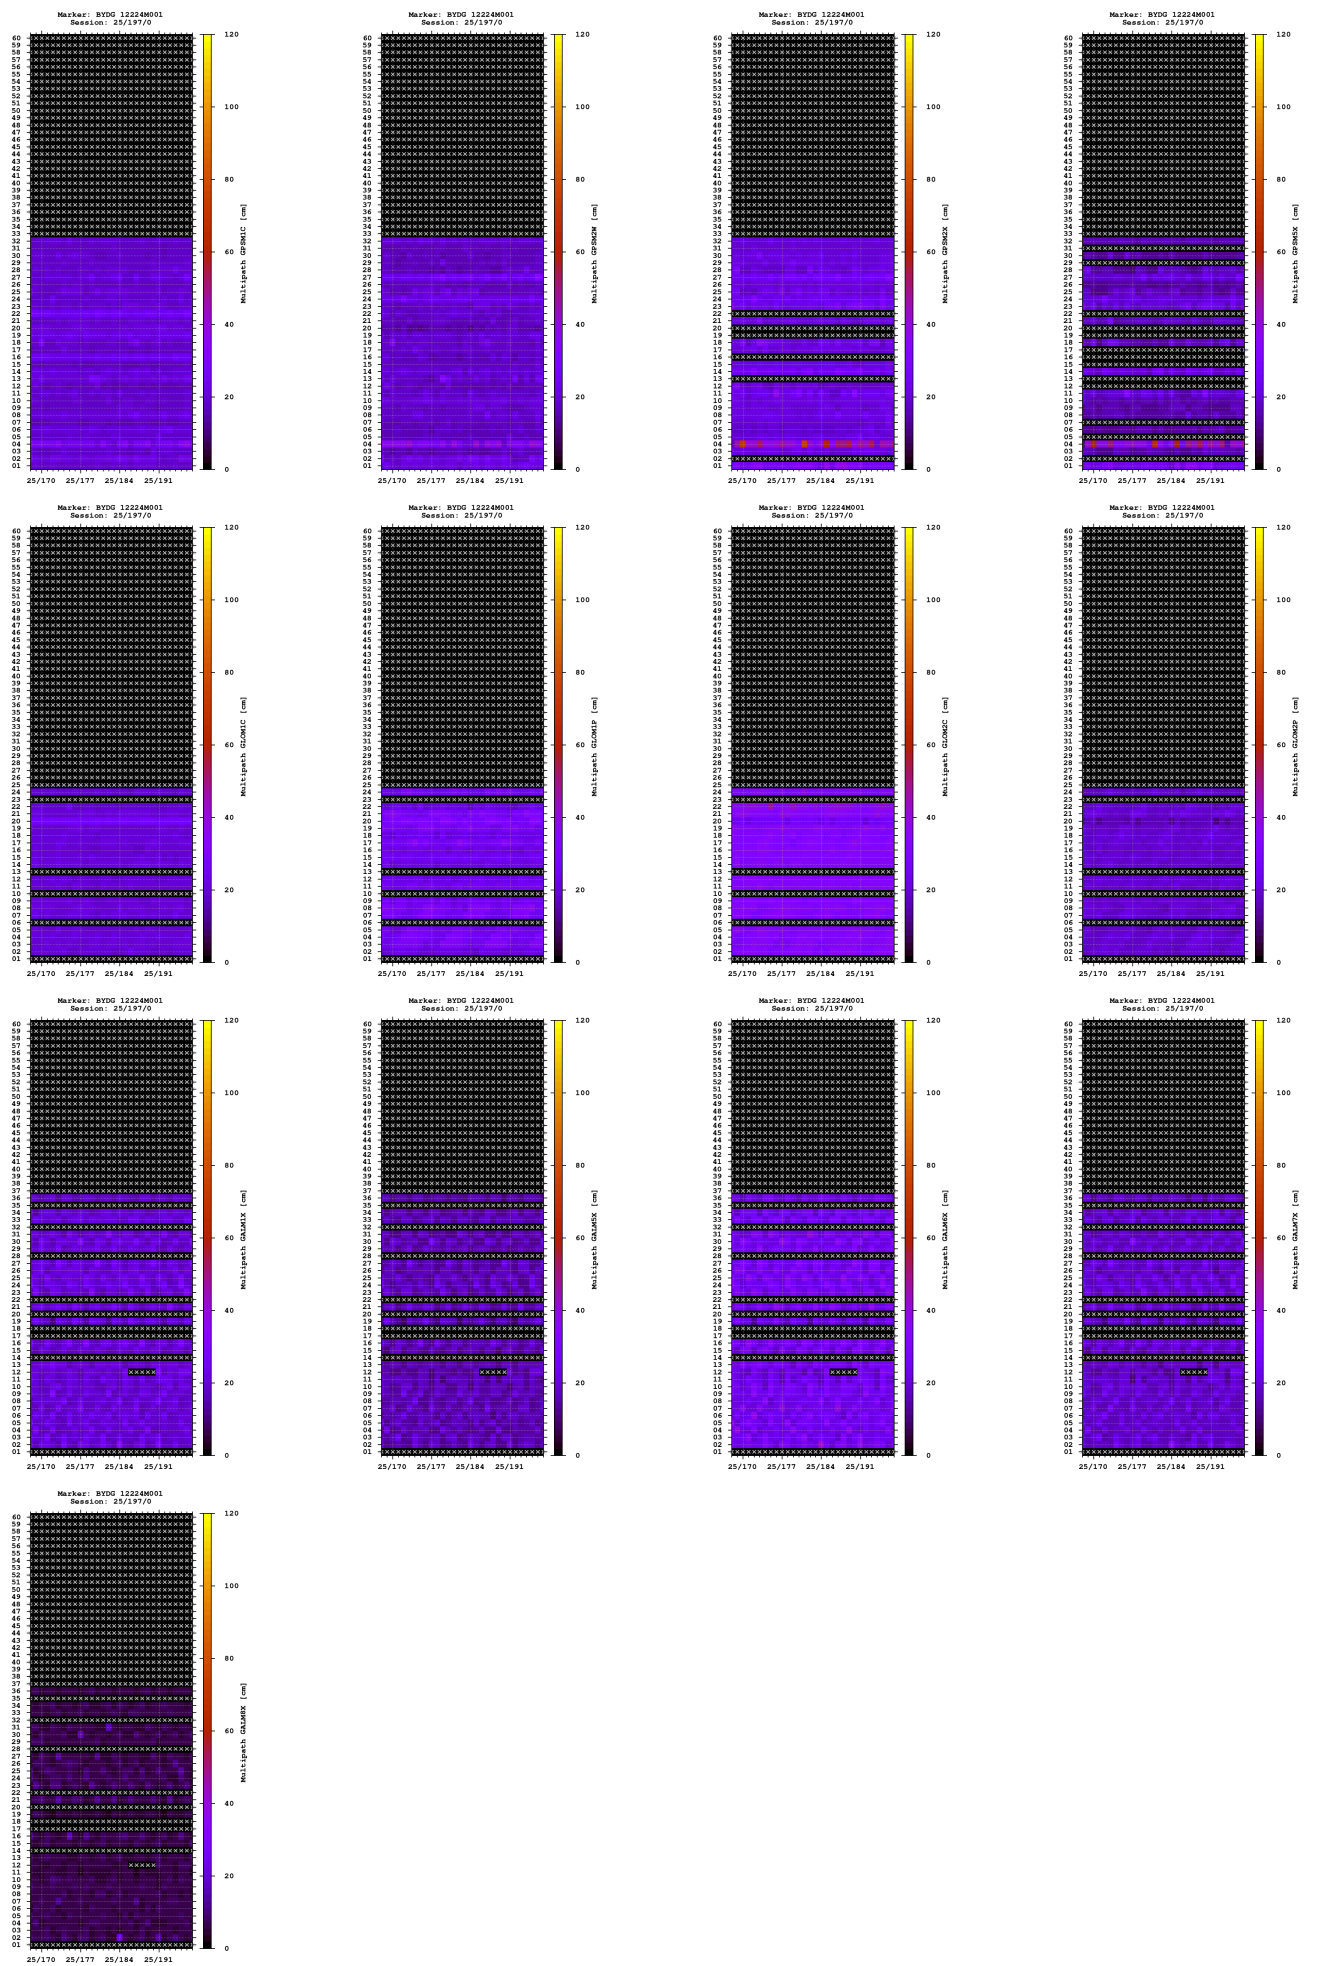

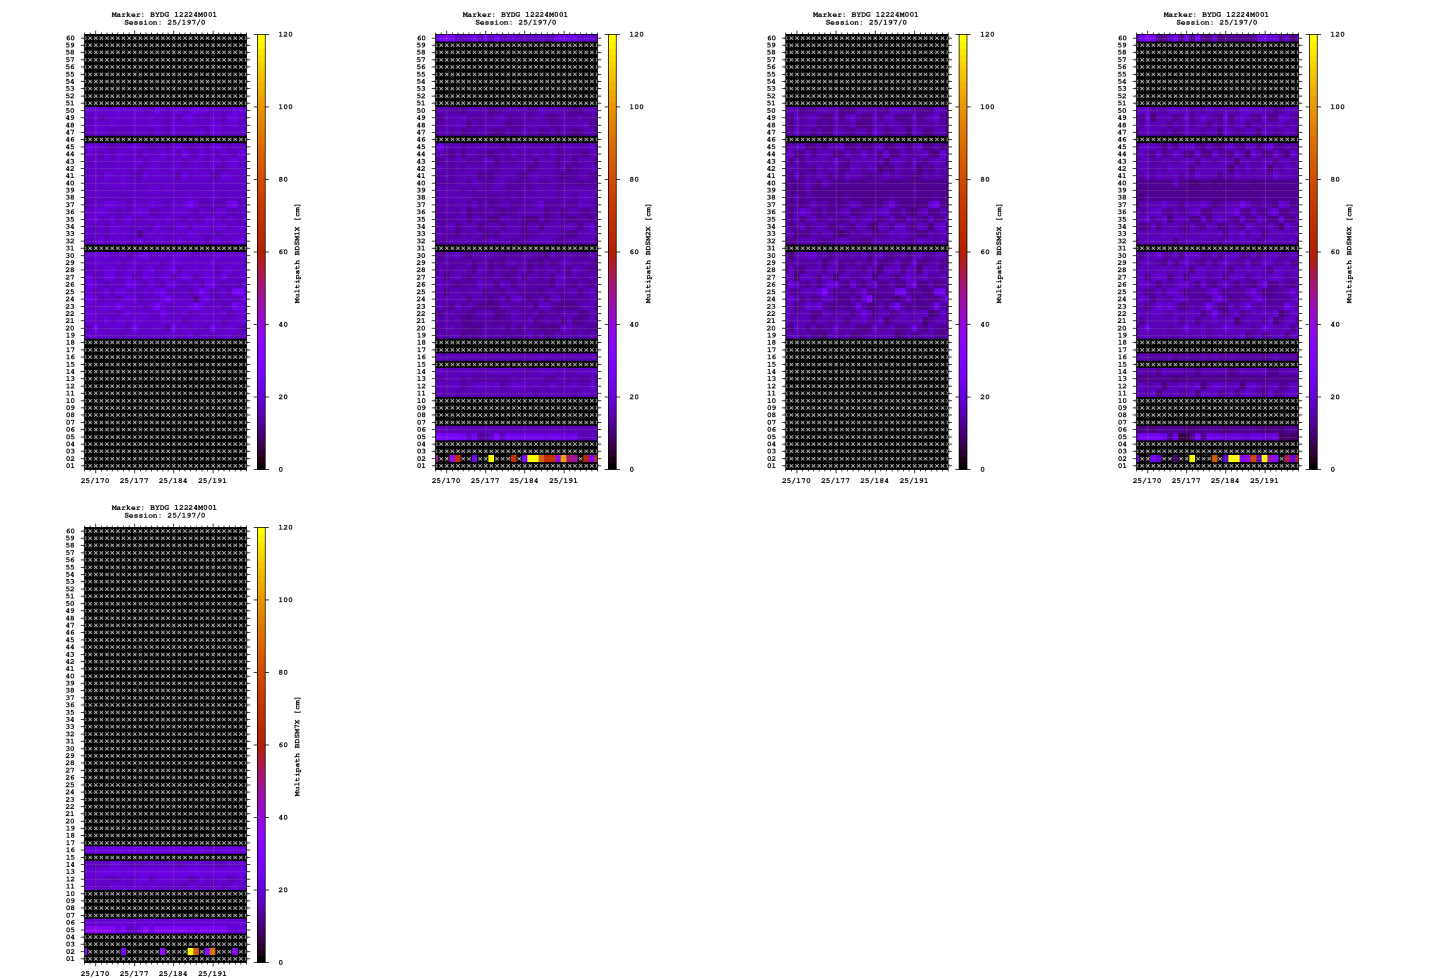



- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

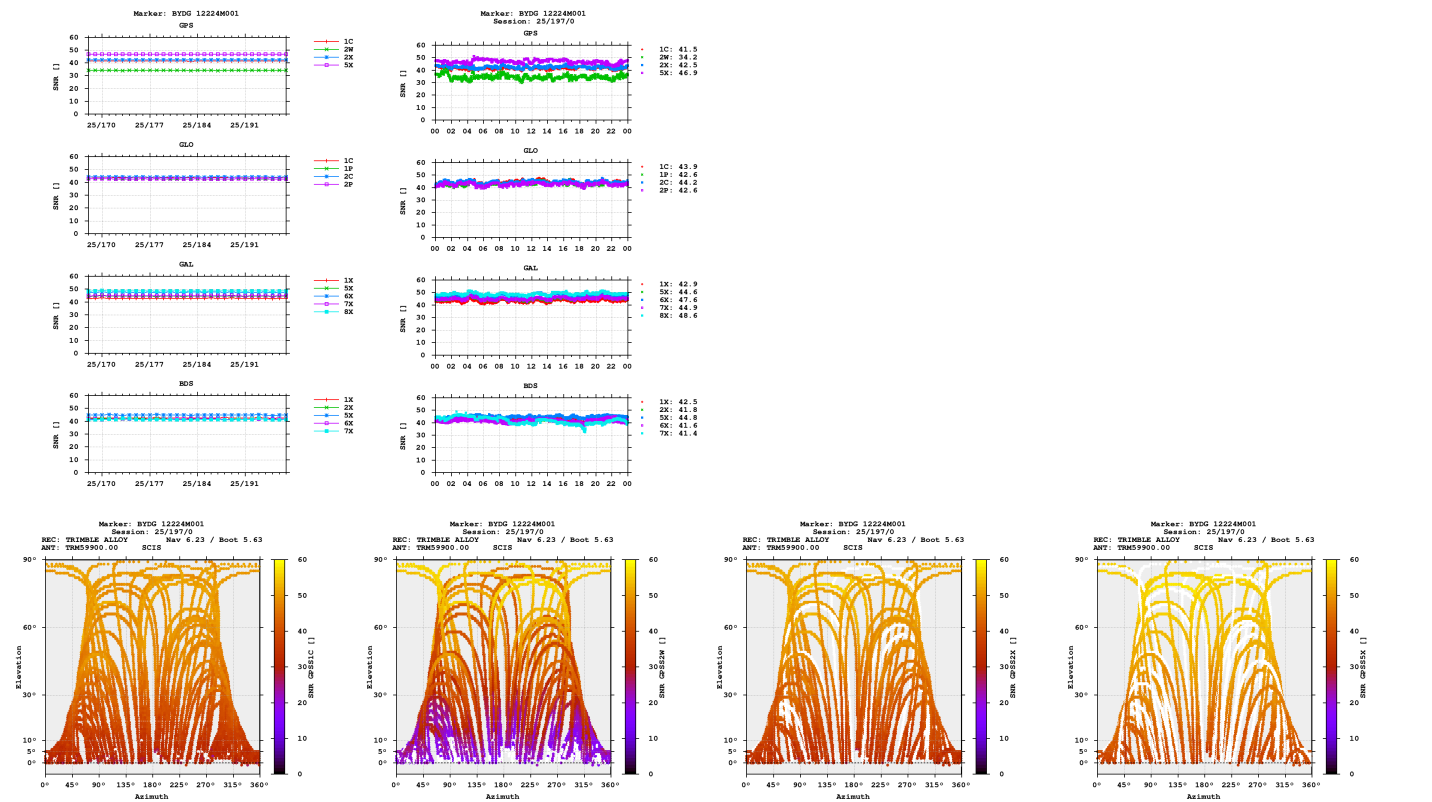




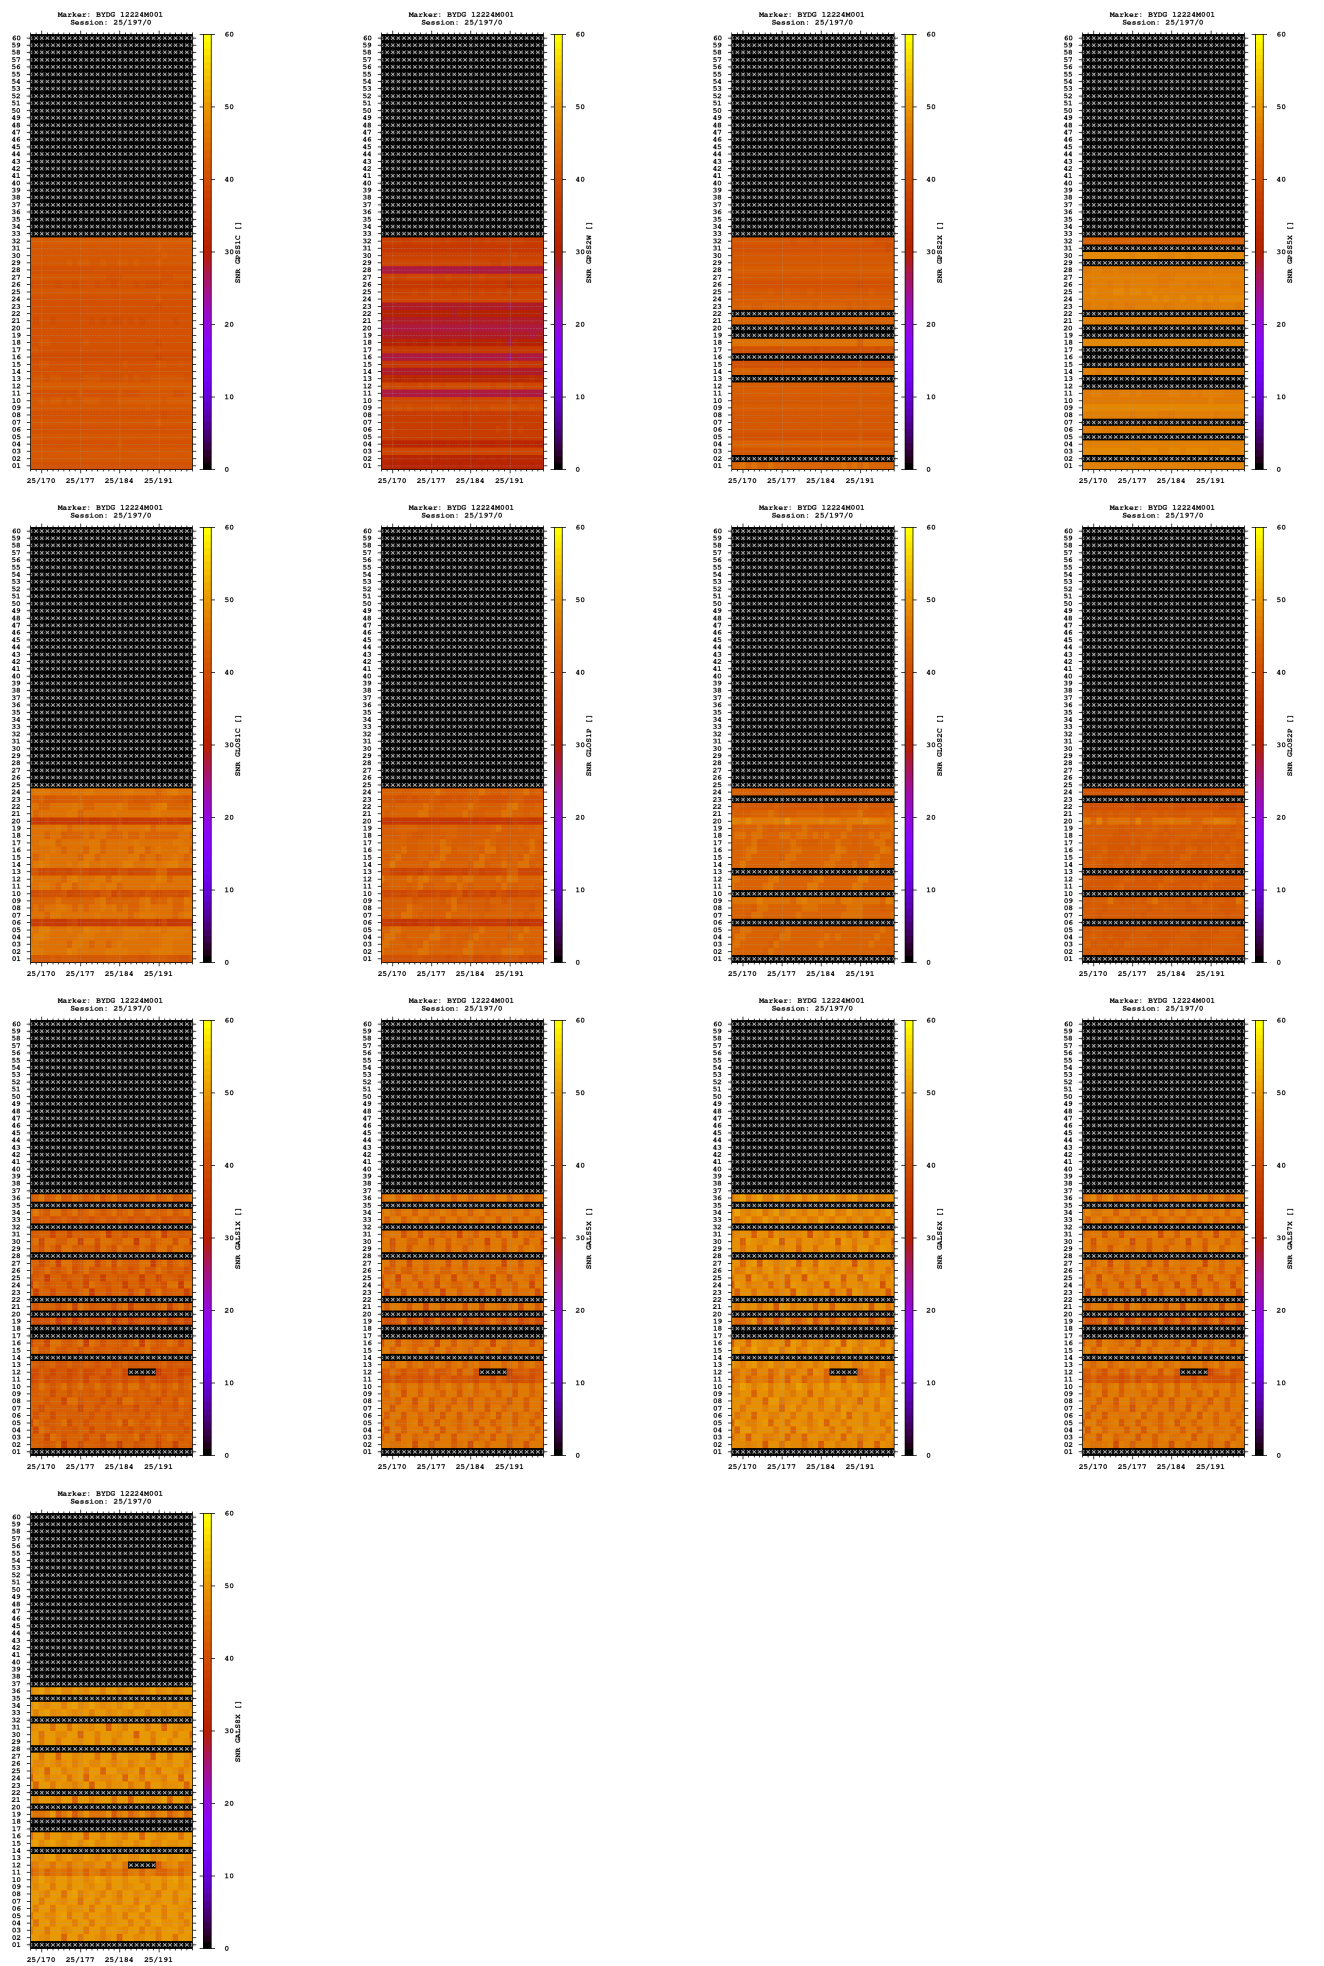


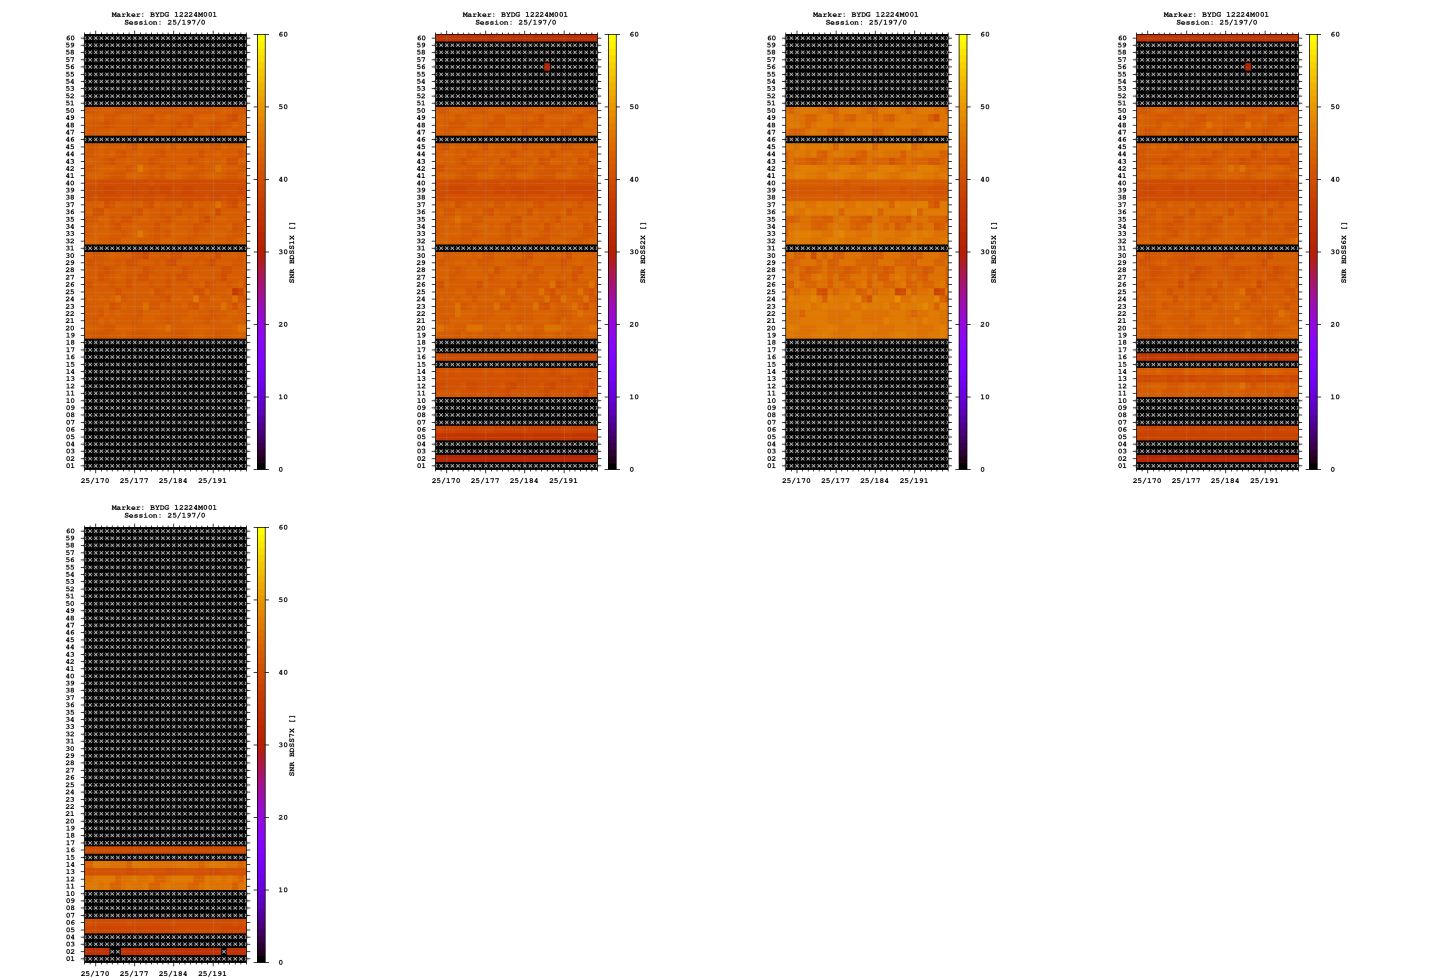

Estimates

2025-07-16 00:00:00	GPS	3647217.2200	1184604.9277	5079626.3156	53.134563584	17.993637066	105.6620
2025-07-16 00:00:00	GLO	3647216.2580	1184604.0142	5079623.9623	53.134559503	17.993628524	103.0611
2025-07-16 00:00:00	GAL	3647216.8458	1184604.7401	5079625.6455	53.134562962	17.993636158	104.8998
2025-07-16 00:00:00	BDS	3647216.0675	1184604.4005	5079626.3427	53.134572781	17.993634893	104.9284

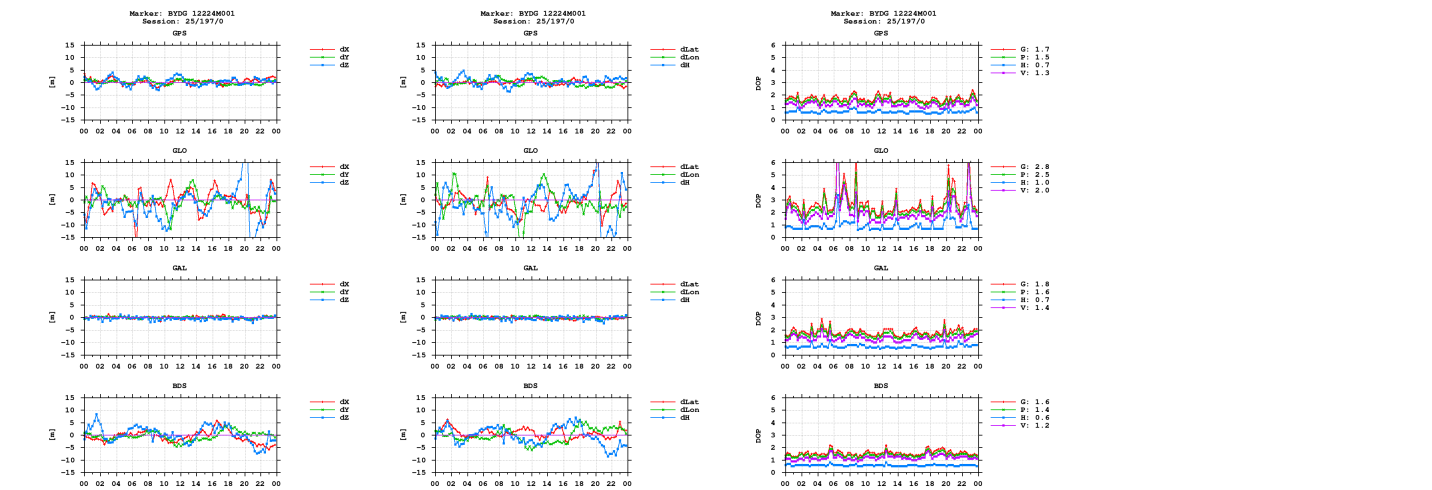

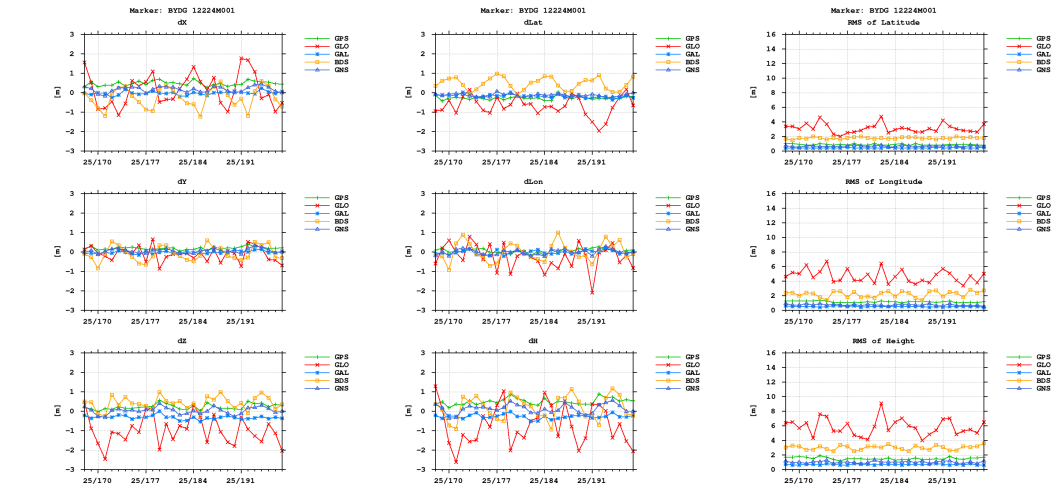

Equipment

2025-06-17 00:00:00 TRIMBLE ALLOY Nav 6.23 / Boot 5.63 6322R401 TRIMBLE AL

Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)