

GNSS observation file monitoring for ERST

Last RINEX file: ERST2600.26D.Z


RINEX version: 3.04

Marker: ERST

Receiver: 5433R492 TRIMBLE NETR9 5.56

Antenna: TRM105000.10 NONE


Epochs

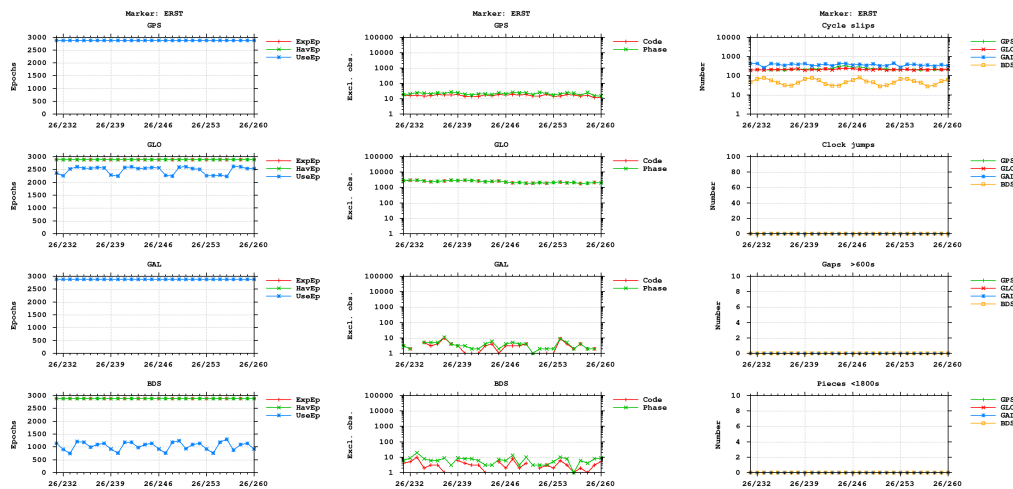


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

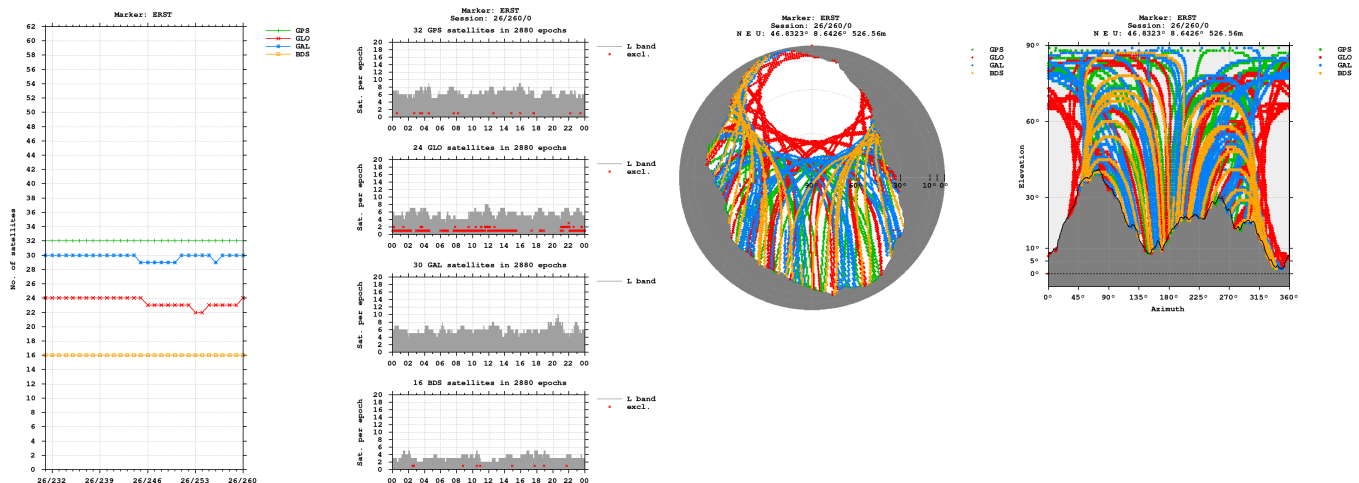


Bands

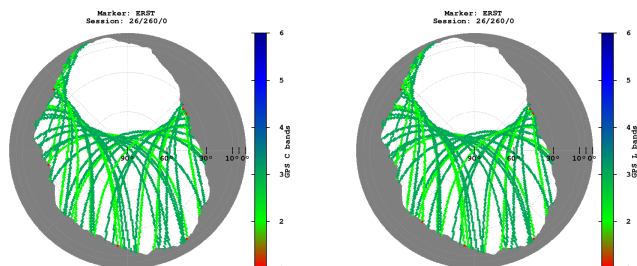


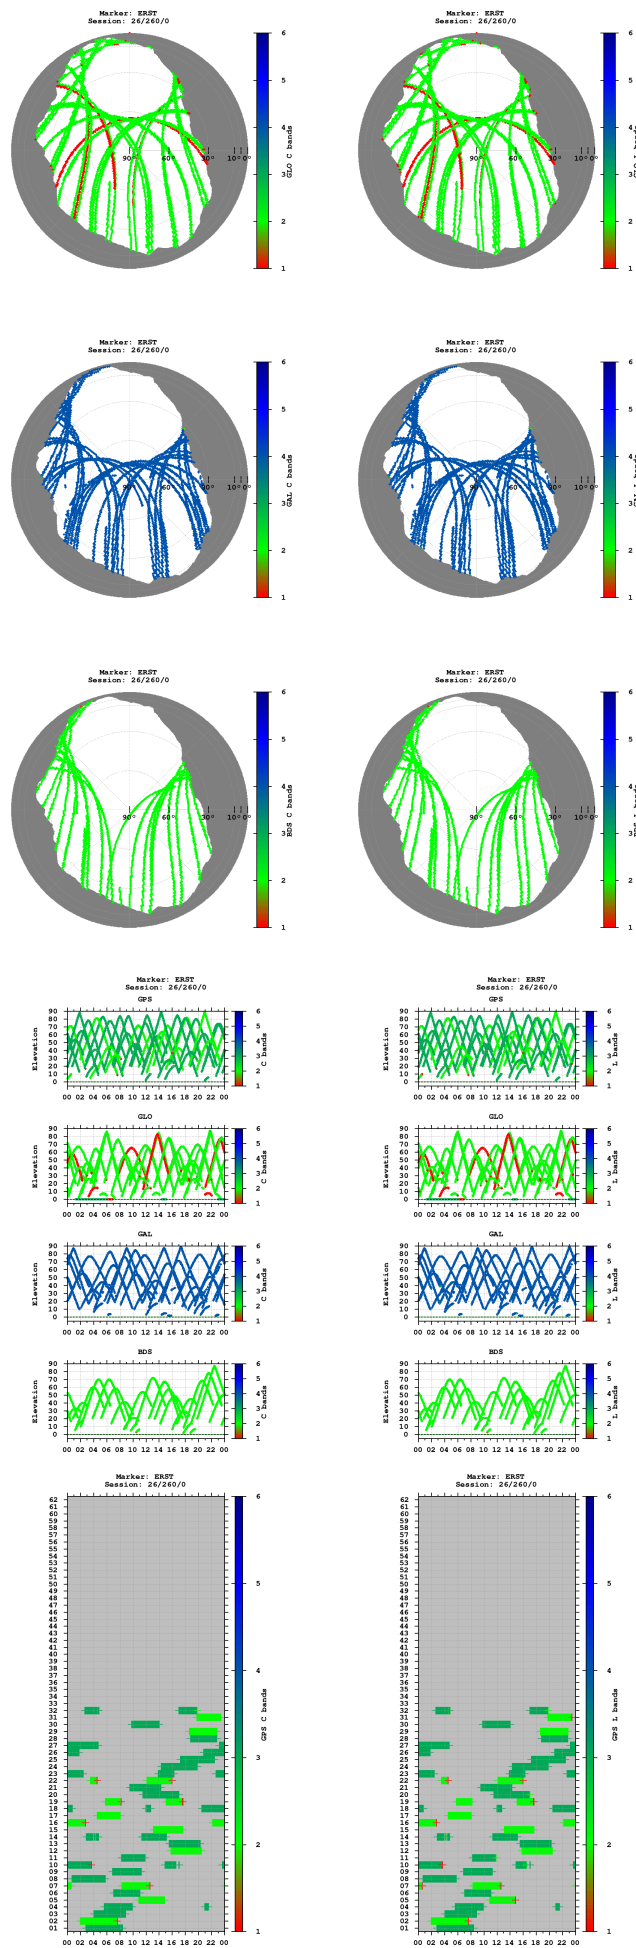


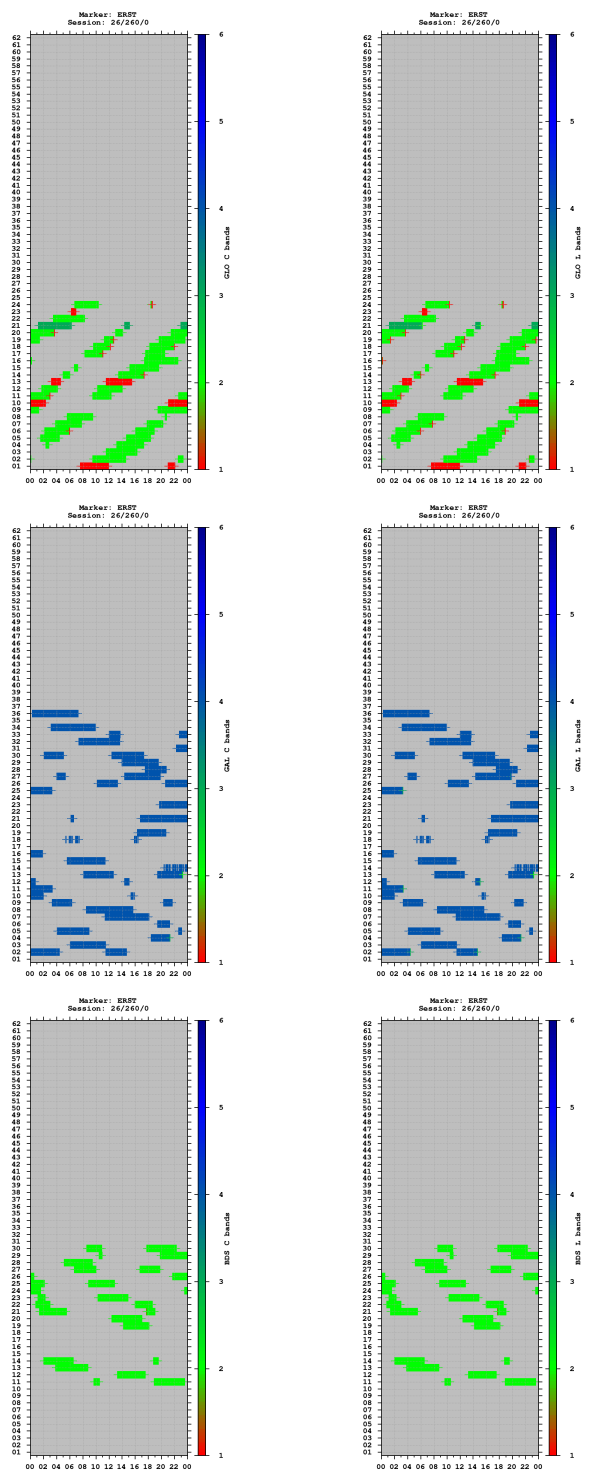


Observations

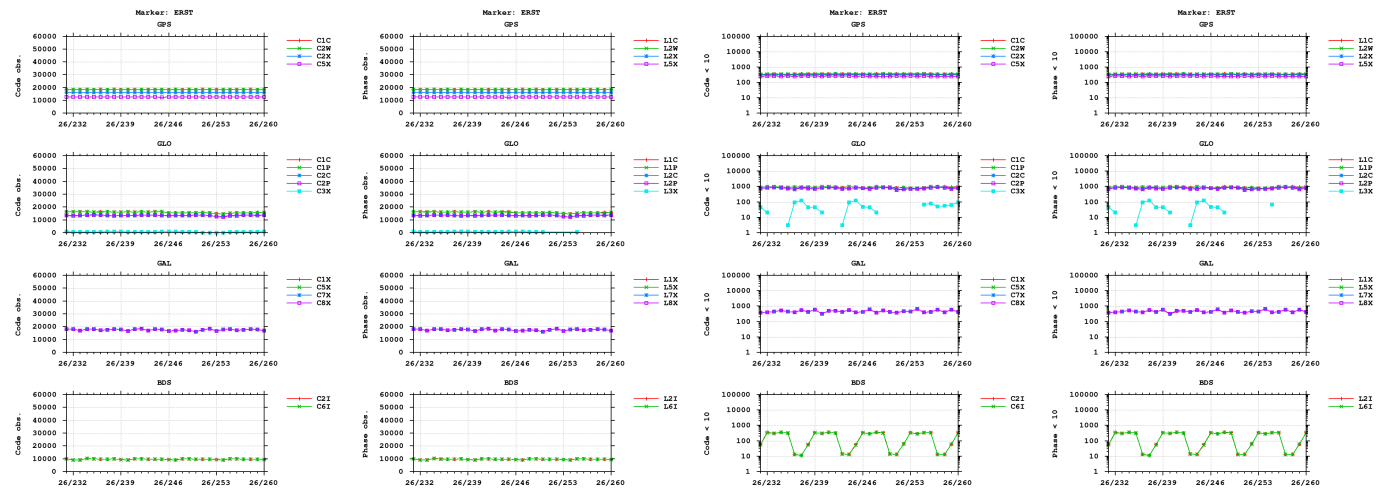


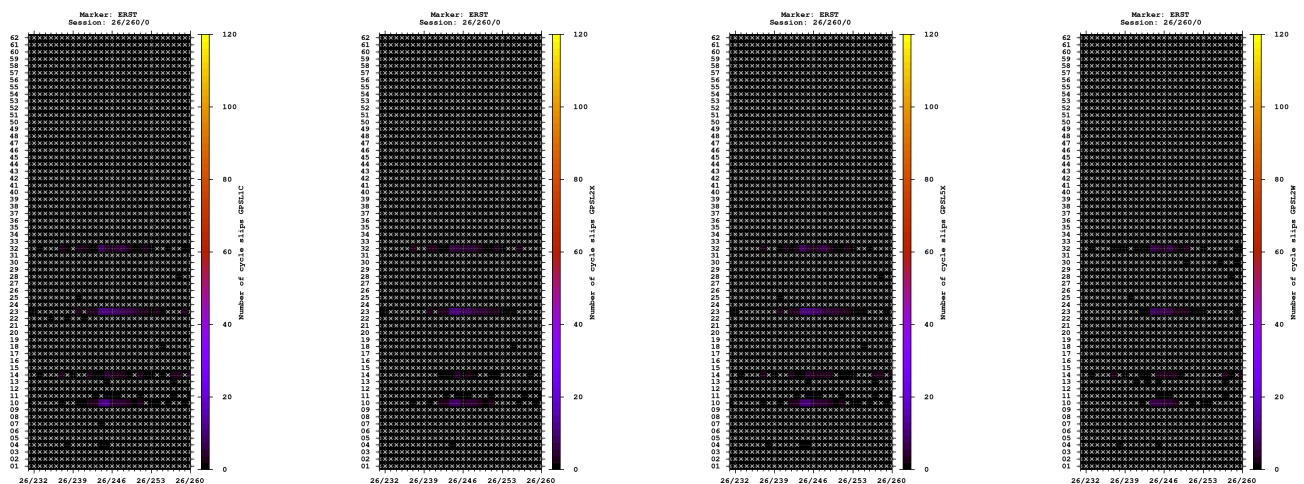


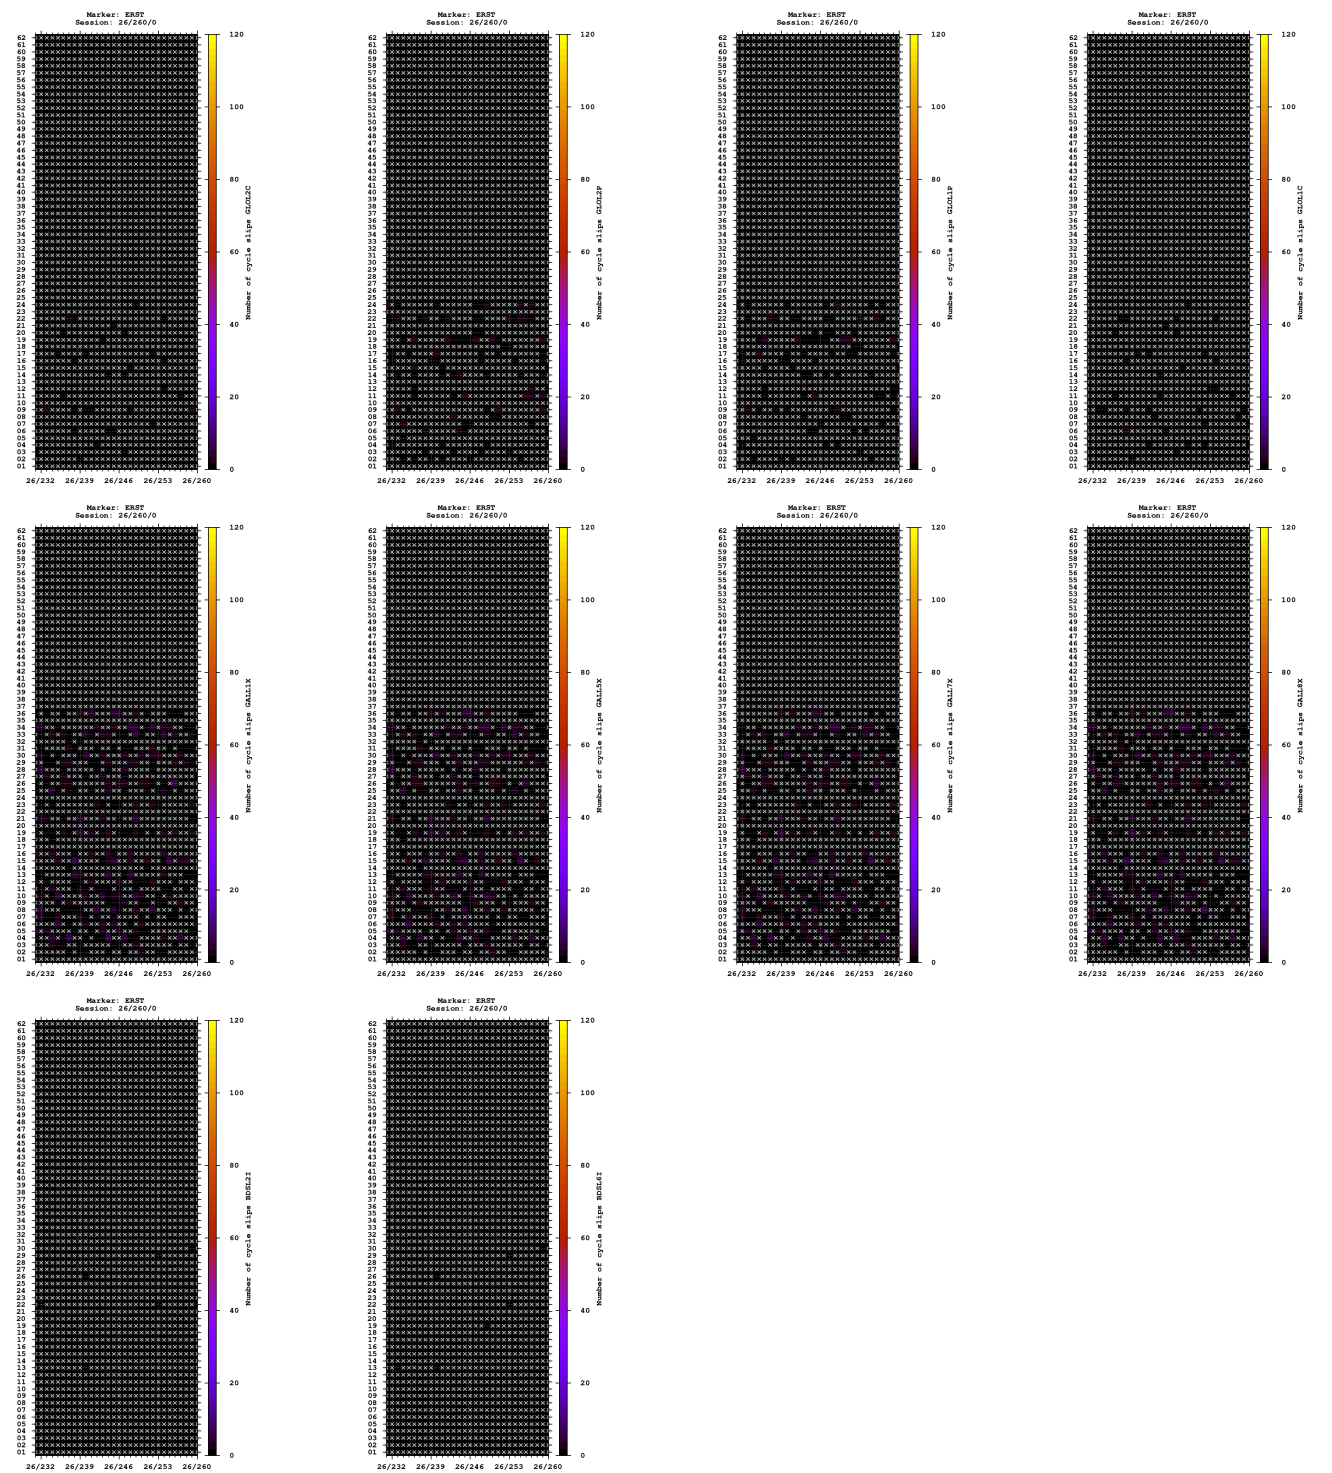


Multipath

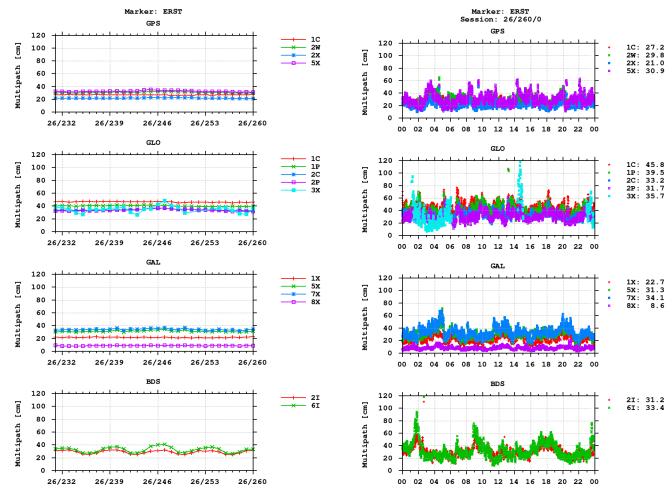


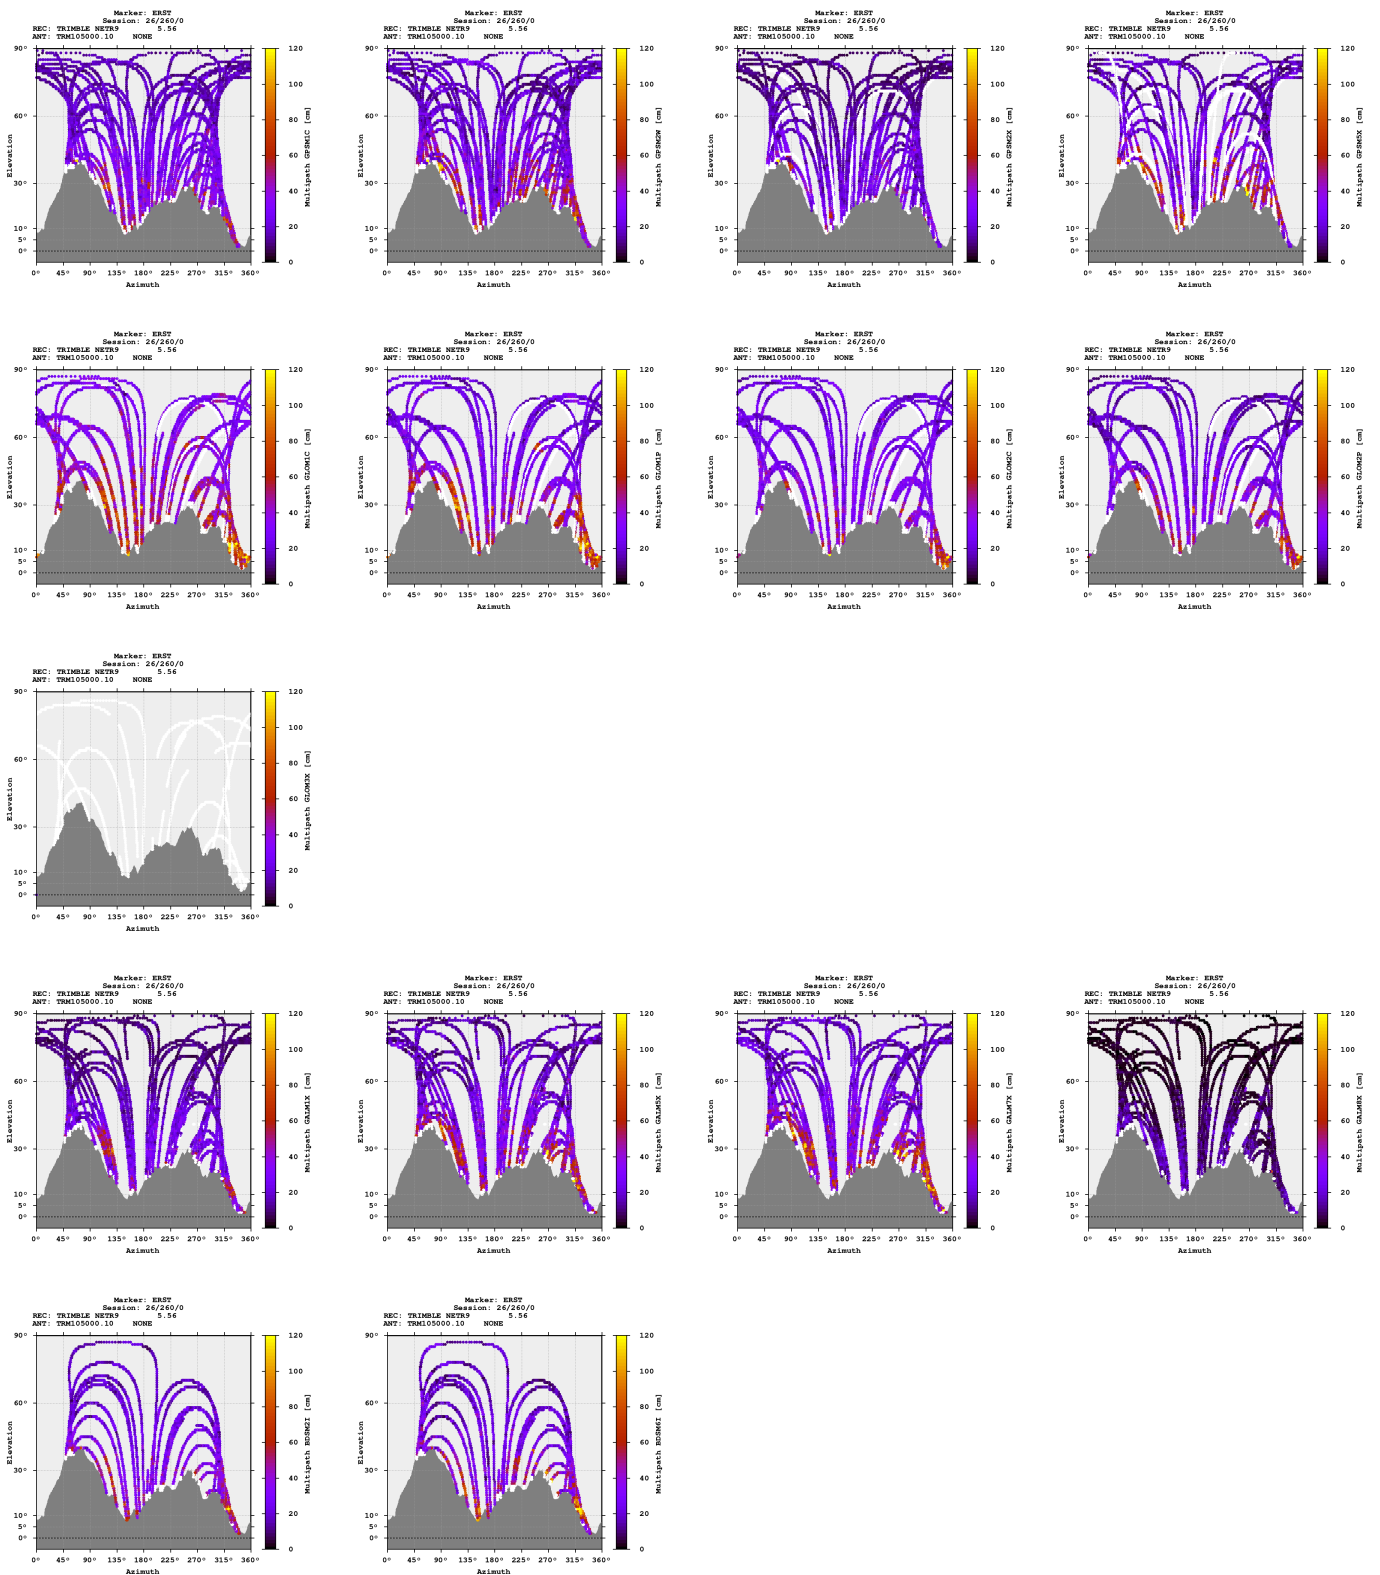


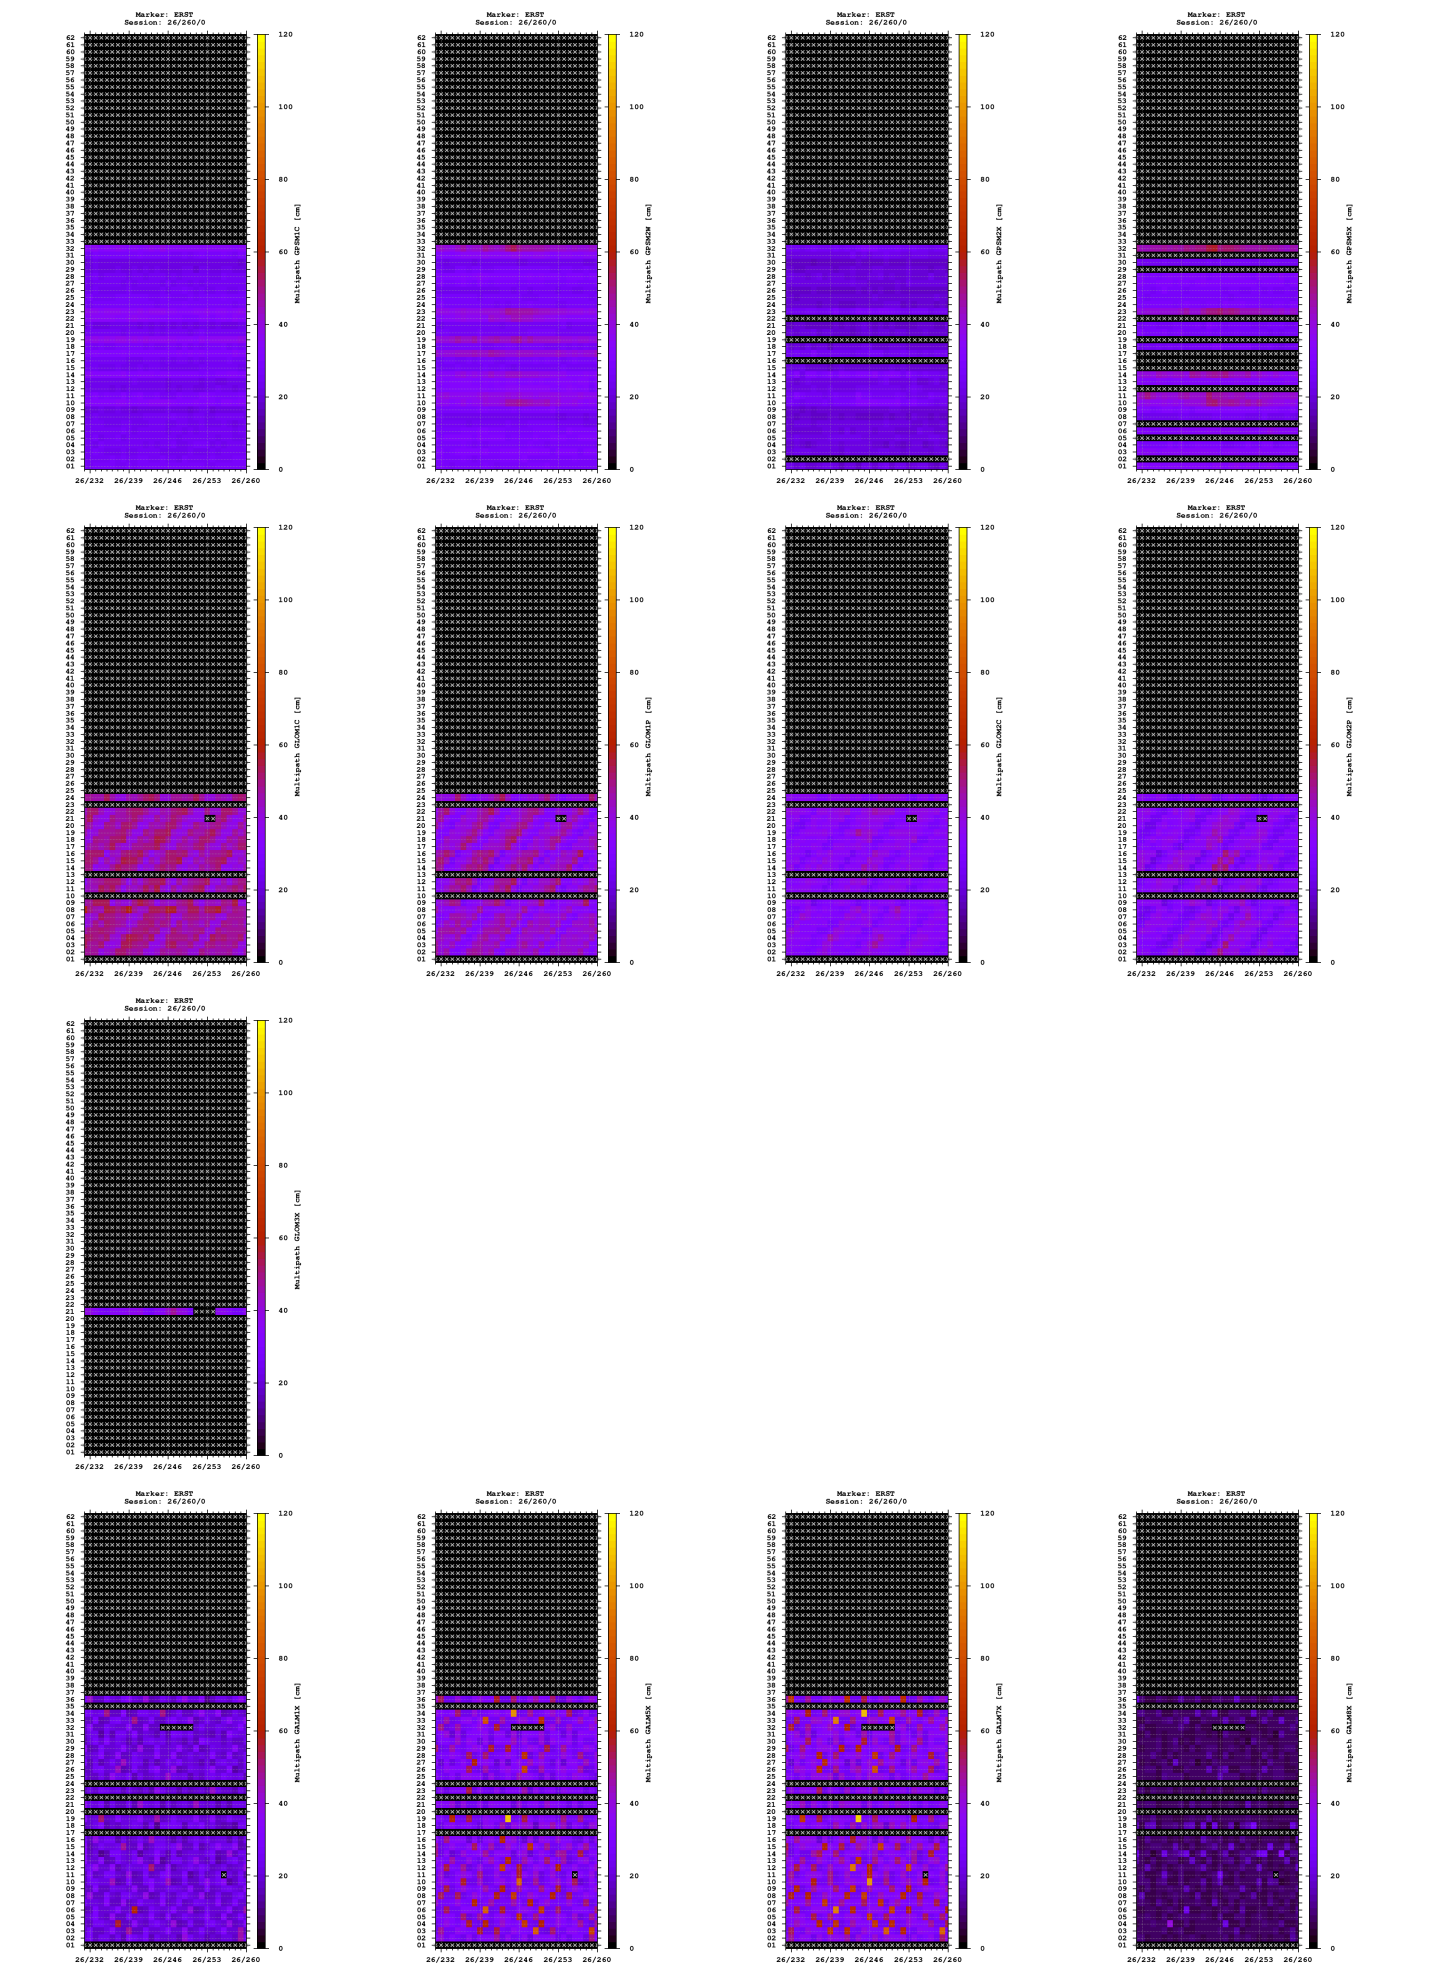


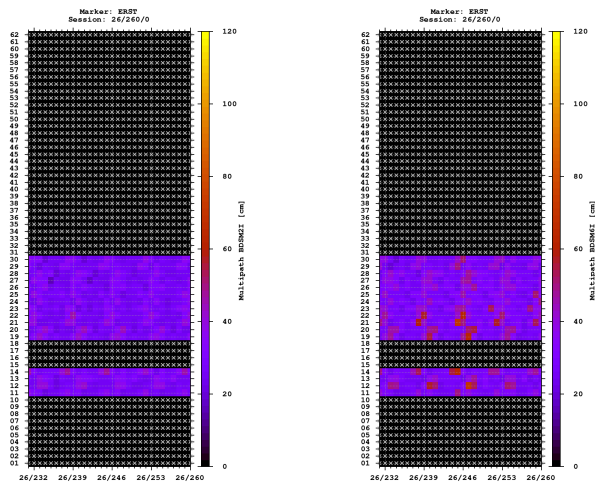


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

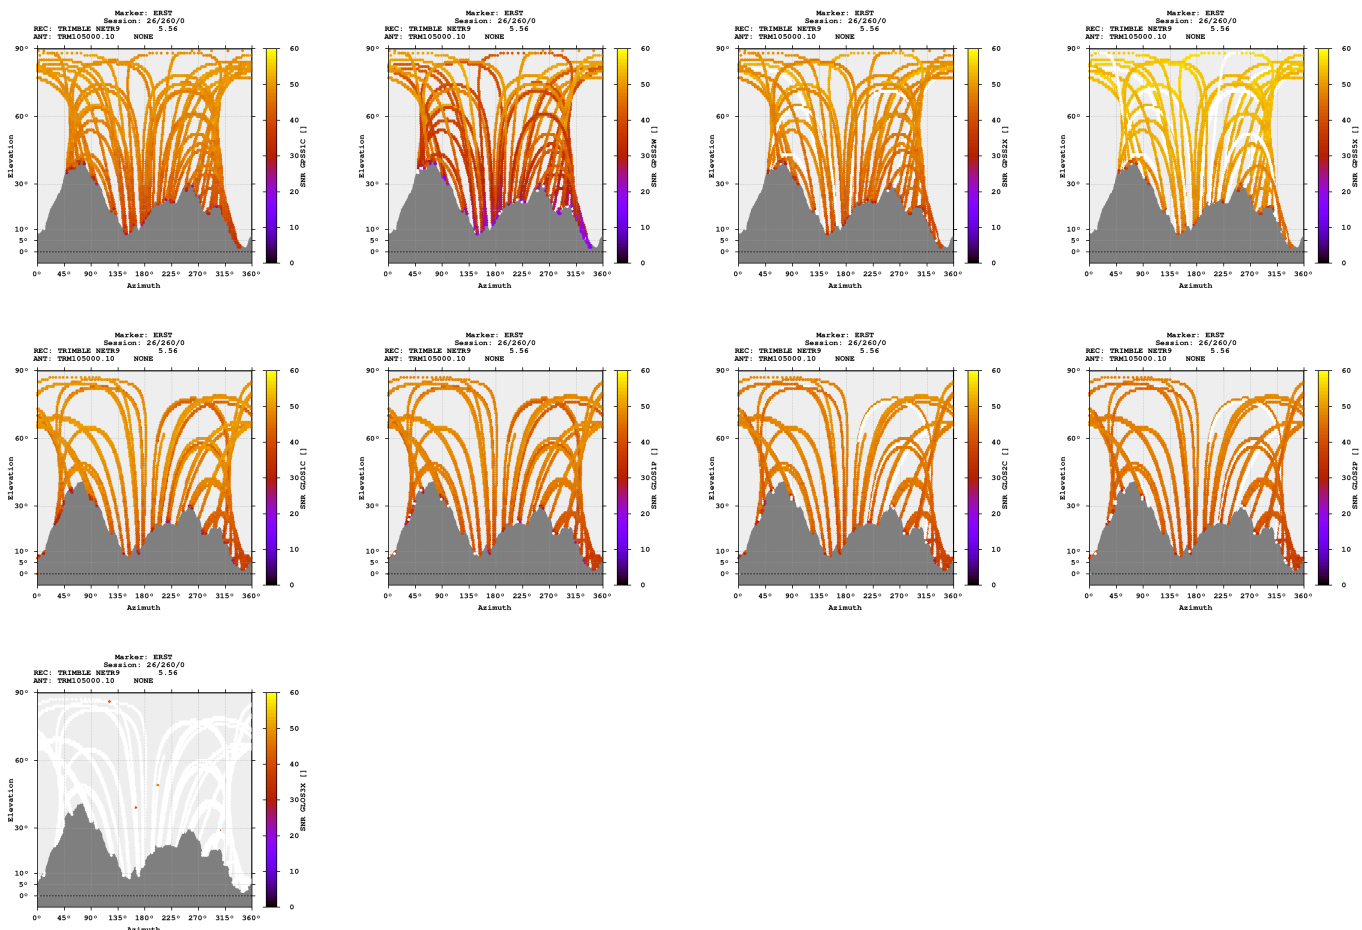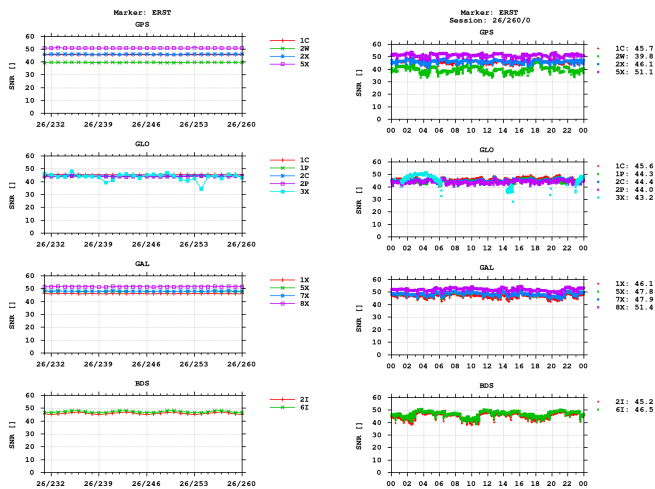


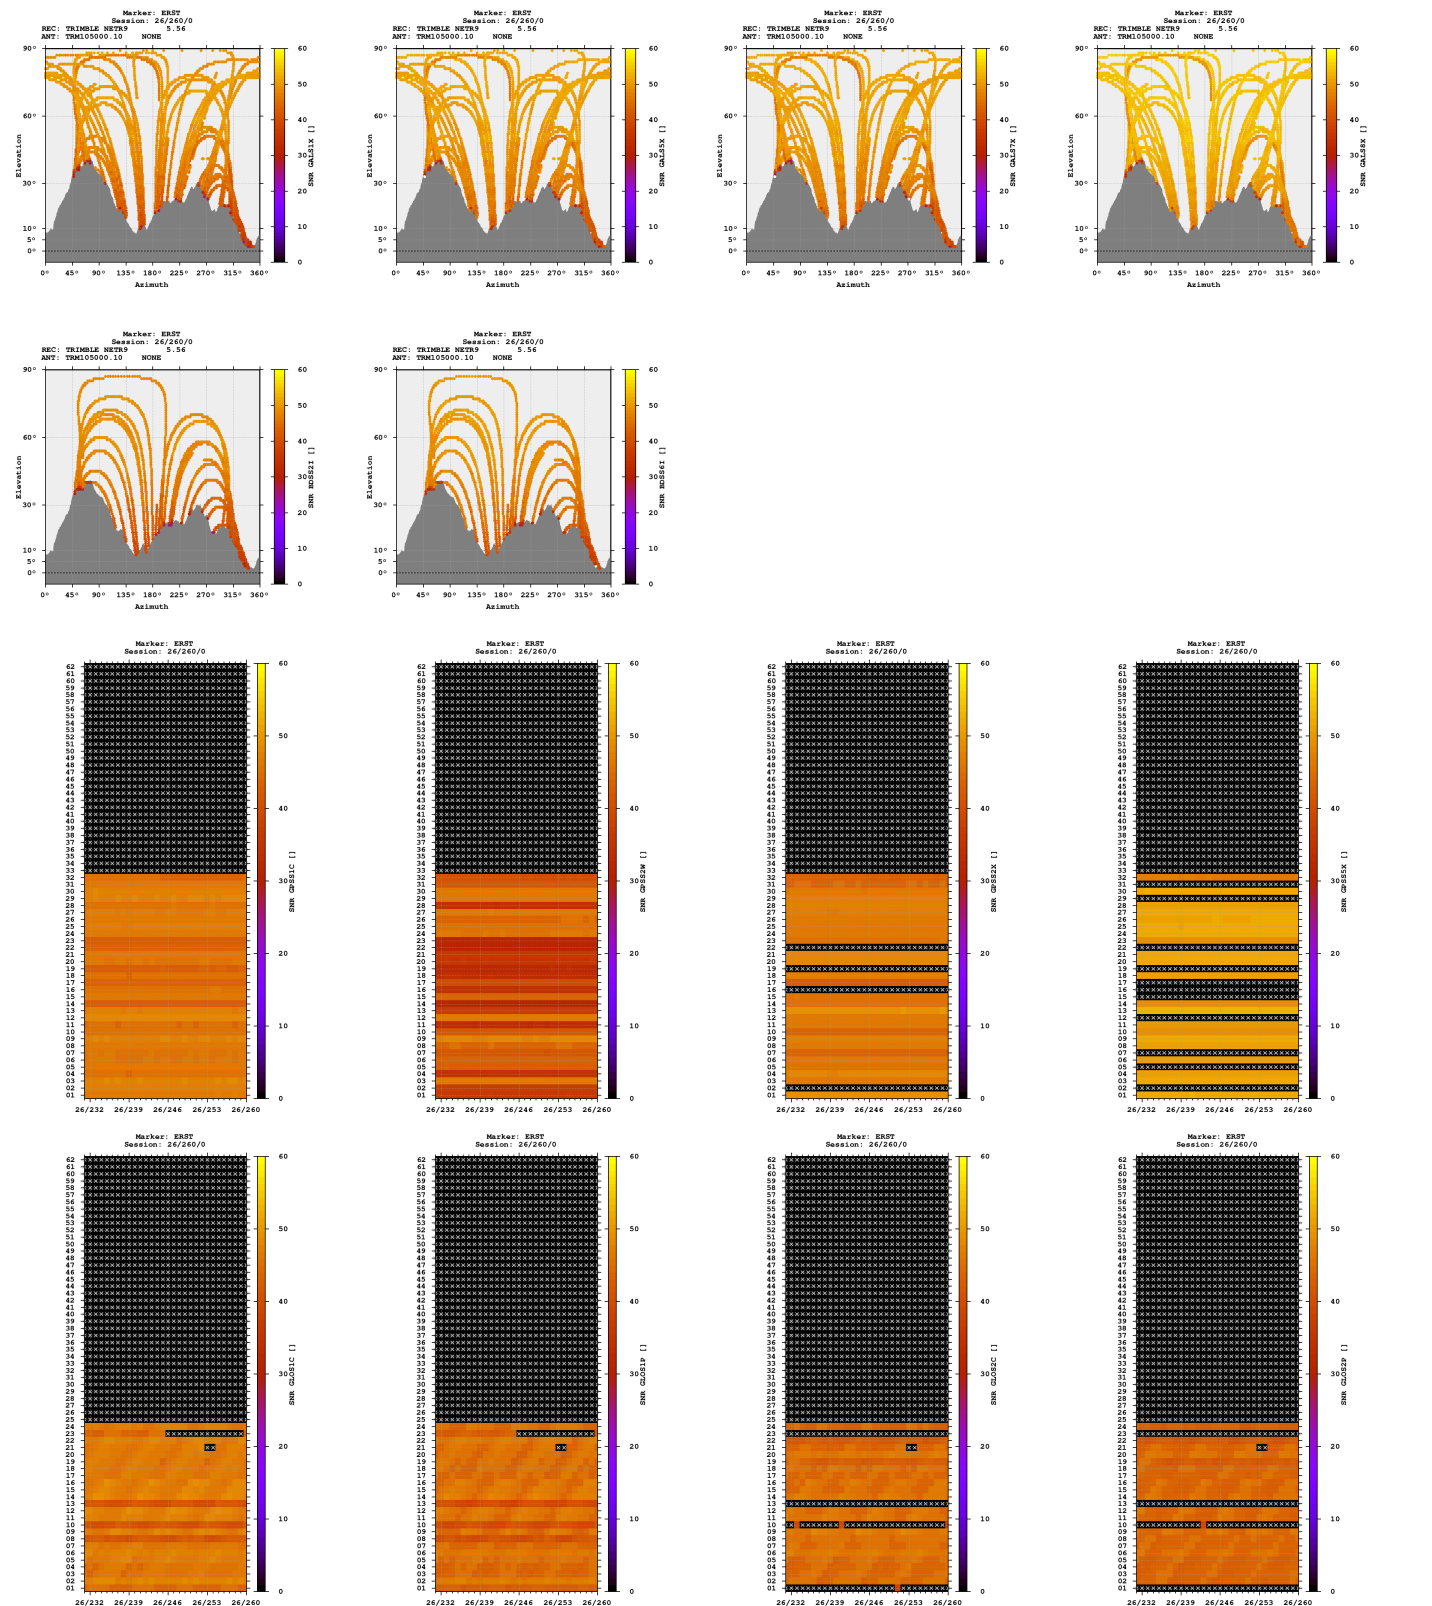

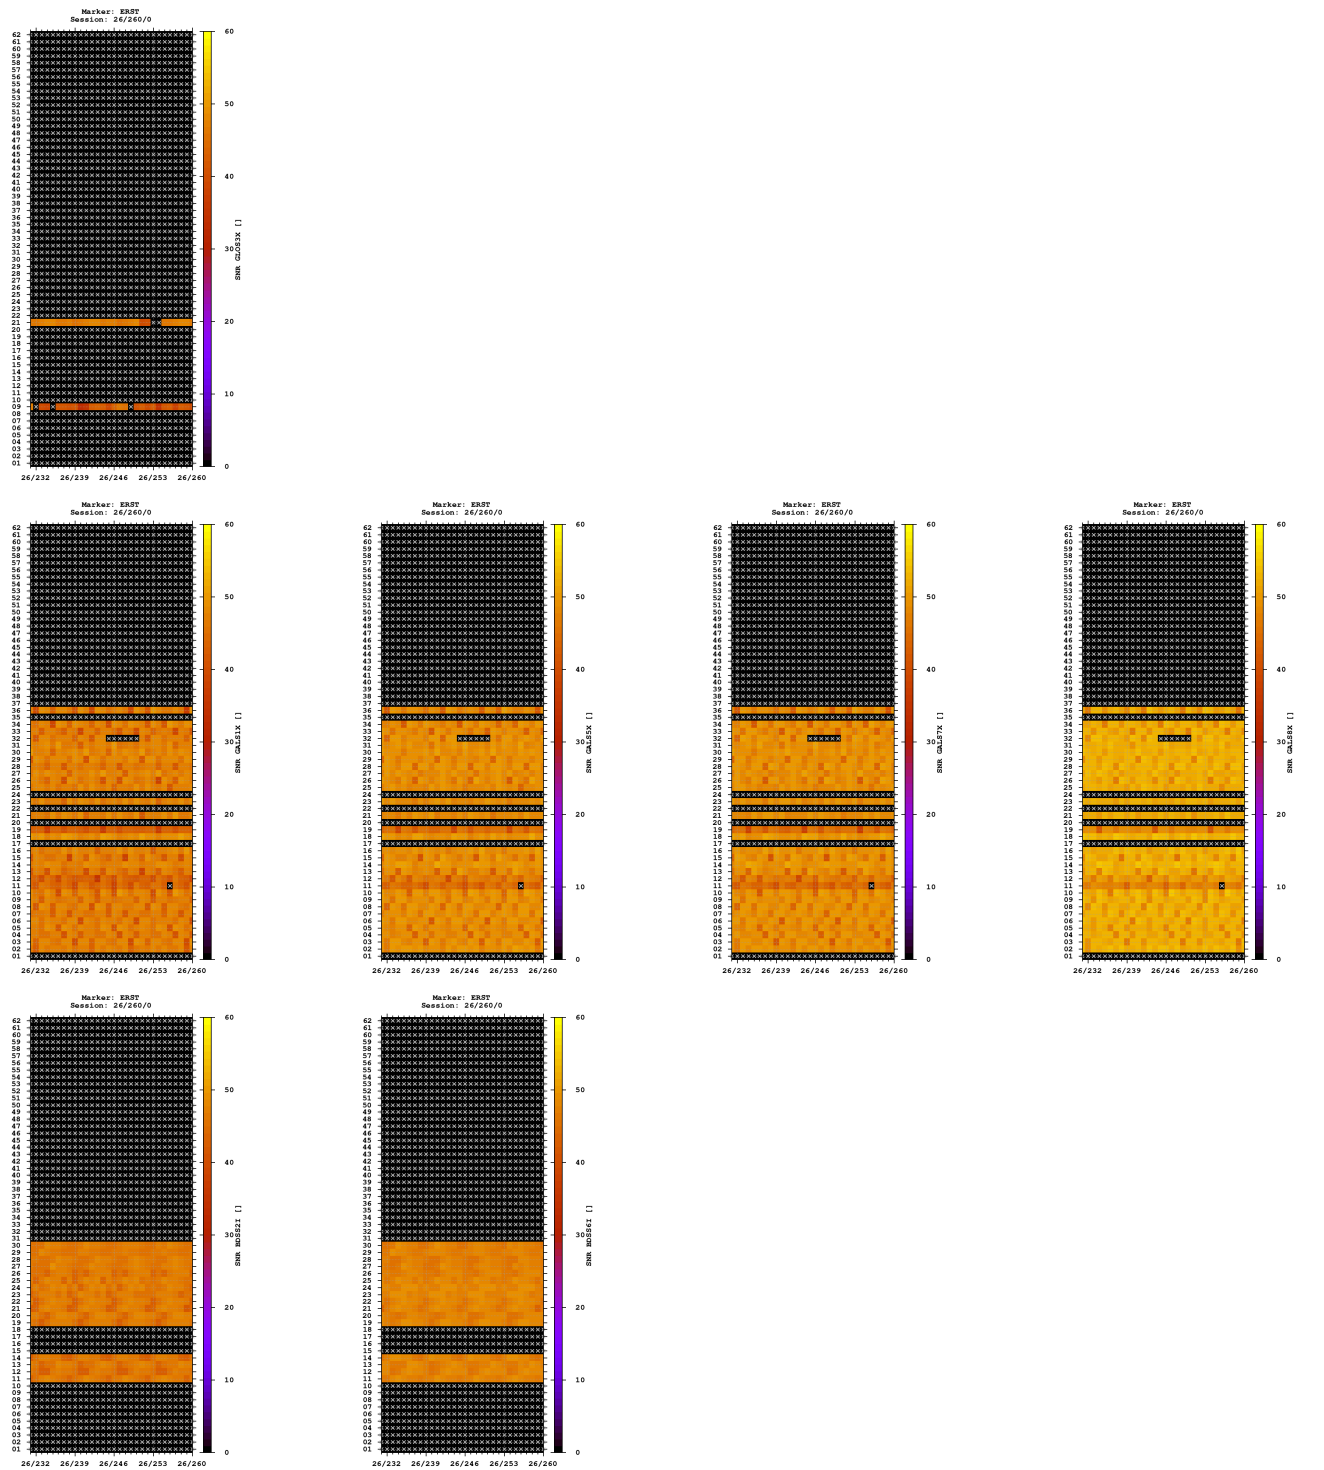

Estimates

2026-09-17 00:00:00	GPS	4322020.2780	656932.4078	4629417.7138	46.832340695	8.642612438	526.9212
2026-09-17 00:00:00	GLO	4322021.9857	656932.1826	4629420.1271	46.832344692	8.642606157	529.8133
2026-09-17 00:00:00	GAL	4322019.9690	656932.1690	4629417.6380	46.832342752	8.642610593	526.4889
2026-09-17 00:00:00	BDS	4322021.4068	656931.2918	4629417.0161	46.832330181	8.642595754	527.0611

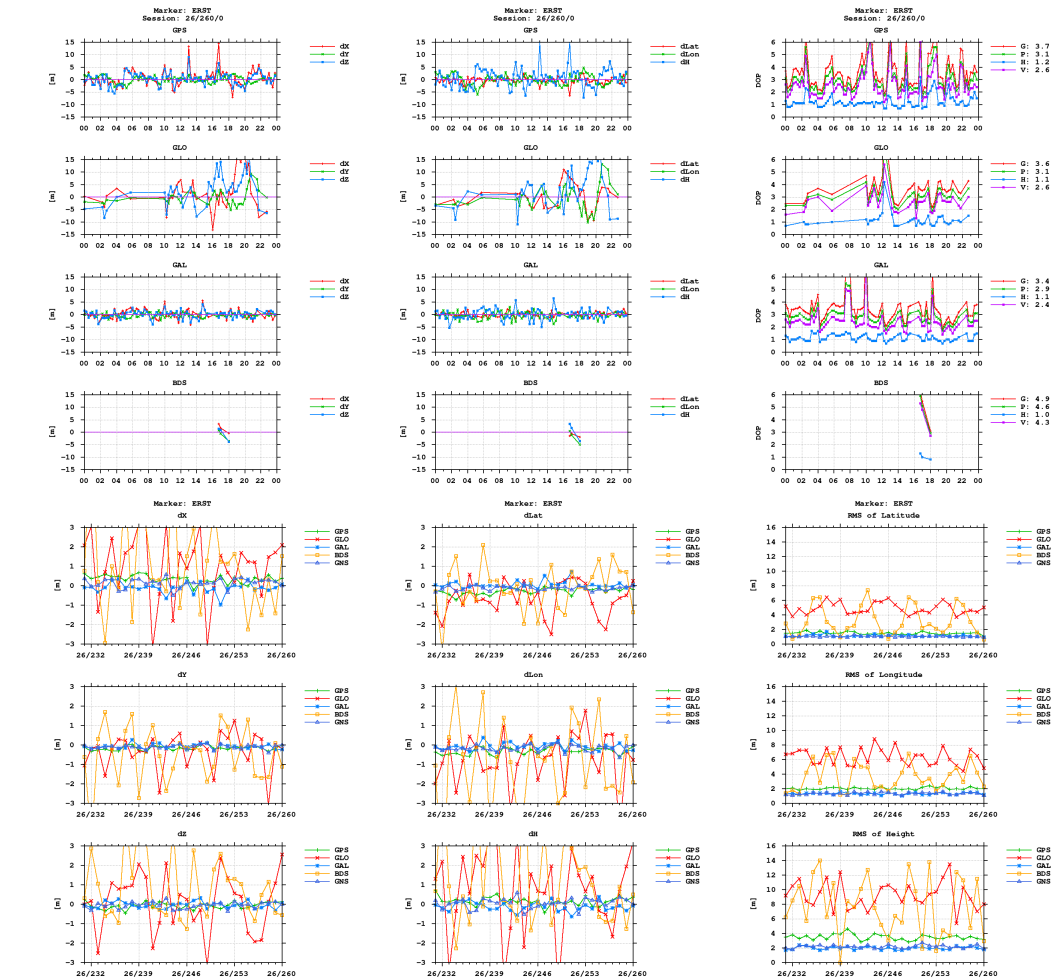

Equipment

2026-08-19 00:00:00 TRIMBLE NETR9 5.56 5433R492

Program info

G-Nut/Anubis Free [3.11] Apr 2 2026 20:39:38 (Rev: 4828)