

GNSS observation file monitoring for FLDK

Last RINEX file: FLDK1970.25D.Z


RINEX version: 3.03

Marker: FLDK

Receiver: 1705289 LEICA GR30 4.82.263

Antenna: 09500002 LEIAR25.R3 LEIT


Epochs

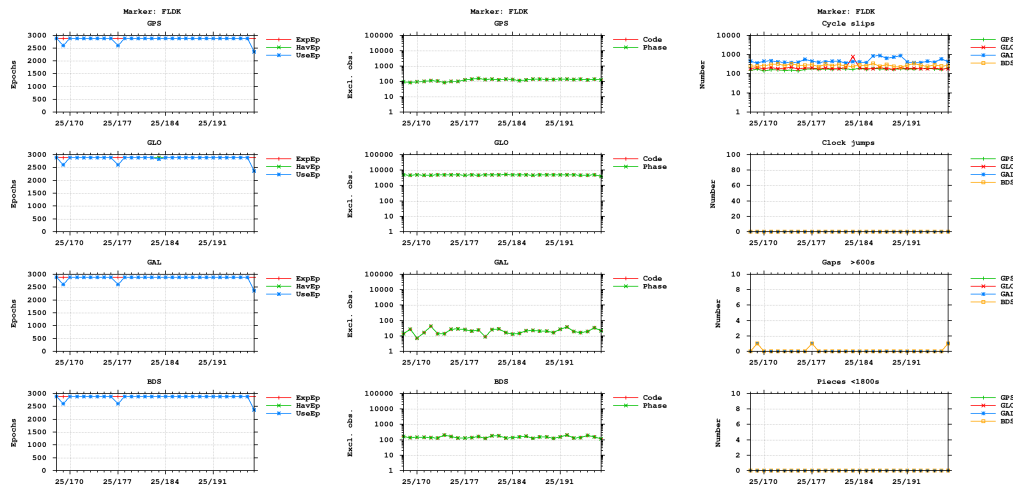


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

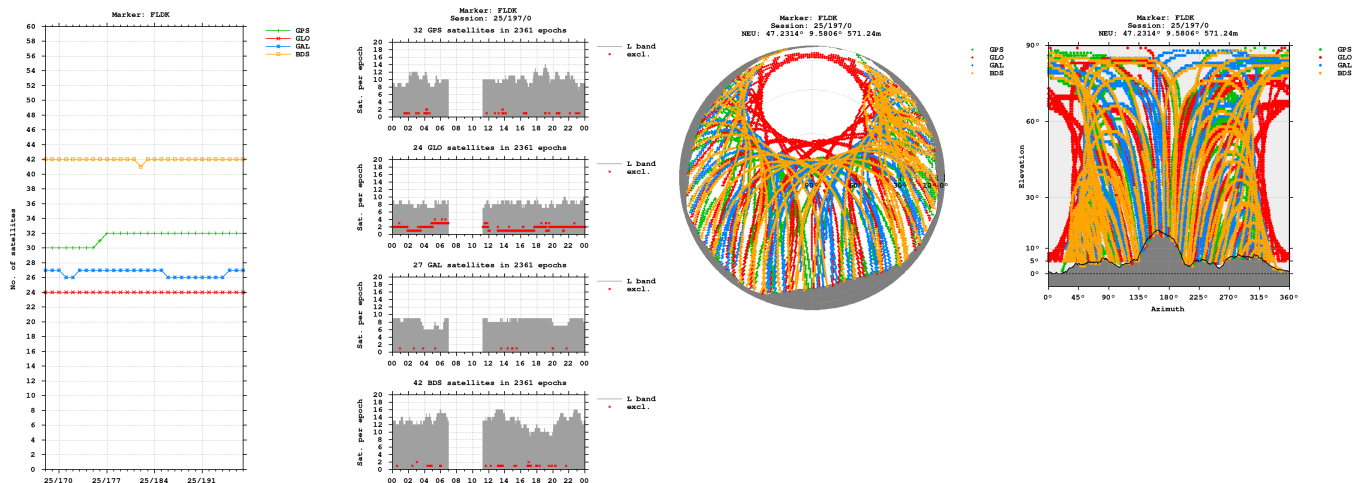


Bands

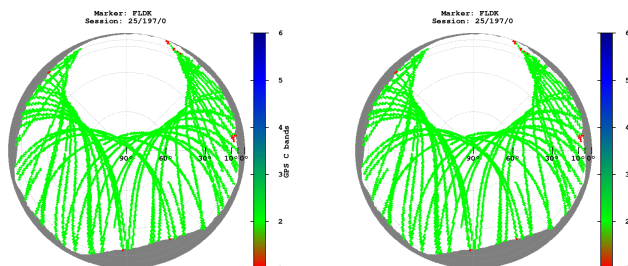

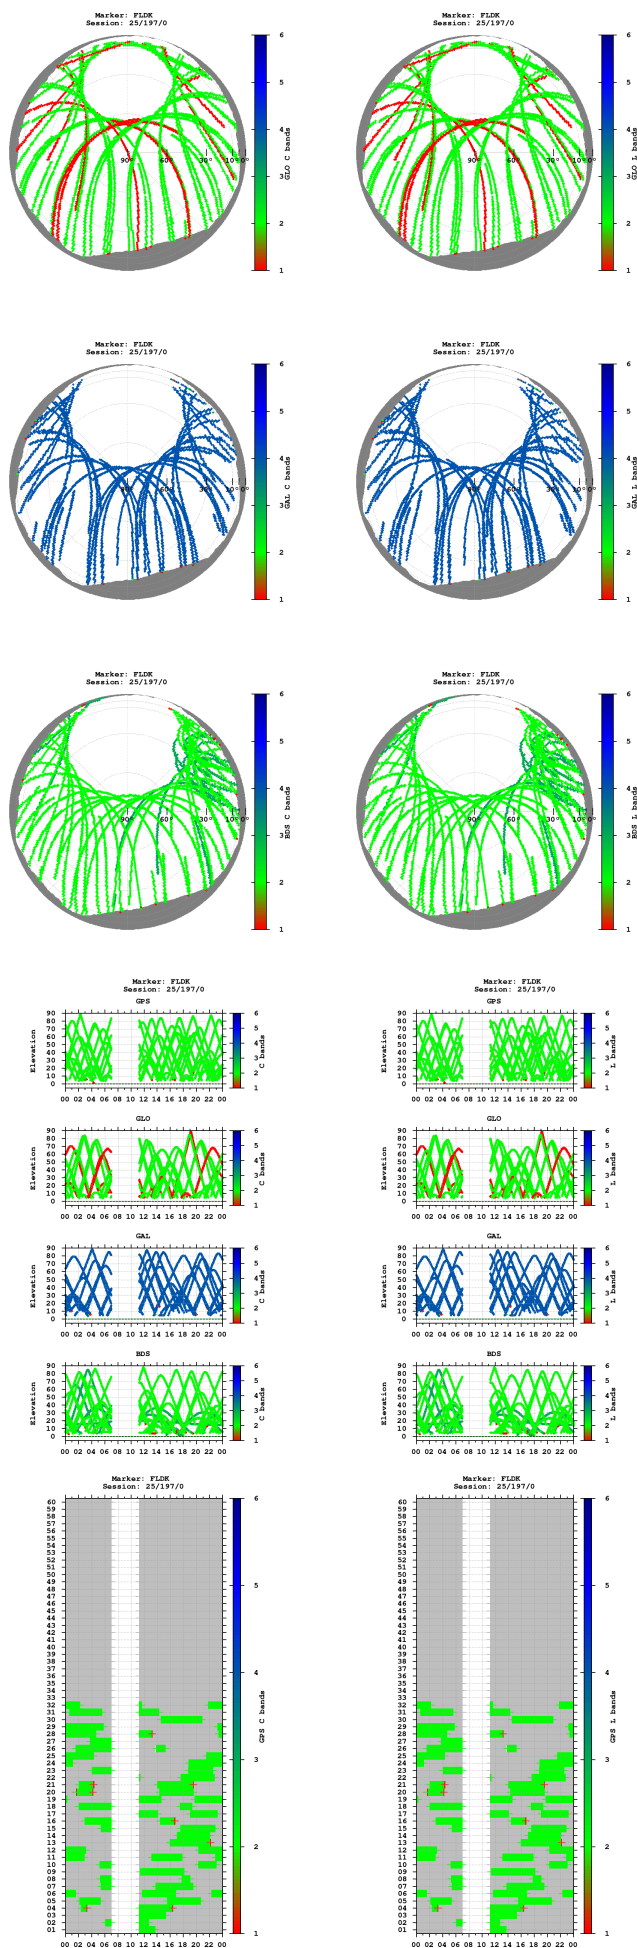


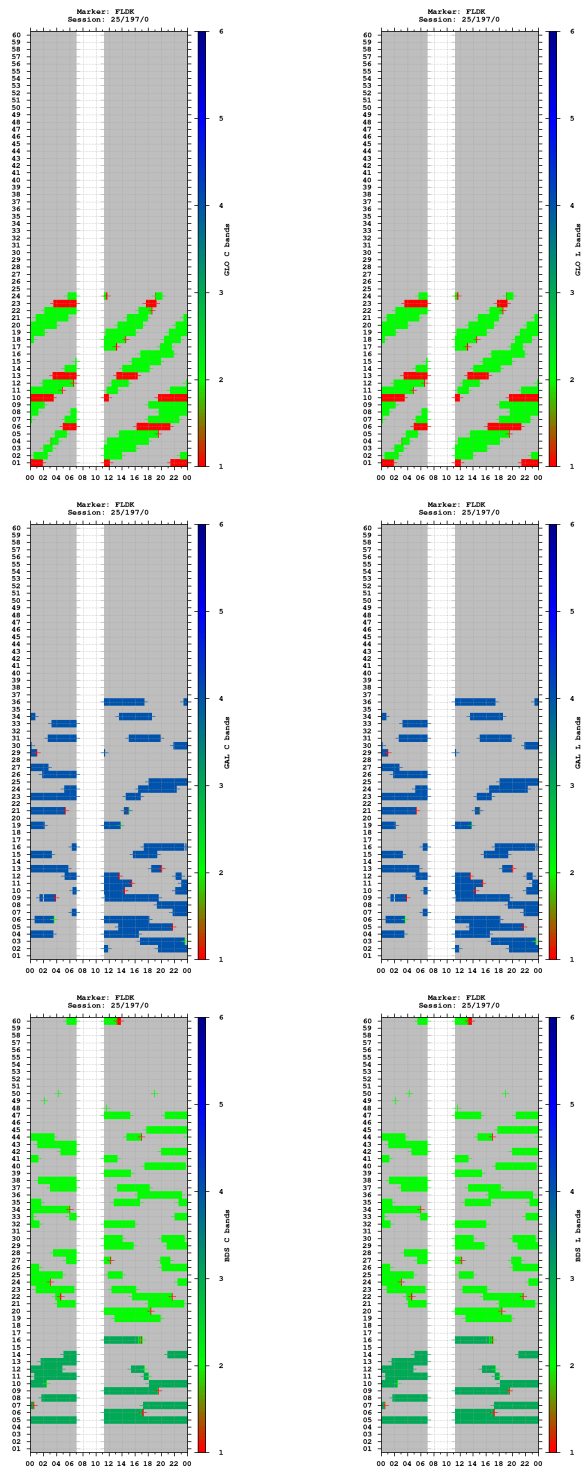


Observations

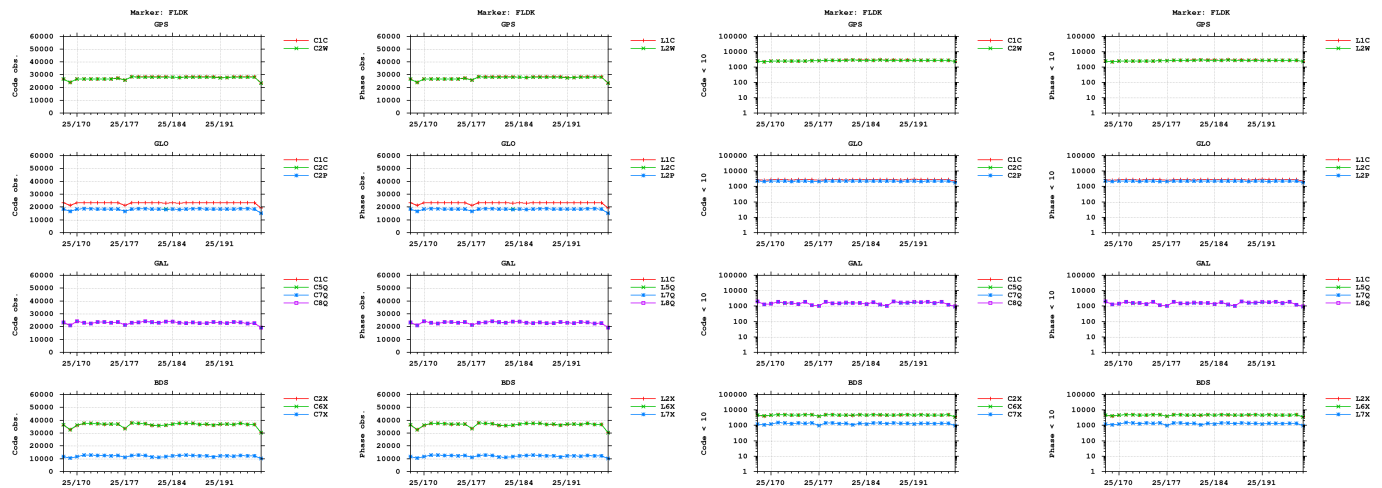



Cycle slips

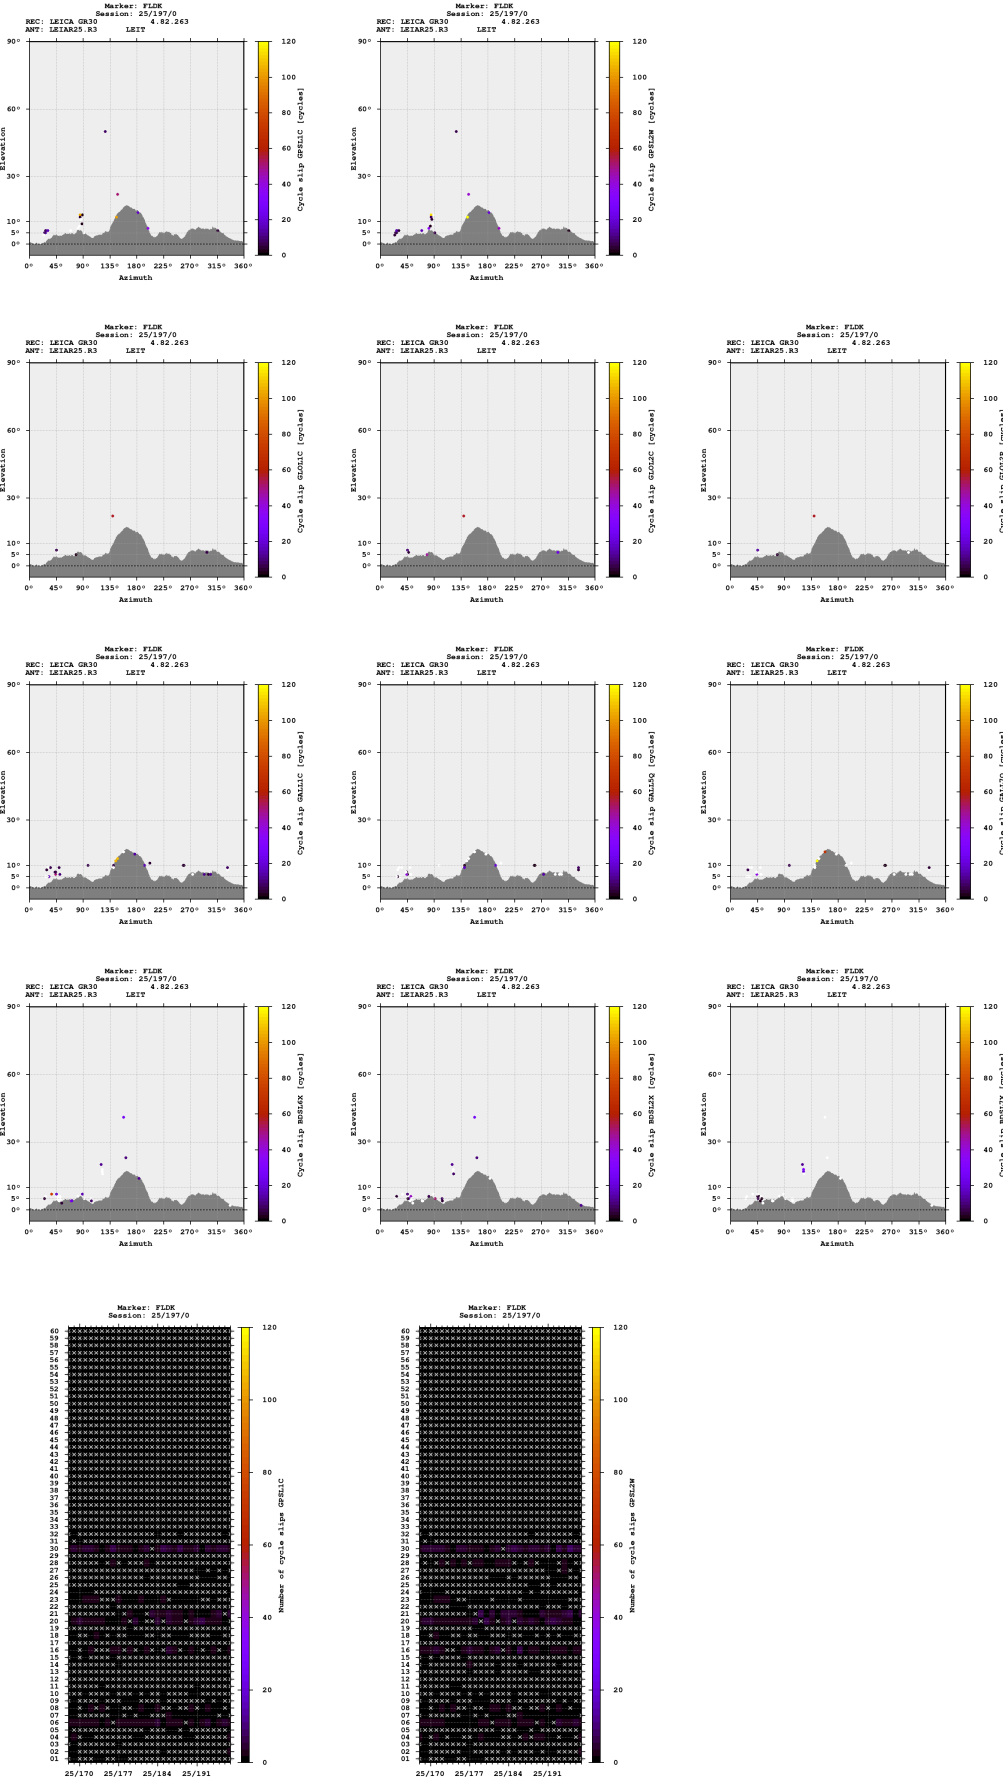


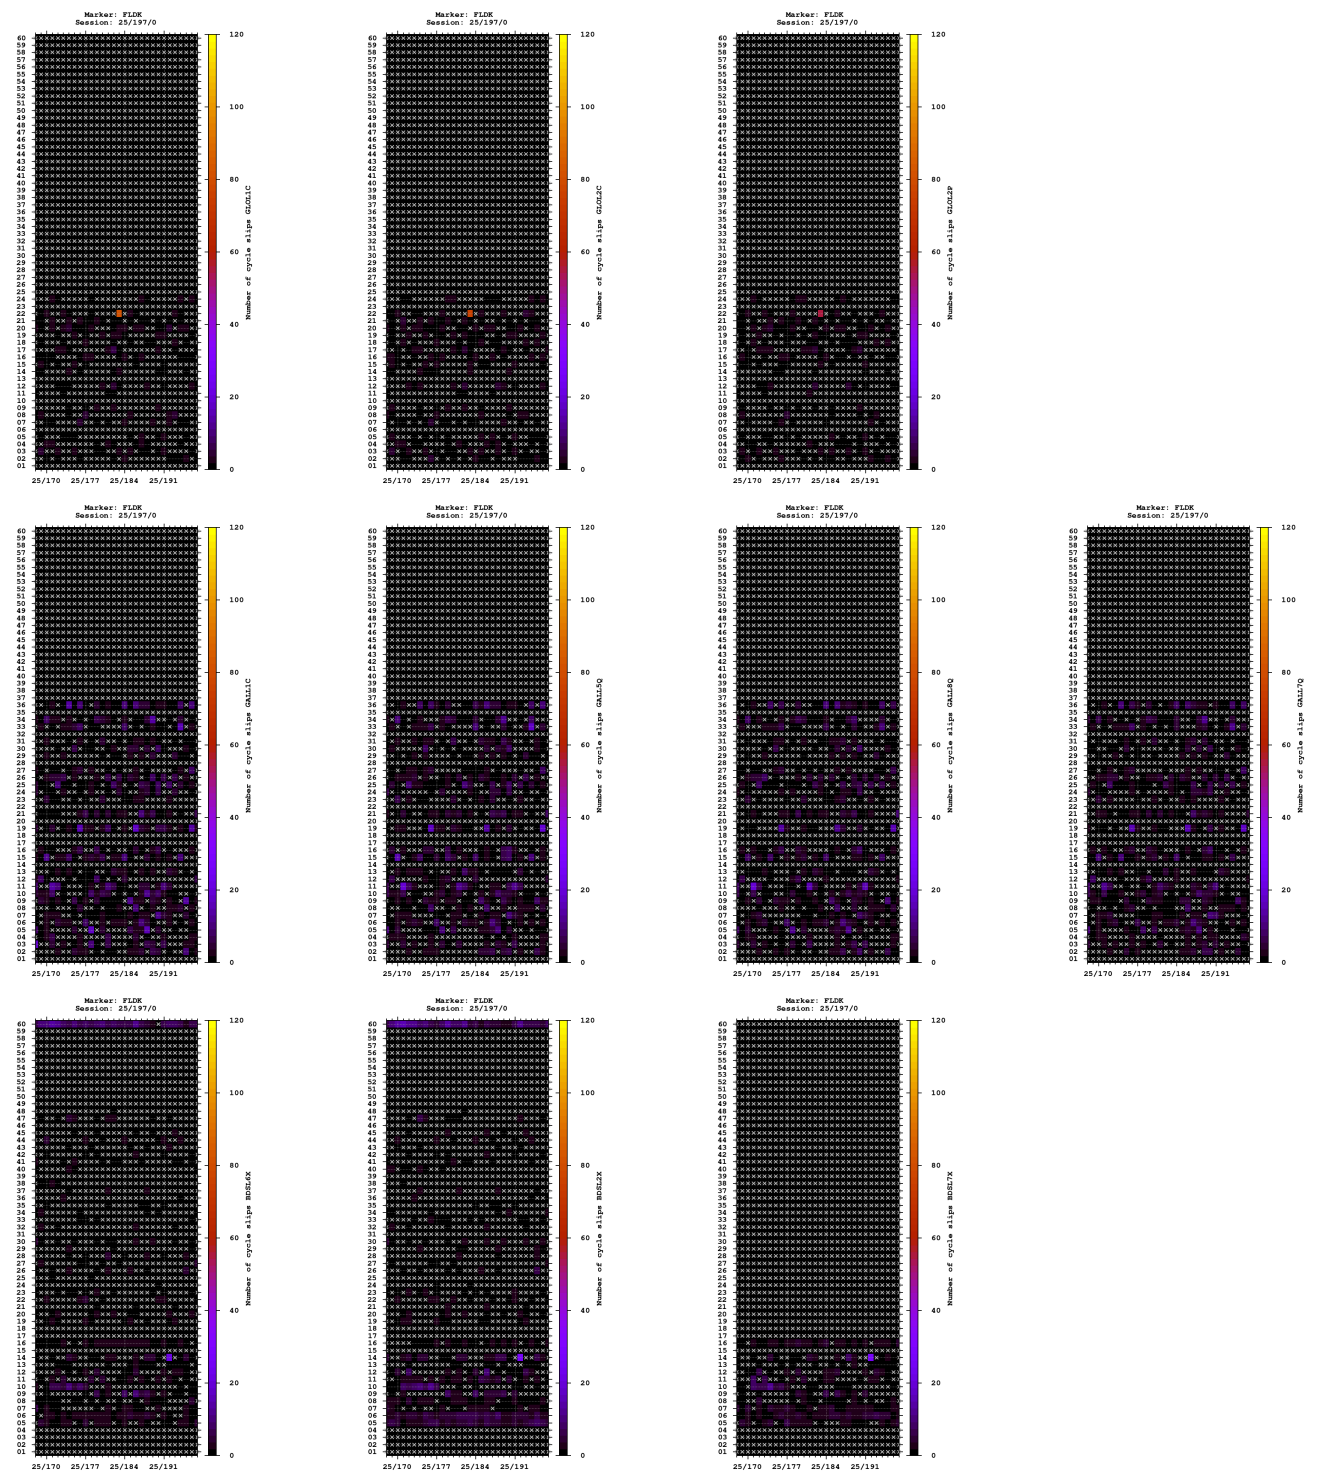

Multipath

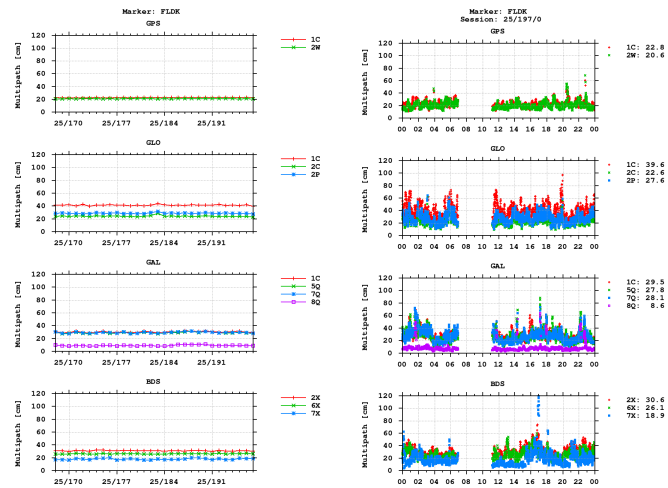


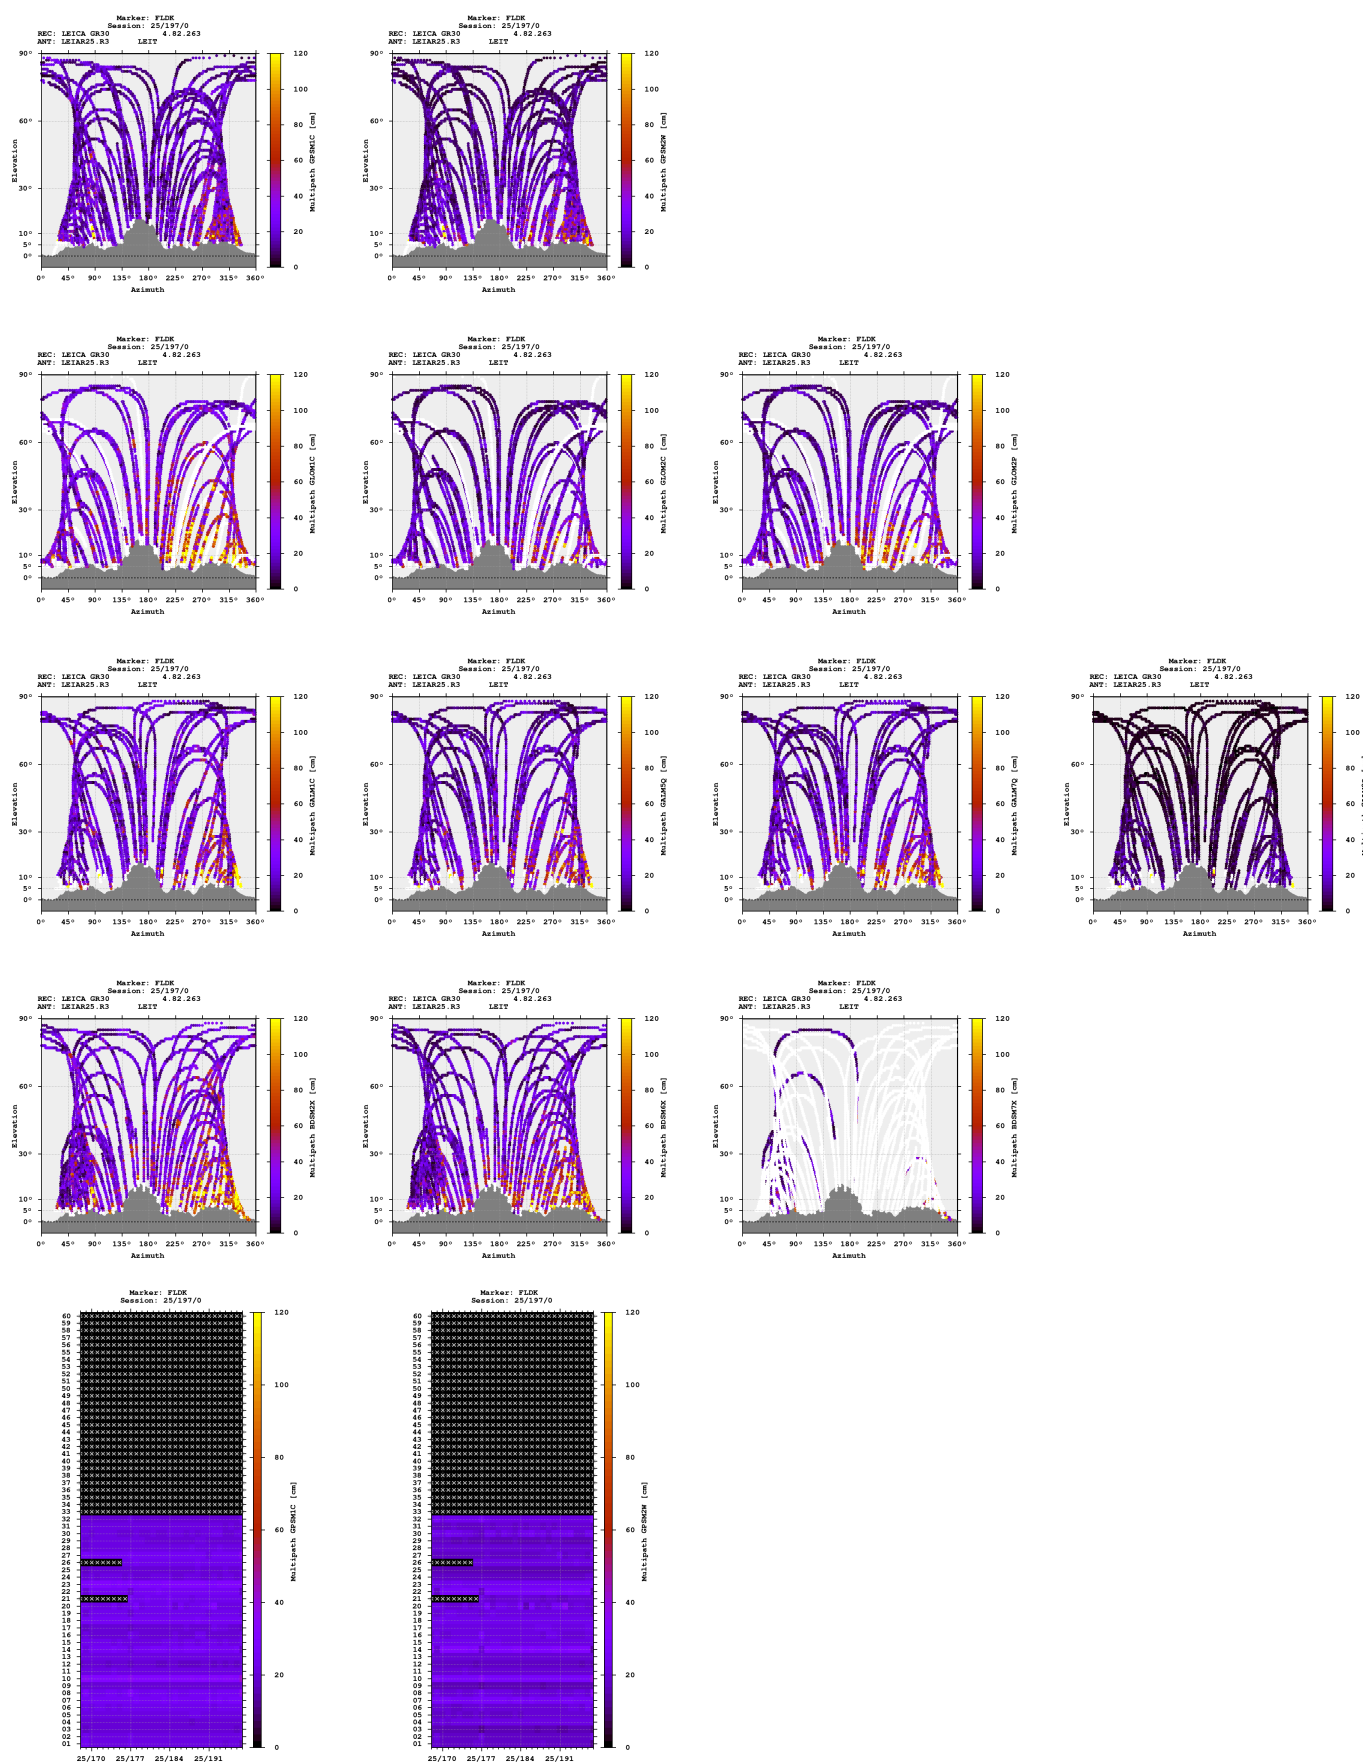


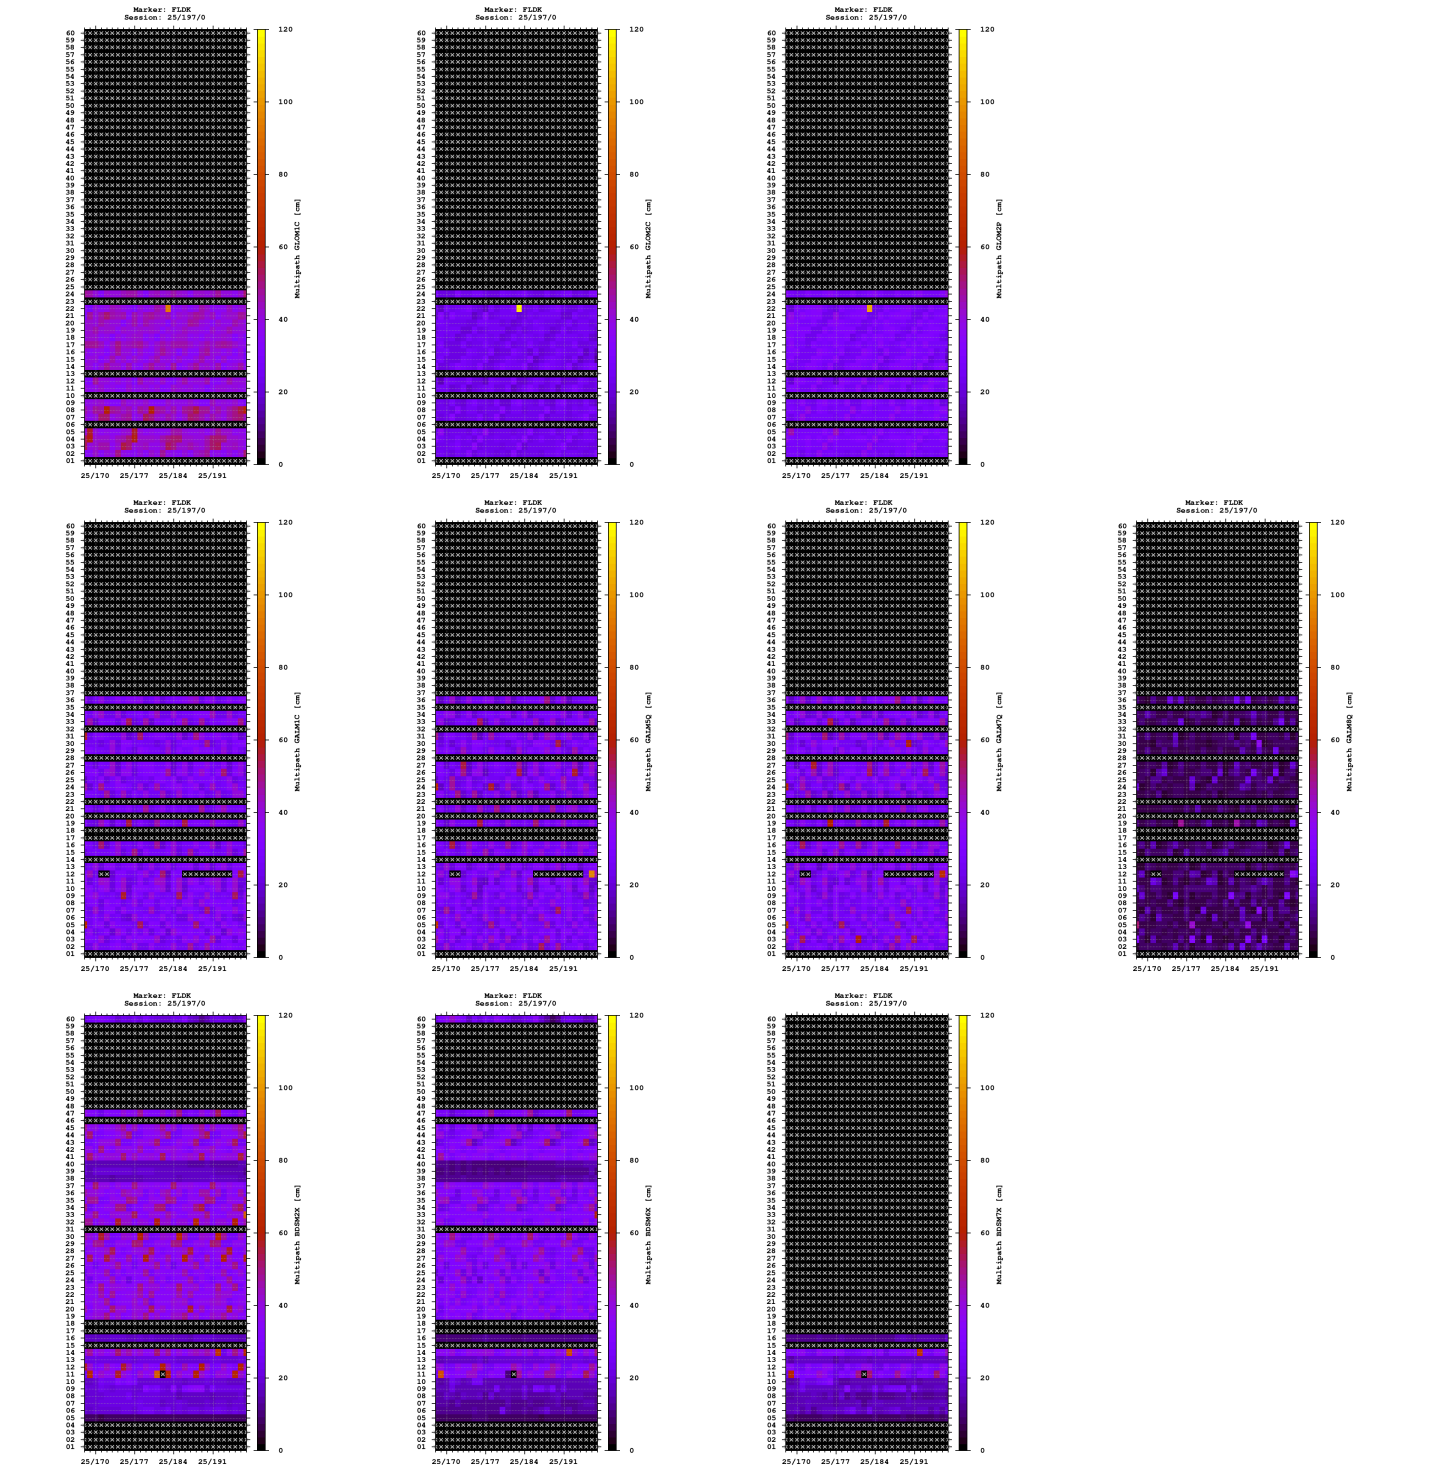

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

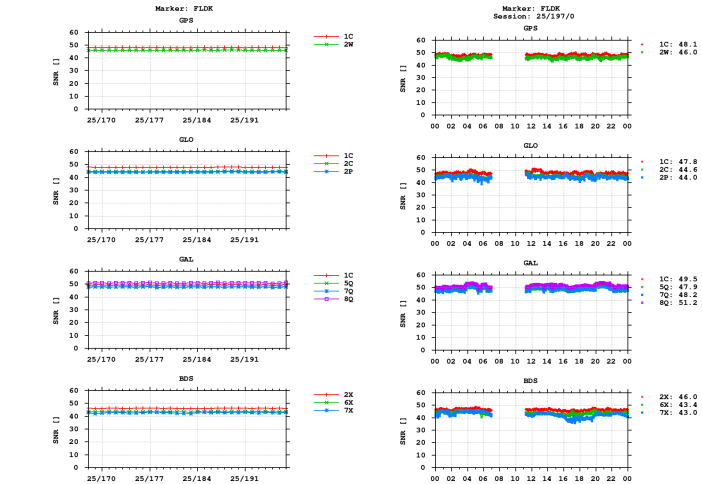

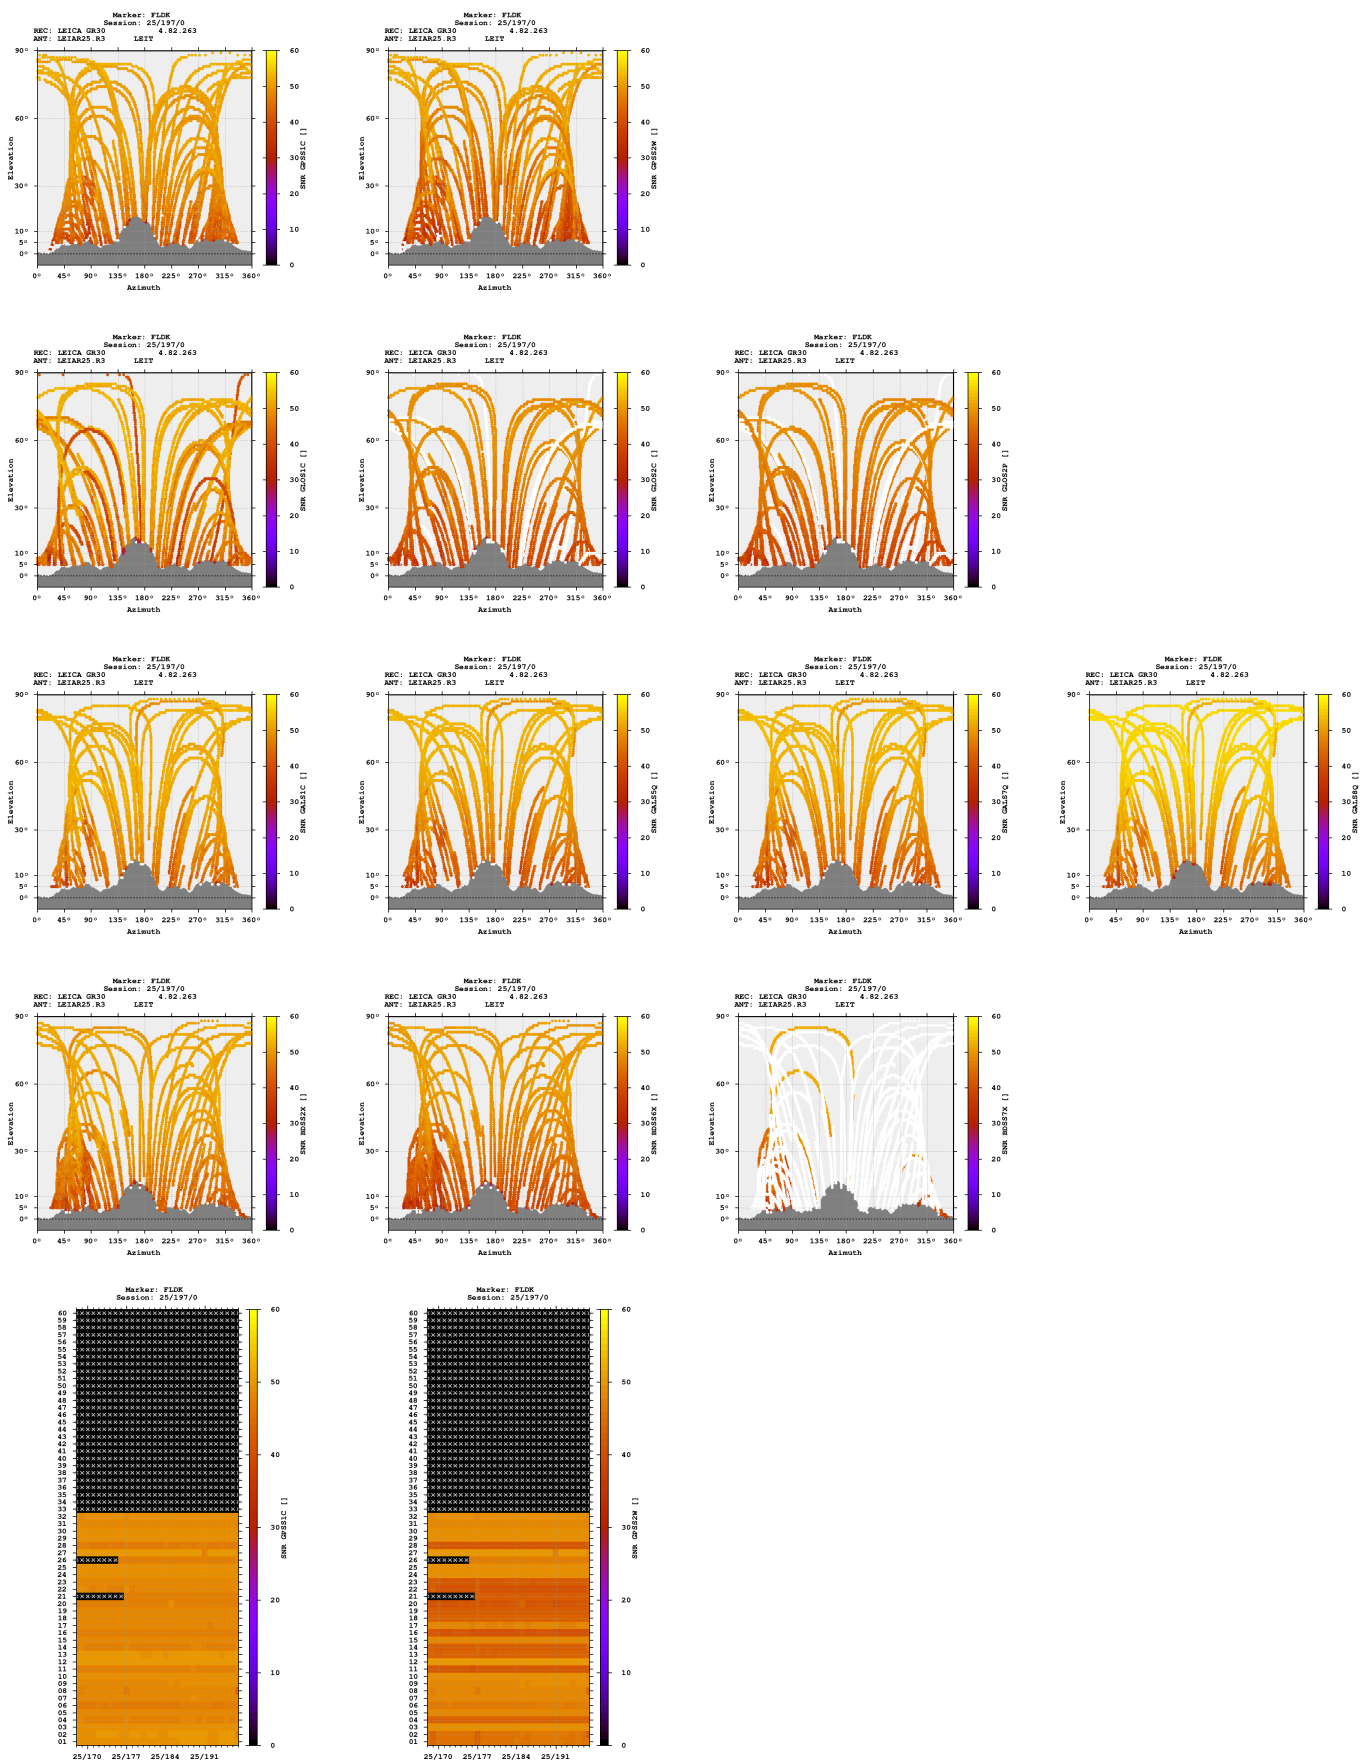



2025-07-16 00:00:00	GPS	4278708.1035	722199.8462	4659687.0882	47.231350656	9.580608385	571.2386
2025-07-16 00:00:00	GLO	4278708.0115	722199.6343	4659687.5391	47.231354242	9.580605828	571.4841
2025-07-16 00:00:00	GAL	4278708.3484	722199.7133	4659687.0216	47.231349016	9.580606033	571.2566
2025-07-16 00:00:00	BDS	4278708.1867	722199.1730	4659687.5824	47.231353872	9.580599437	571.5810



Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)