


GNSS observation file monitoring for IRBE


Last RINEX file: IRBE1100.24D.Z
 RINEX version: 3.04
 Marker: IRBE 10726M001
 Receiver: 1706733 LEICA GR30 4.60/7.811
 Antenna: 09060011 LEIAR25 LEIT

Epochs

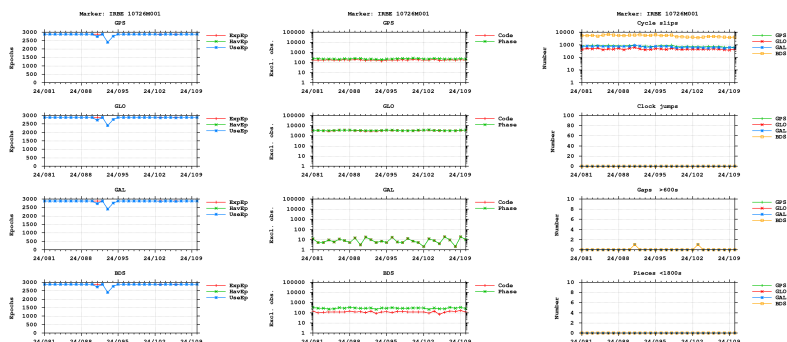



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

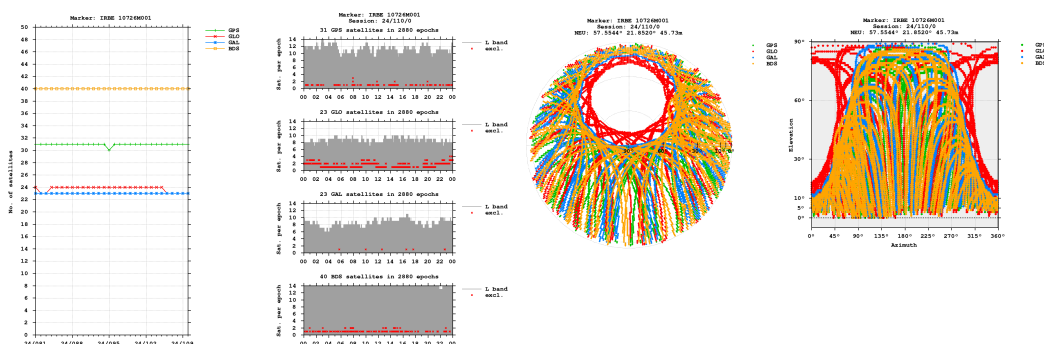


Bands

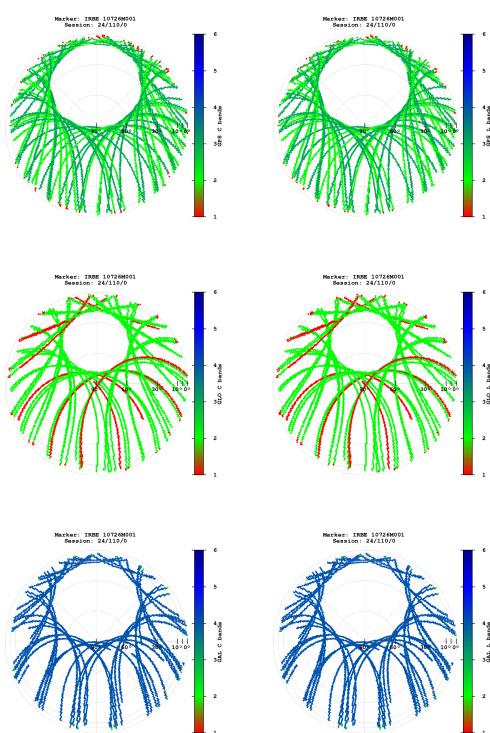


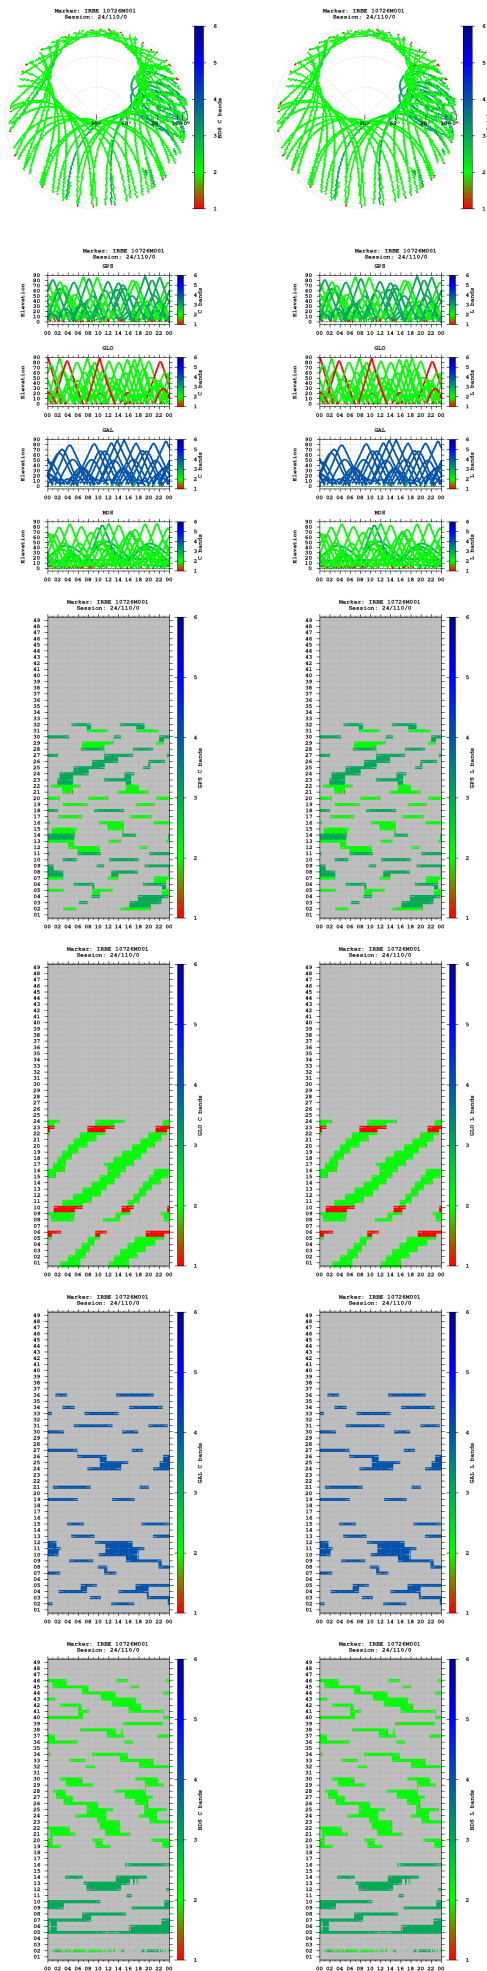


Observations


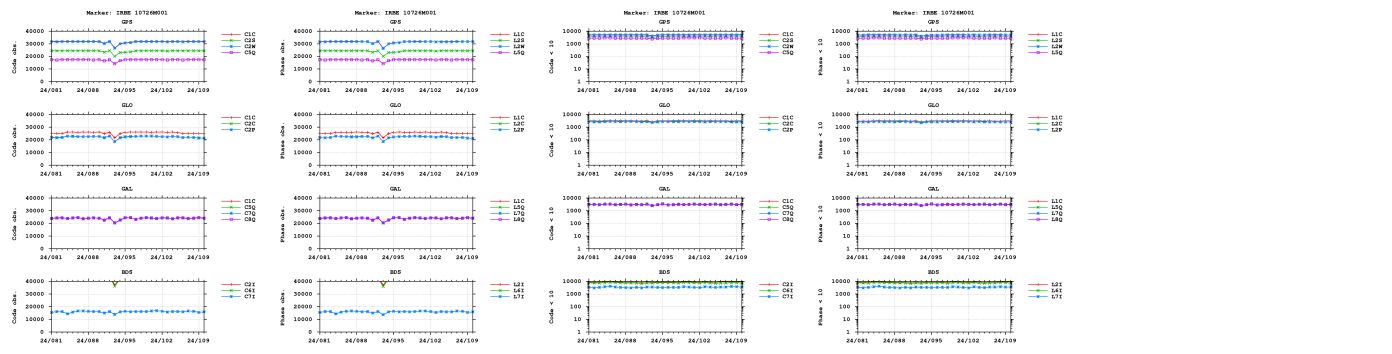



Cycle slips

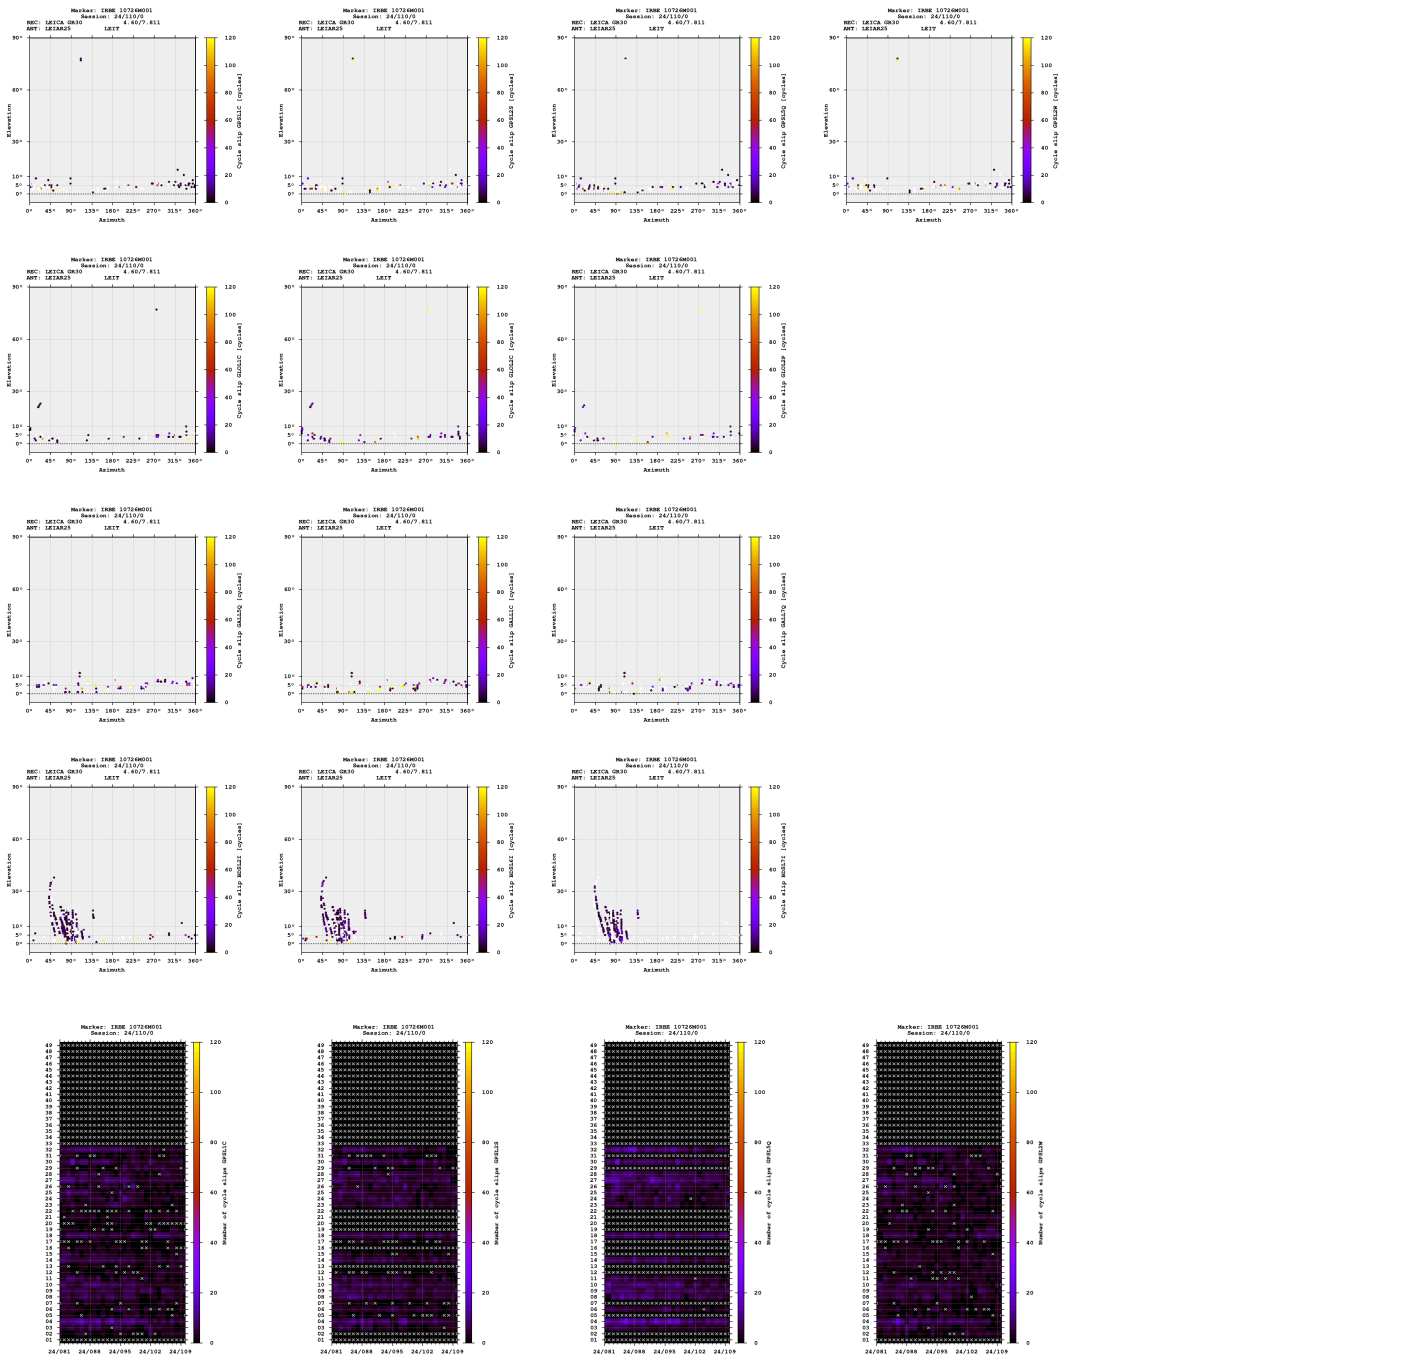

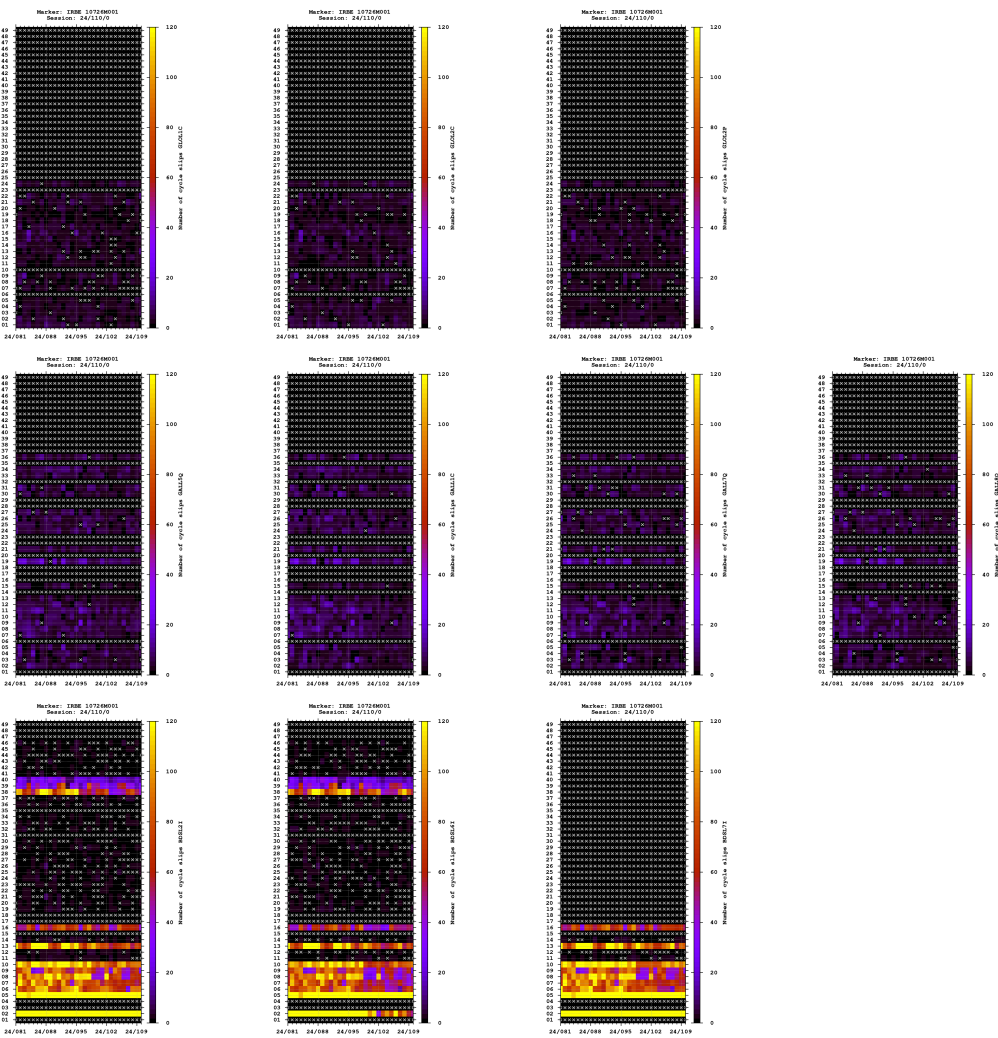


Multipath

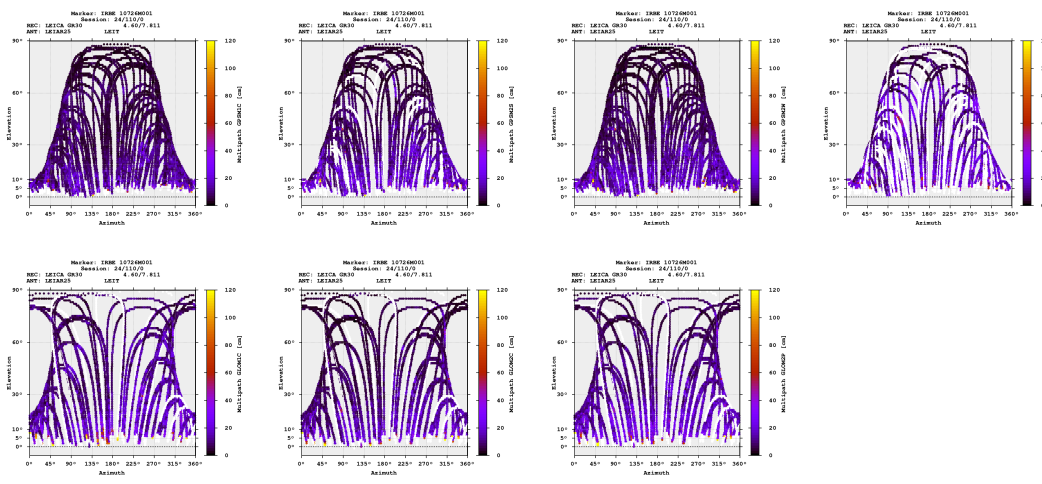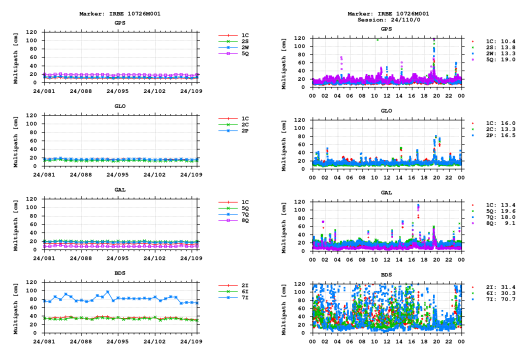


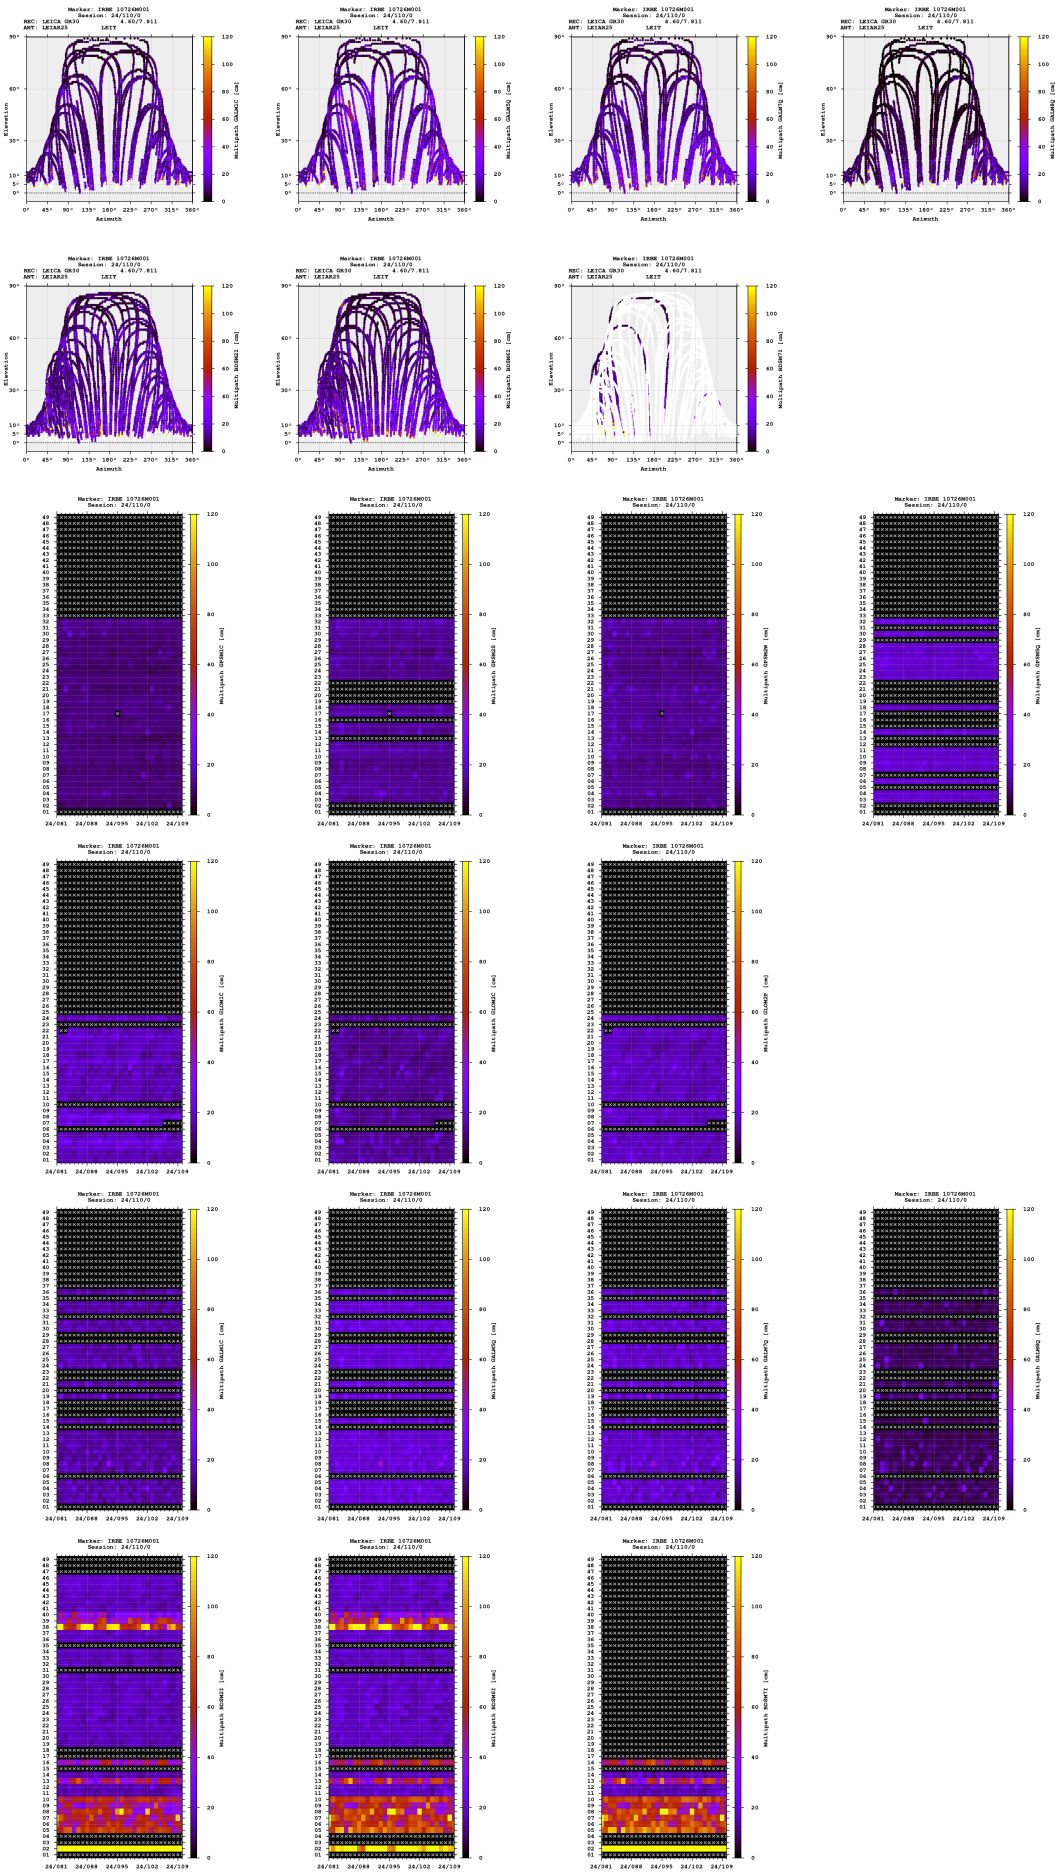

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

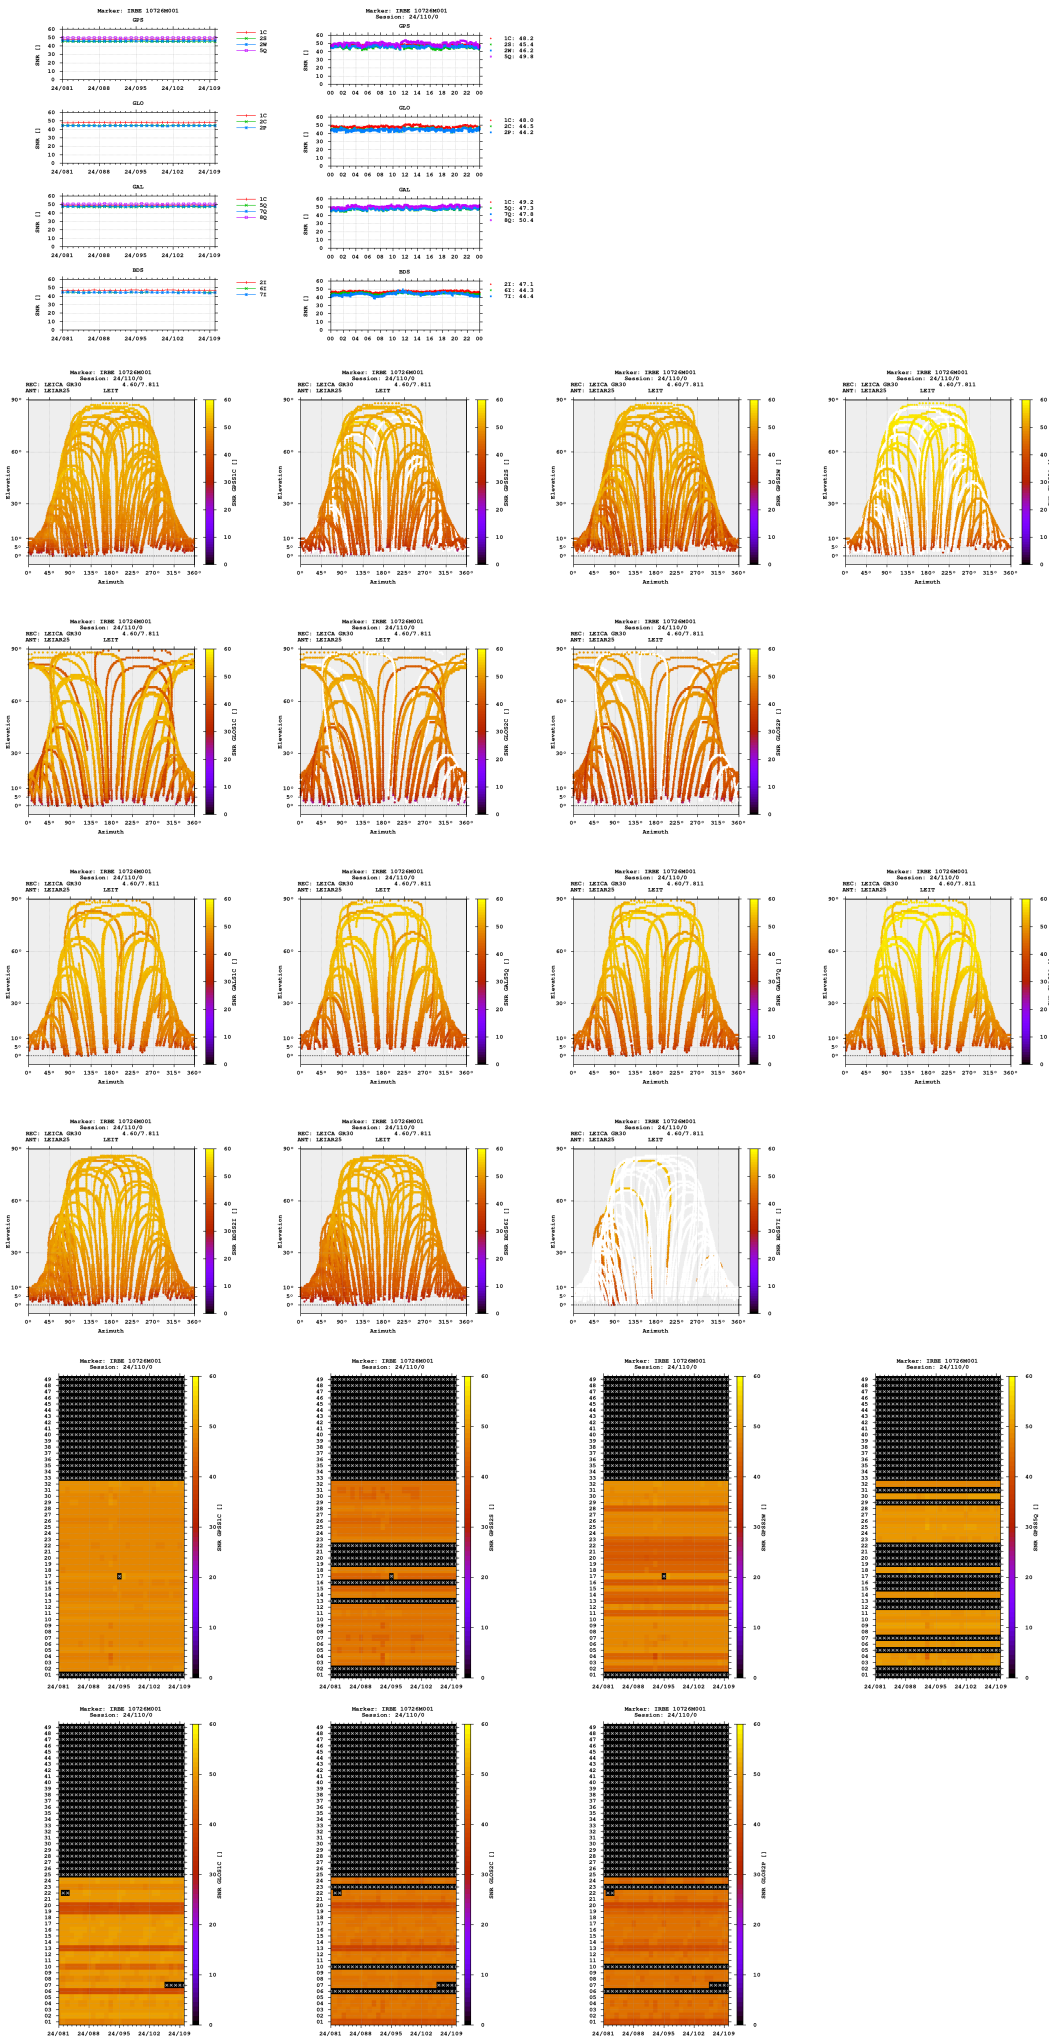

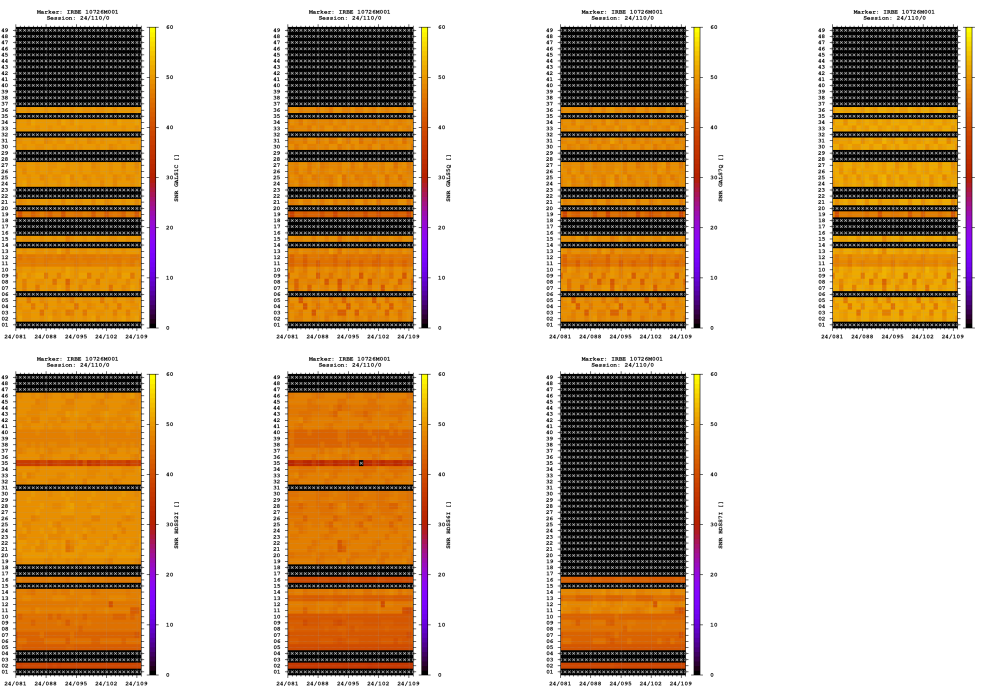

Estimates

2024-04-19 00:00:00	GPS	3183613.7862	1276708.0868	5359315.2235	57.554423152	21.852009446	45.4347
2024-04-19 00:00:00	GLO	3183615.1400	1276707.5594	5359315.6823	57.554417365	21.851992933	46.4659
2024-04-19 00:00:00	GAL	3183614.2561	1276708.0509	5359315.4744	57.554421193	21.852006048	45.9485
2024-04-19 00:00:00	BDS	3183616.4069	1276704.3464	5359311.5160	57.554397446	21.851935242	42.9392

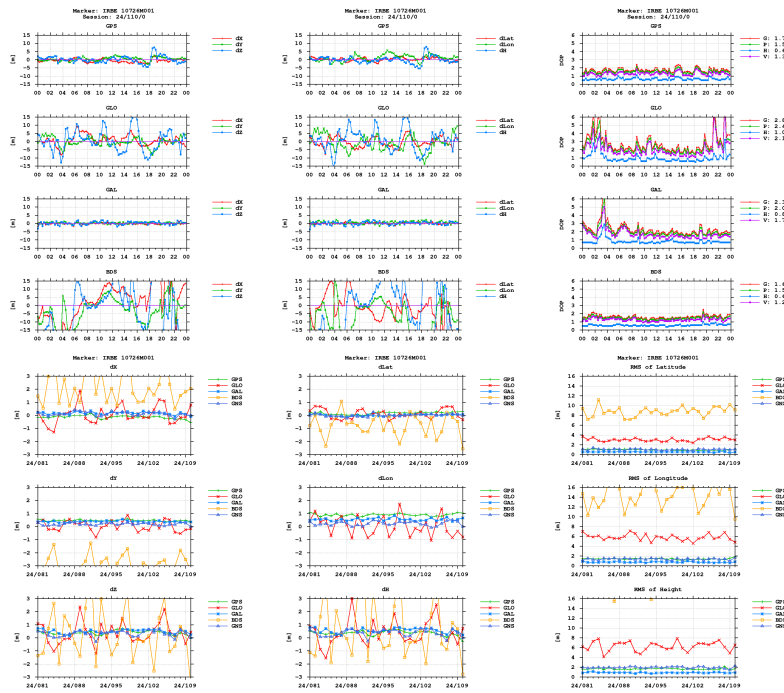

Equipment

2024-03-21 00:00:00 LEICA GR30 4.60/7.811 1706733 LEICA GR30

Program info

G-Nut/Anubis Free [3.8] Mar 3 2024 20:32:19 (Rev: 4233)