

GNSS observation file monitoring for KIRU

Last RINEX file: KIRU1970.25D.Z


RINEX version: 4.01

Marker: KIRU 10403M002

Receiver: 4701570 SEPT POLARX5TR 5.5.0

Antenna: 5651 SEPCHOKE_B3E6 SPKE


Epochs

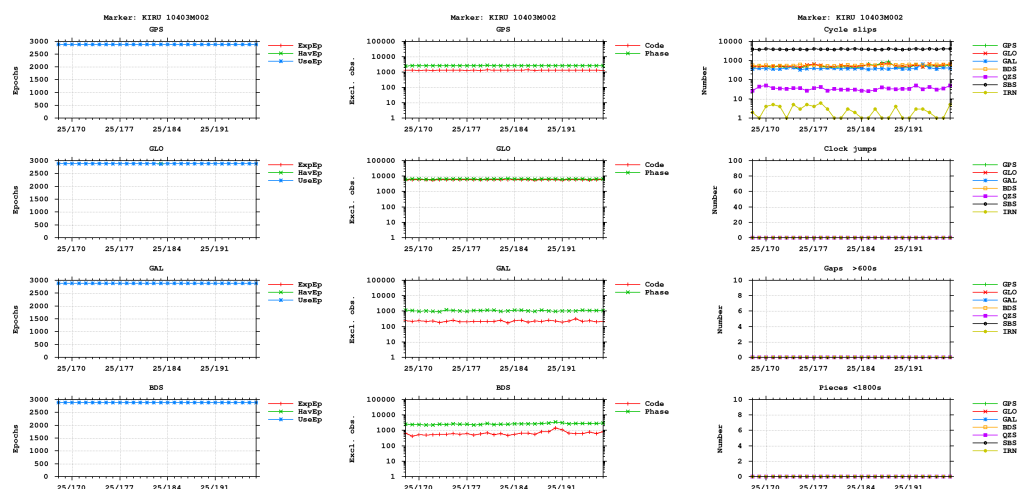


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites






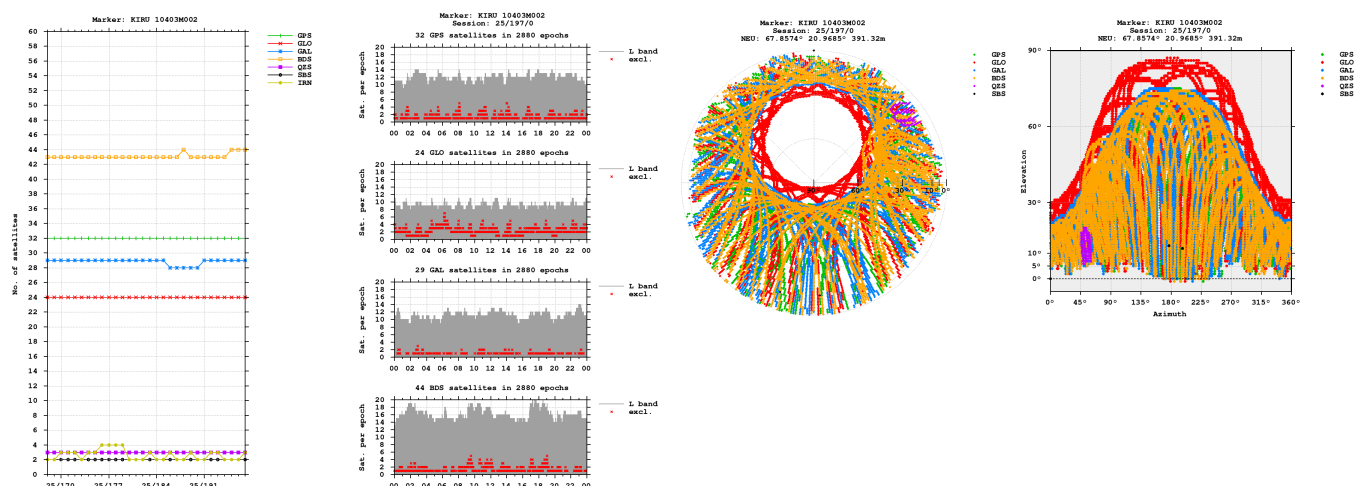


Bands
















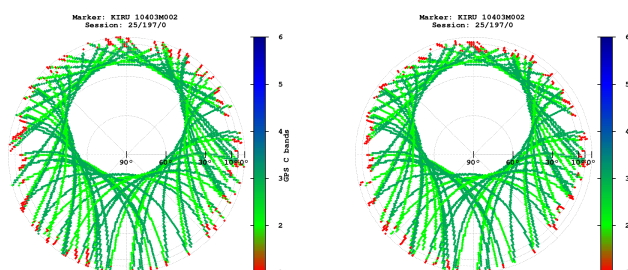


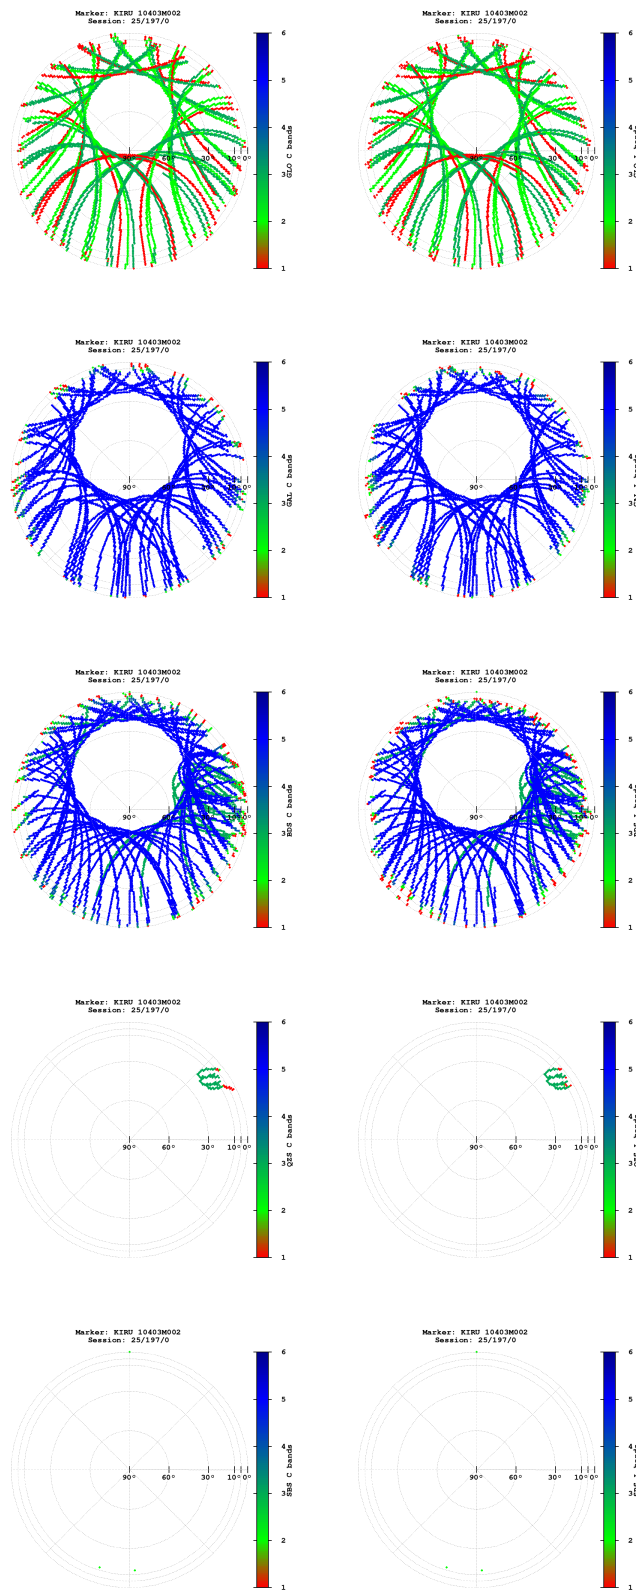

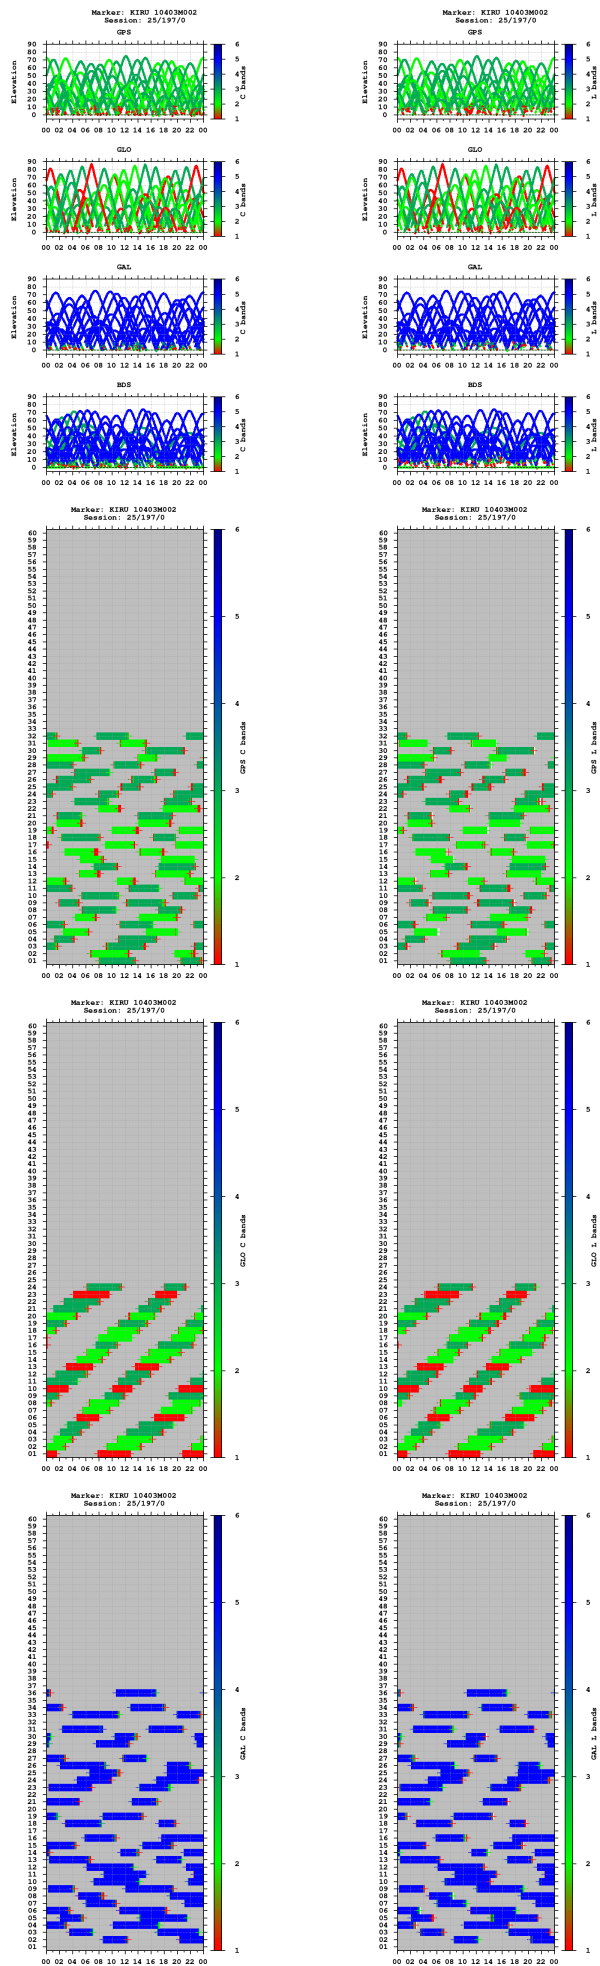


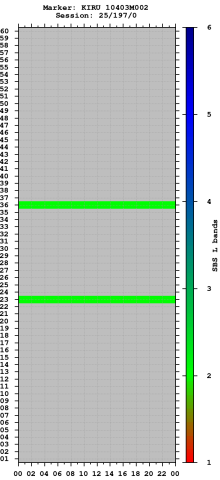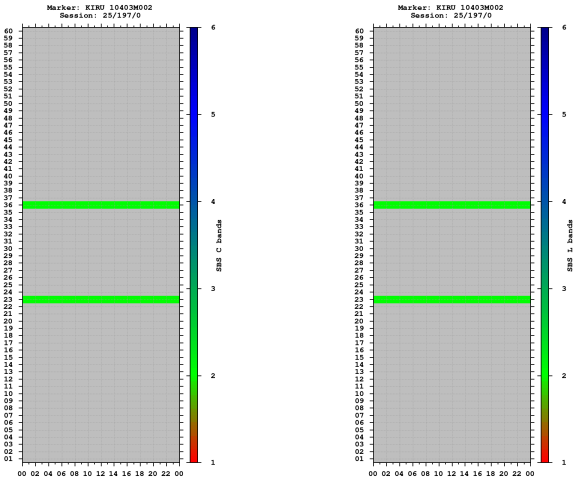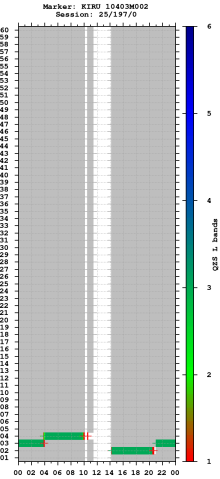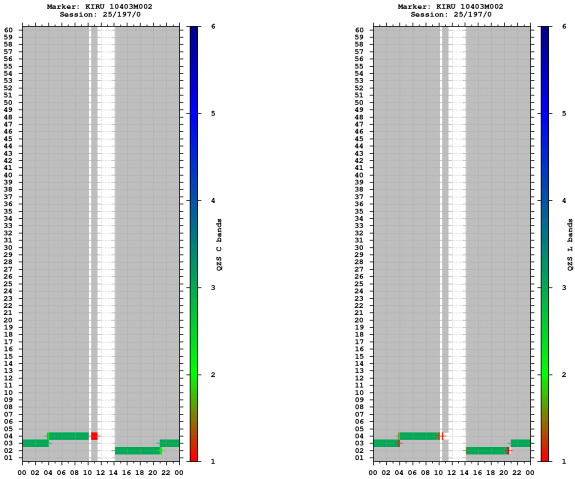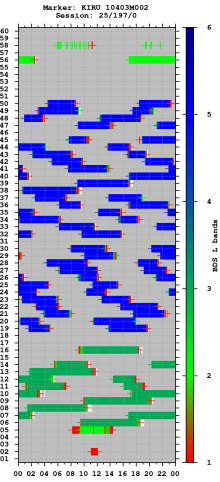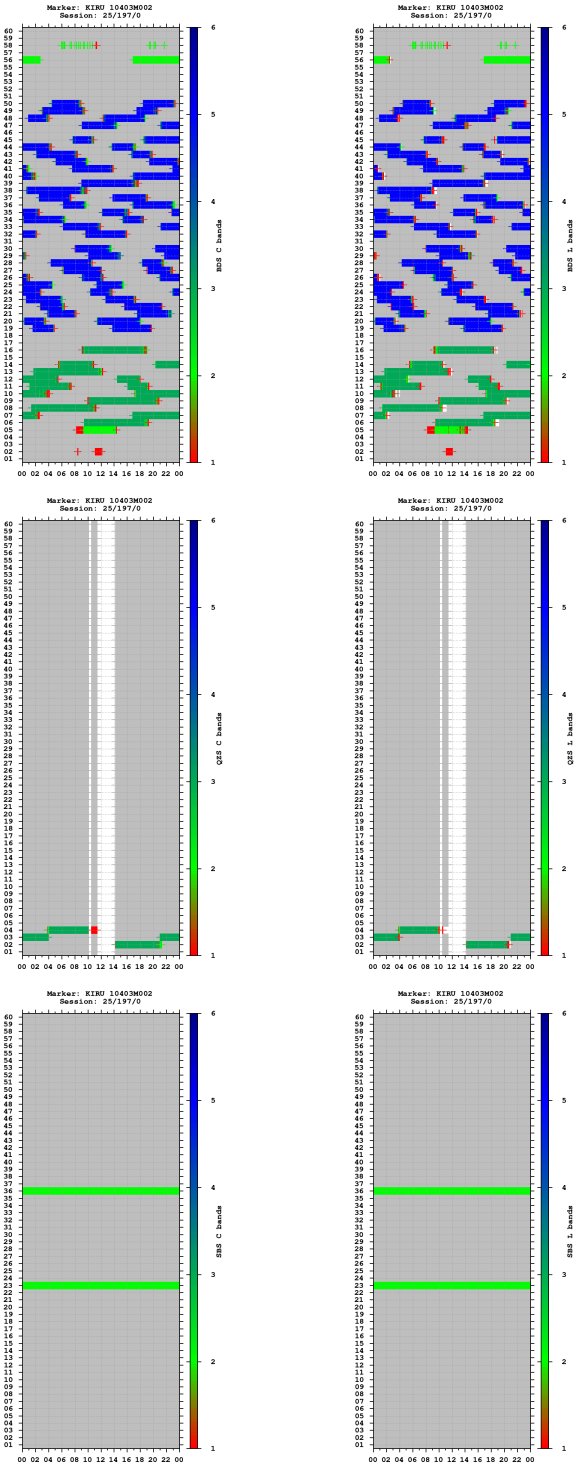



Observations

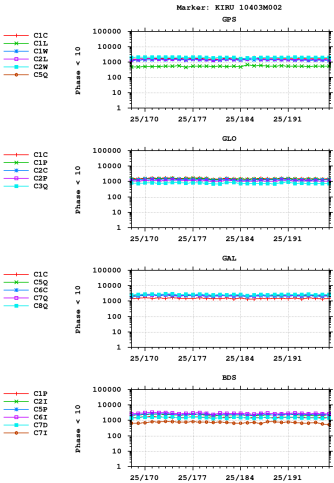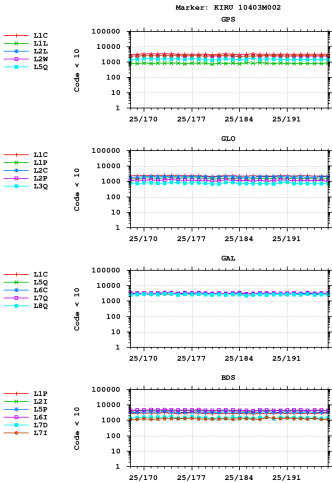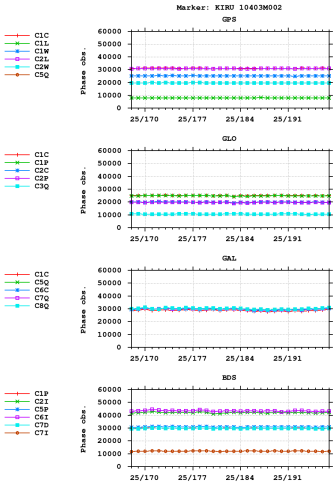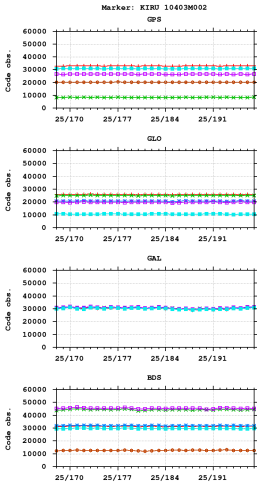


[illegible]




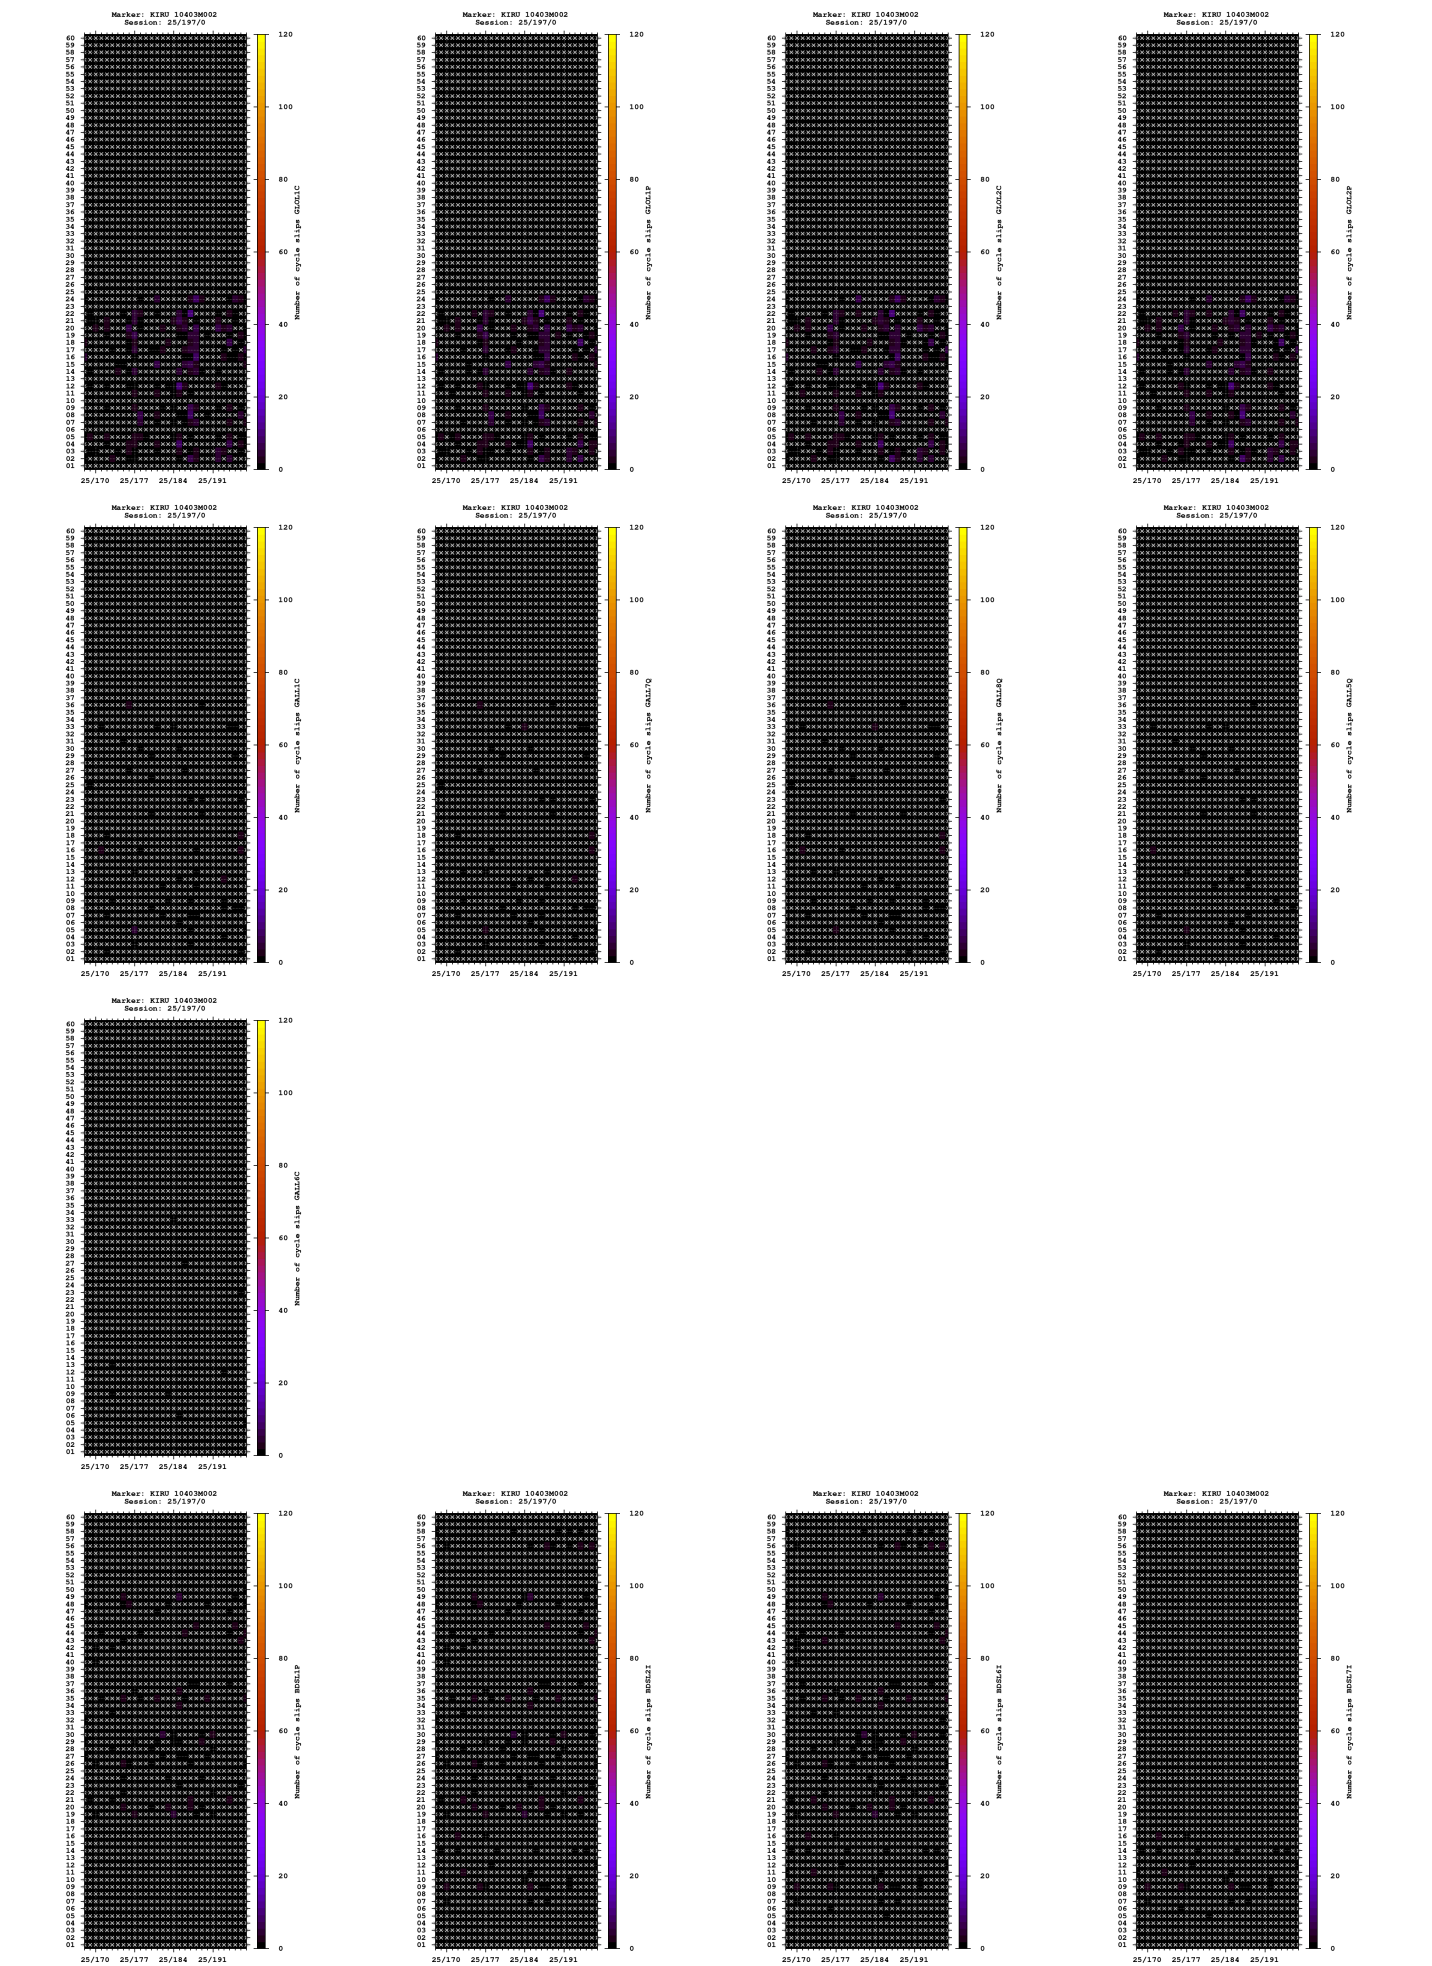


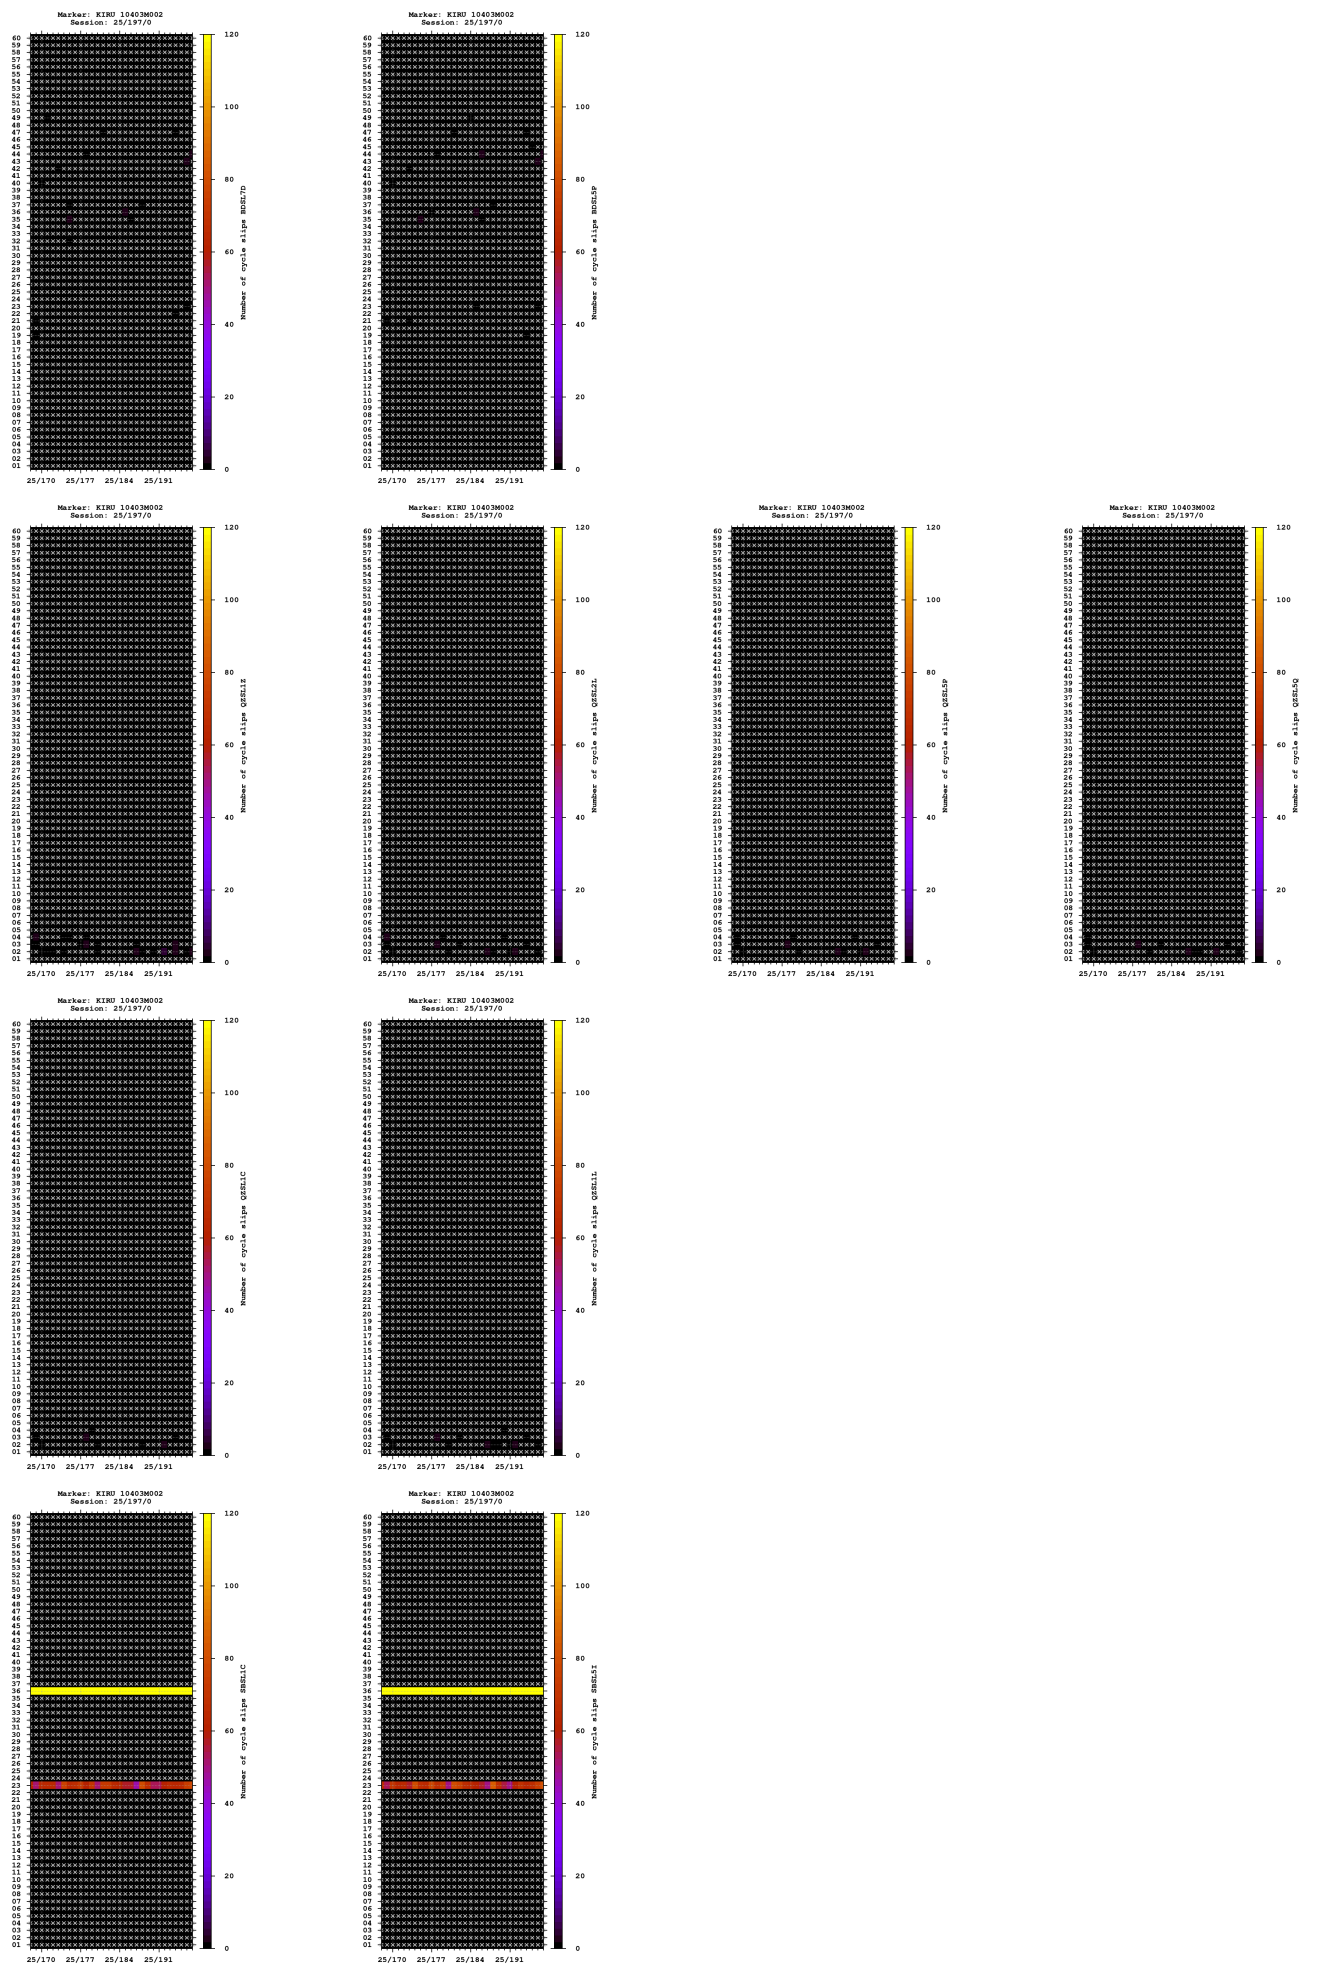



Multipath

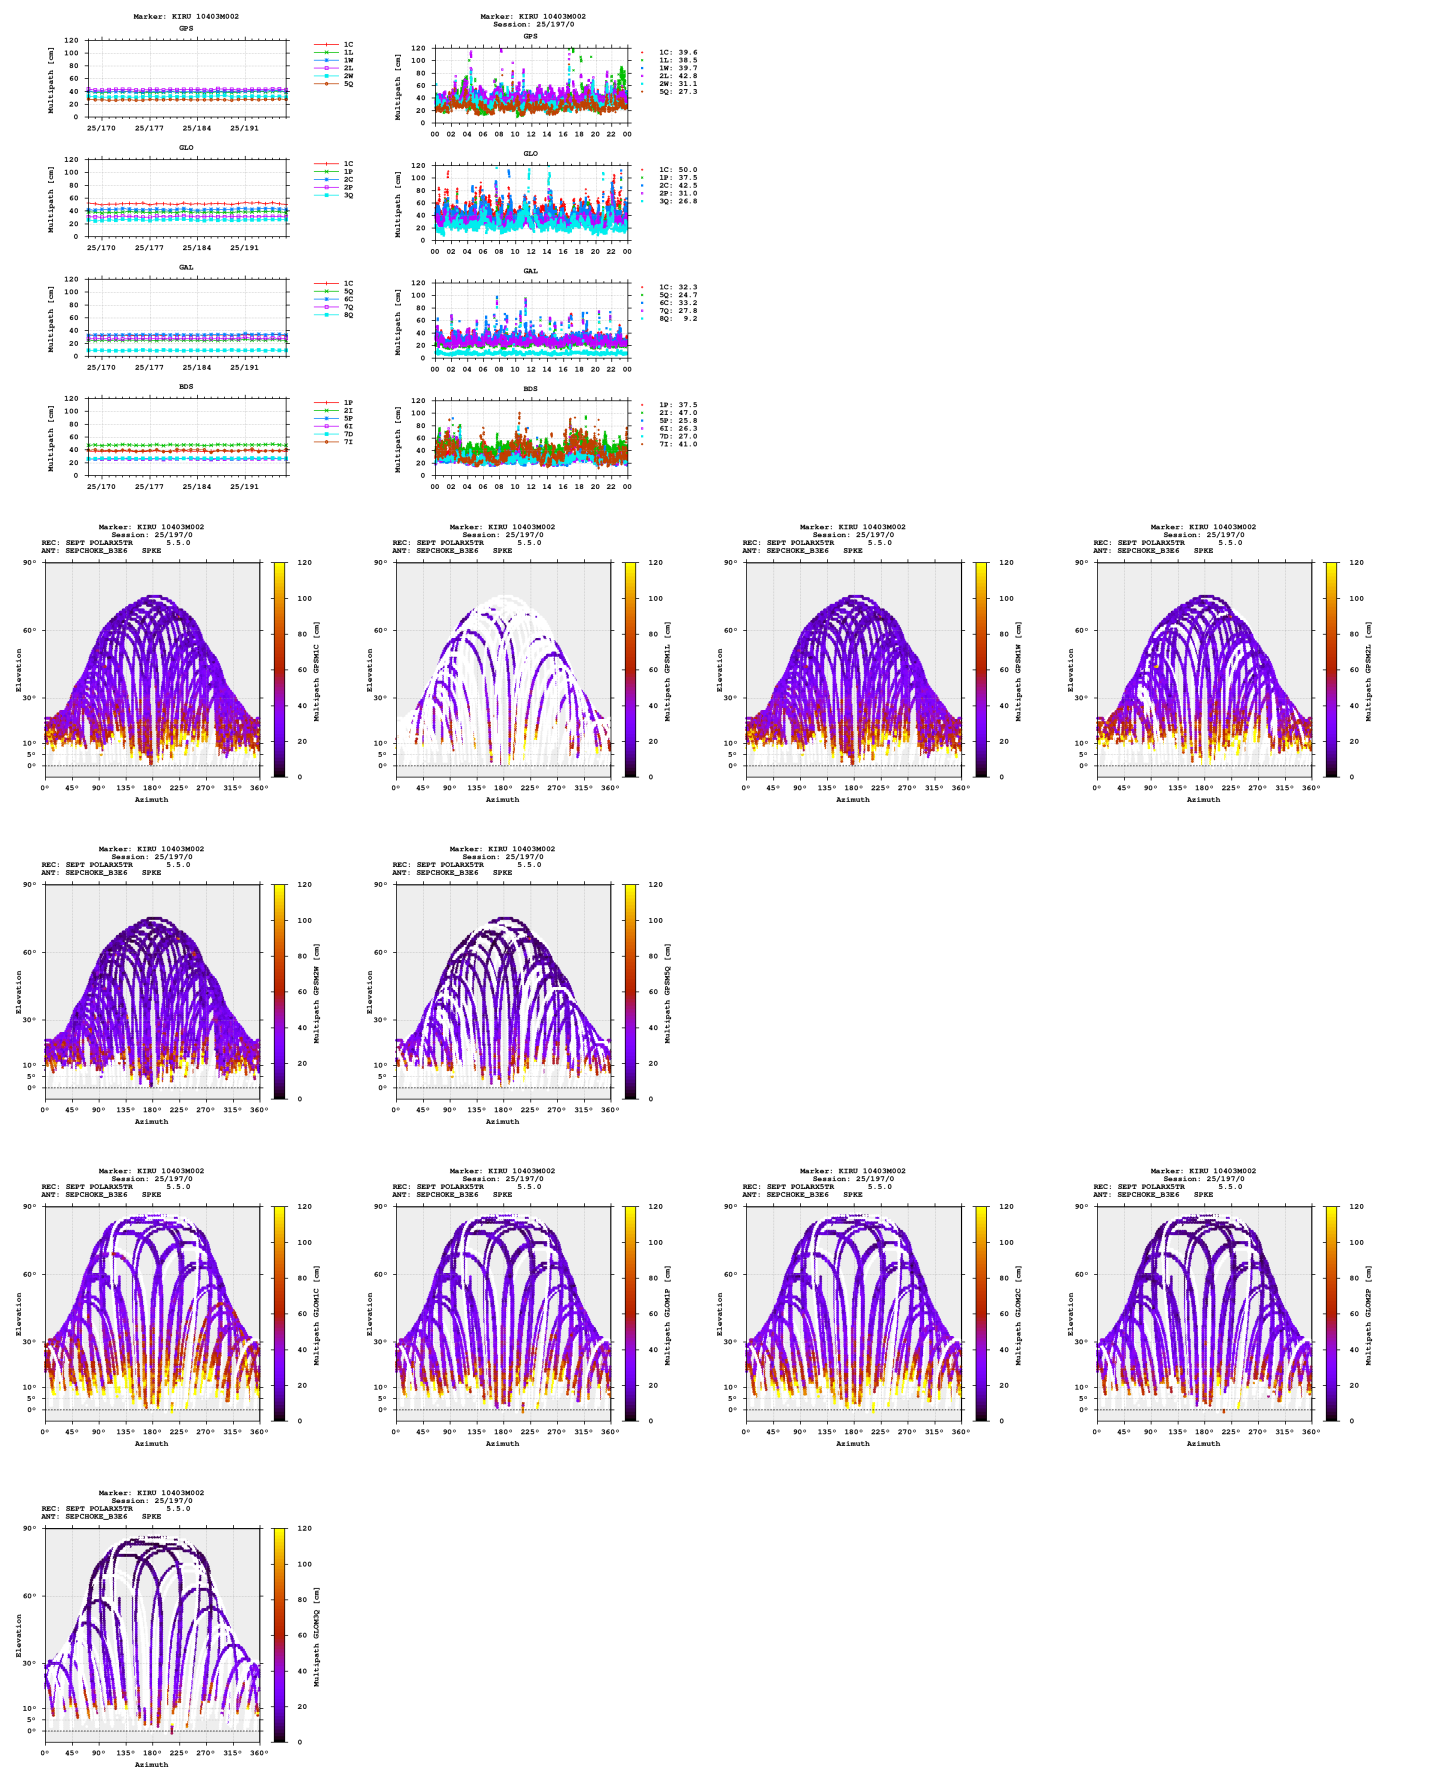

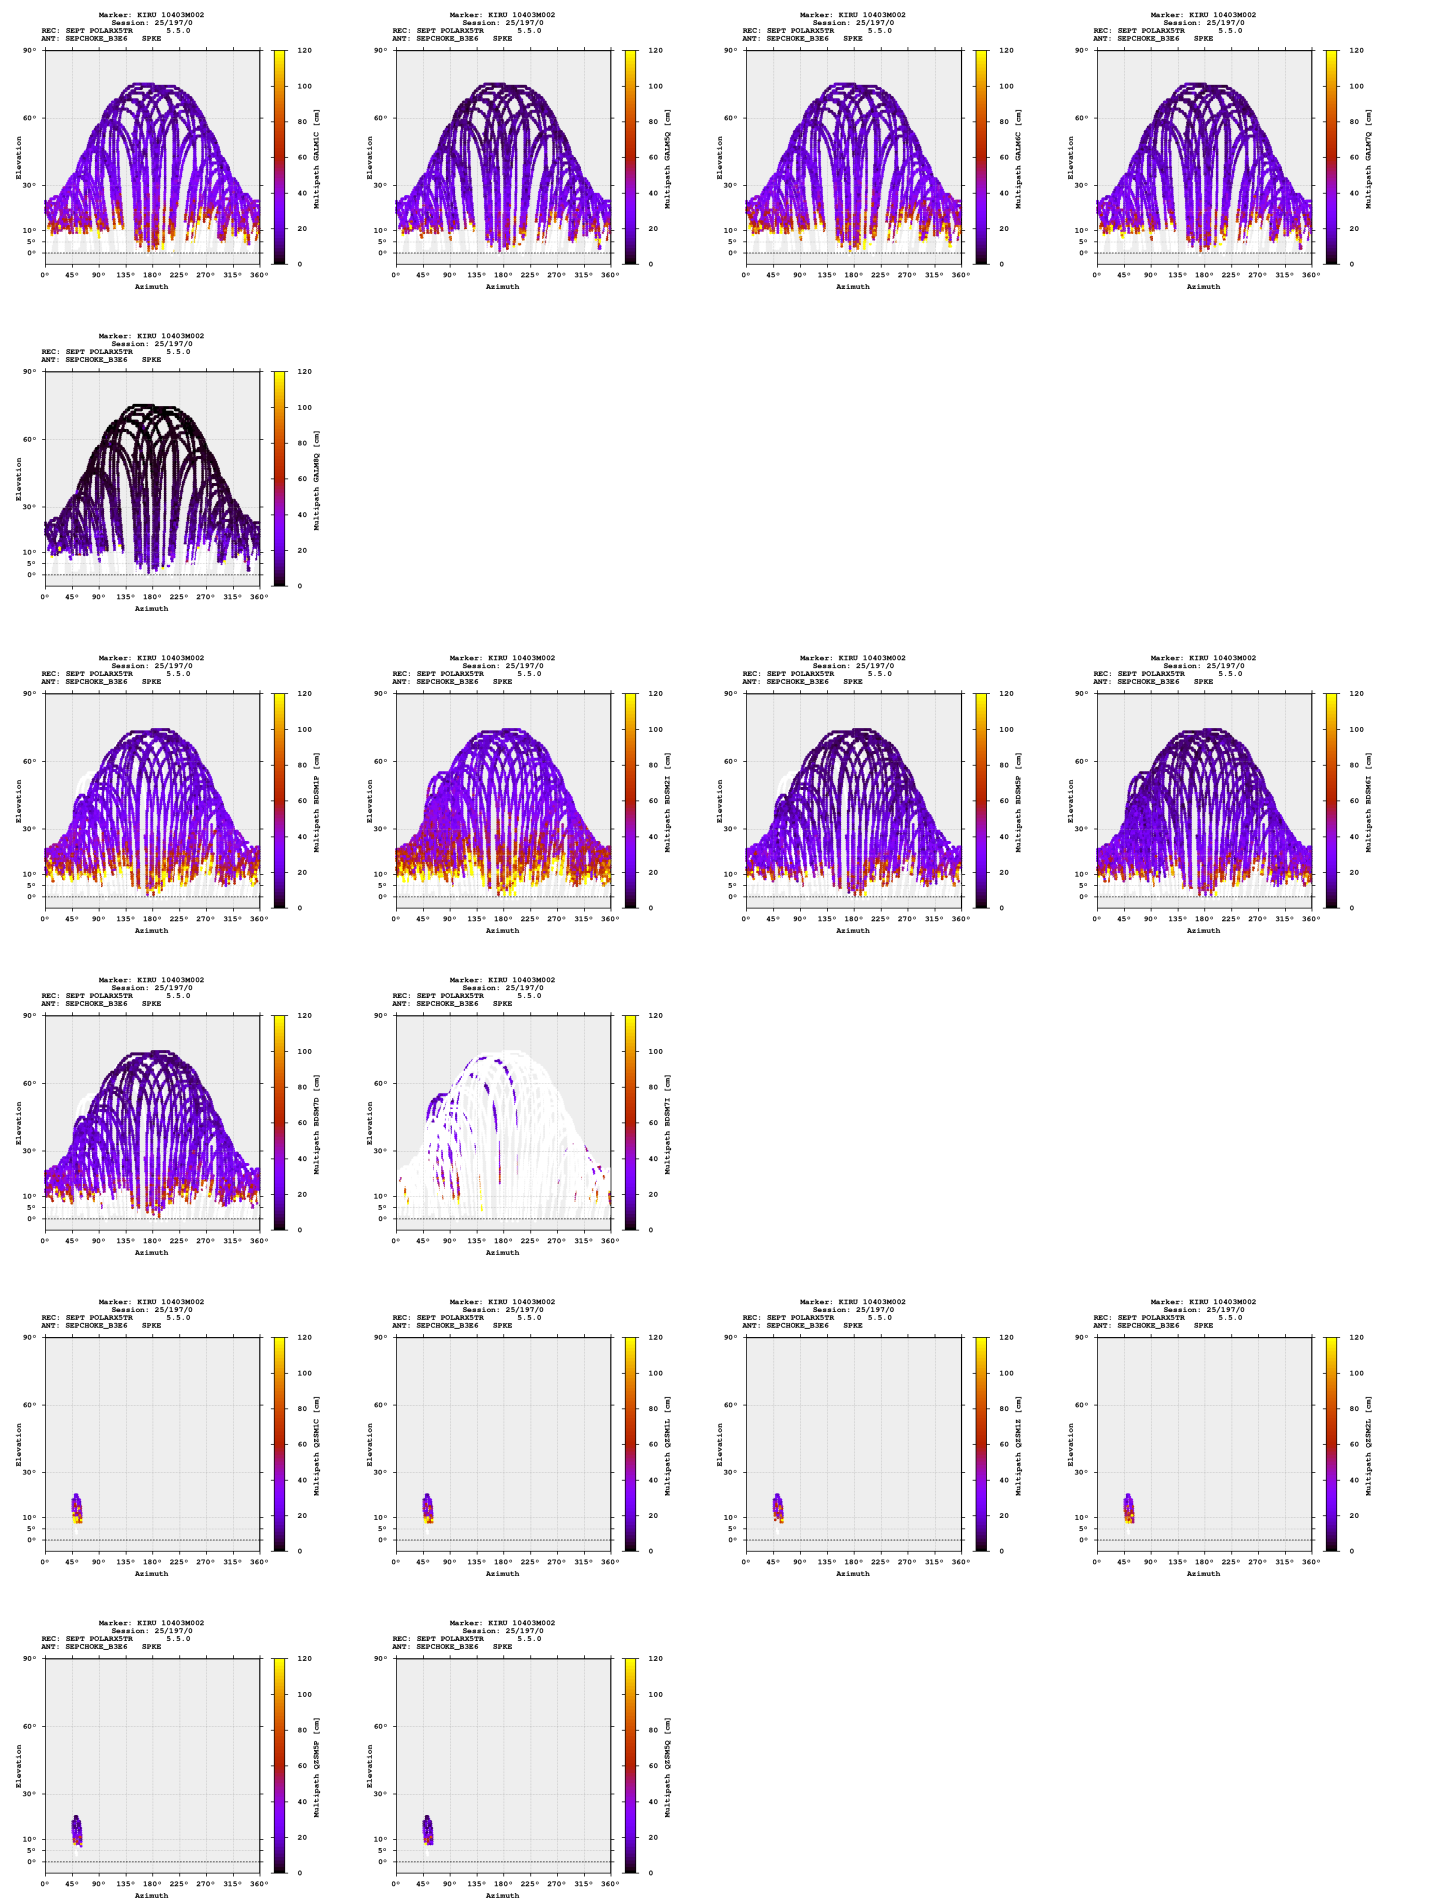

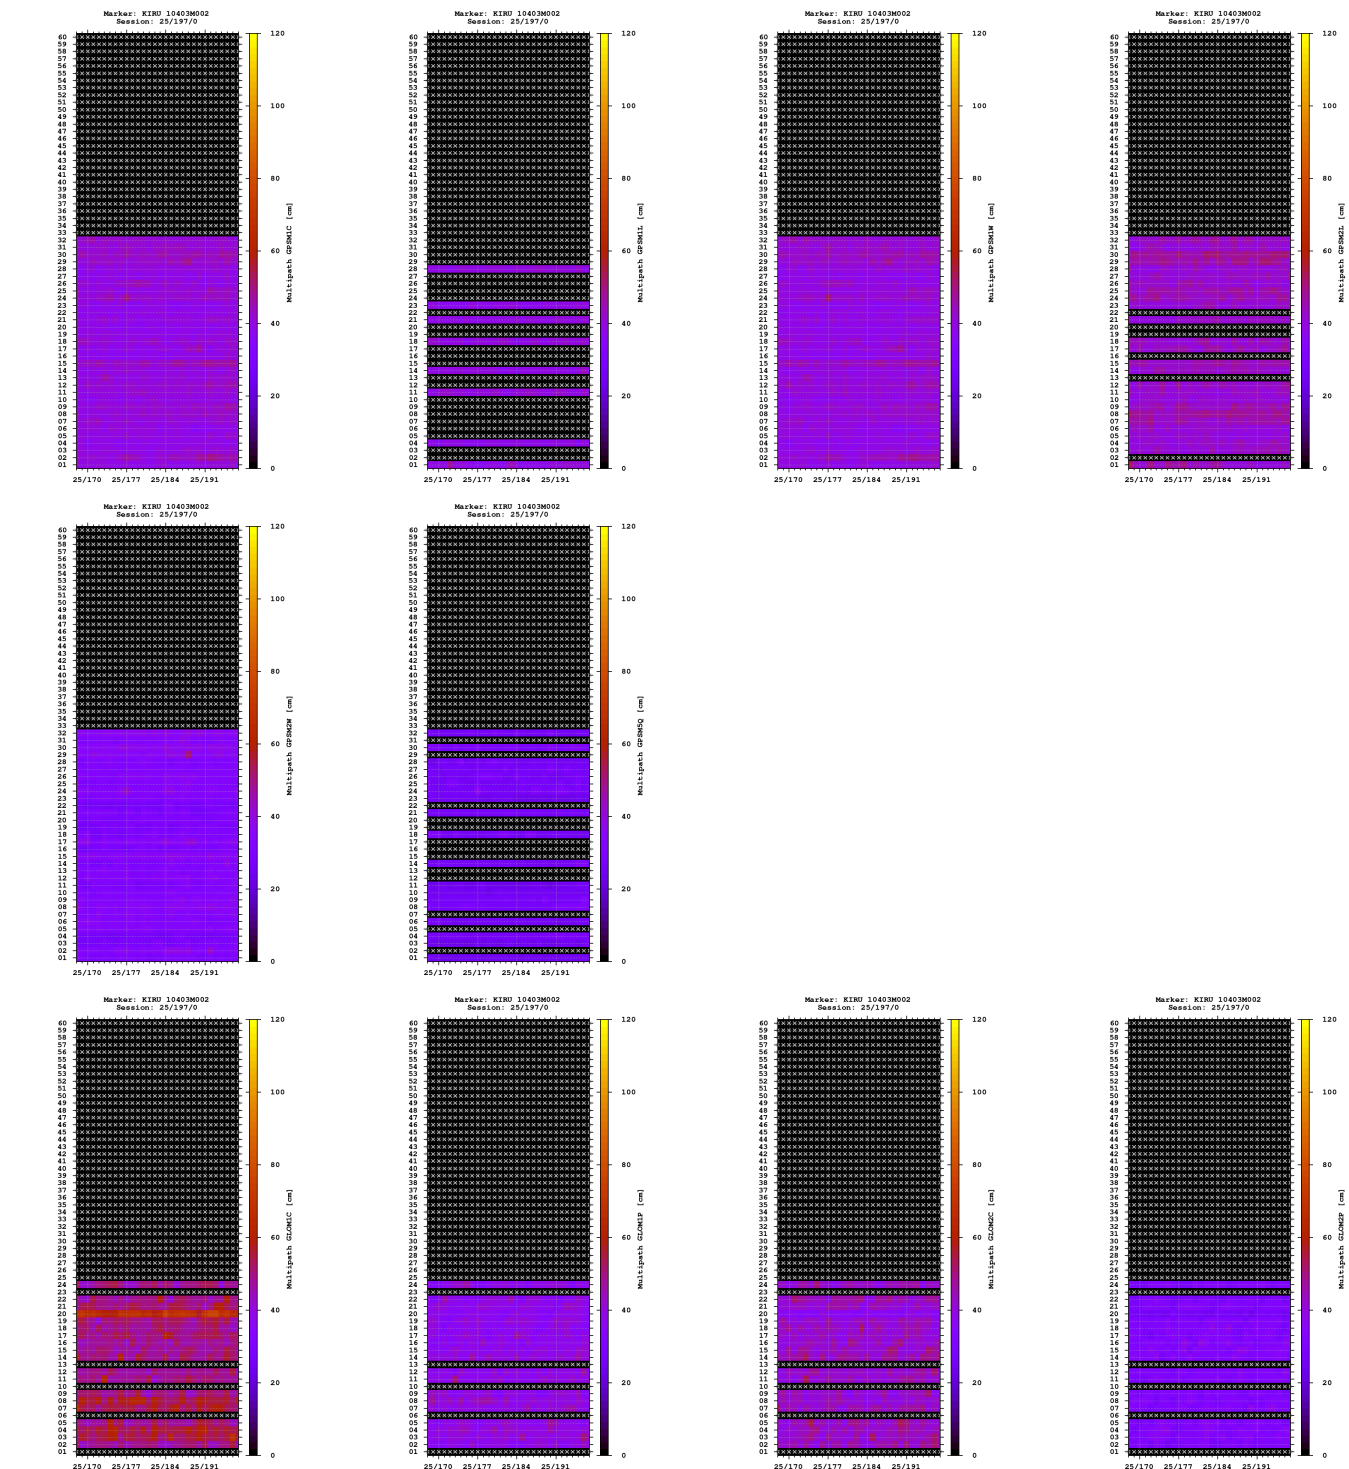


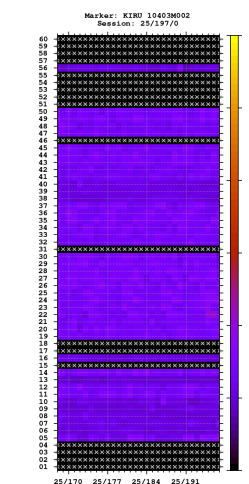


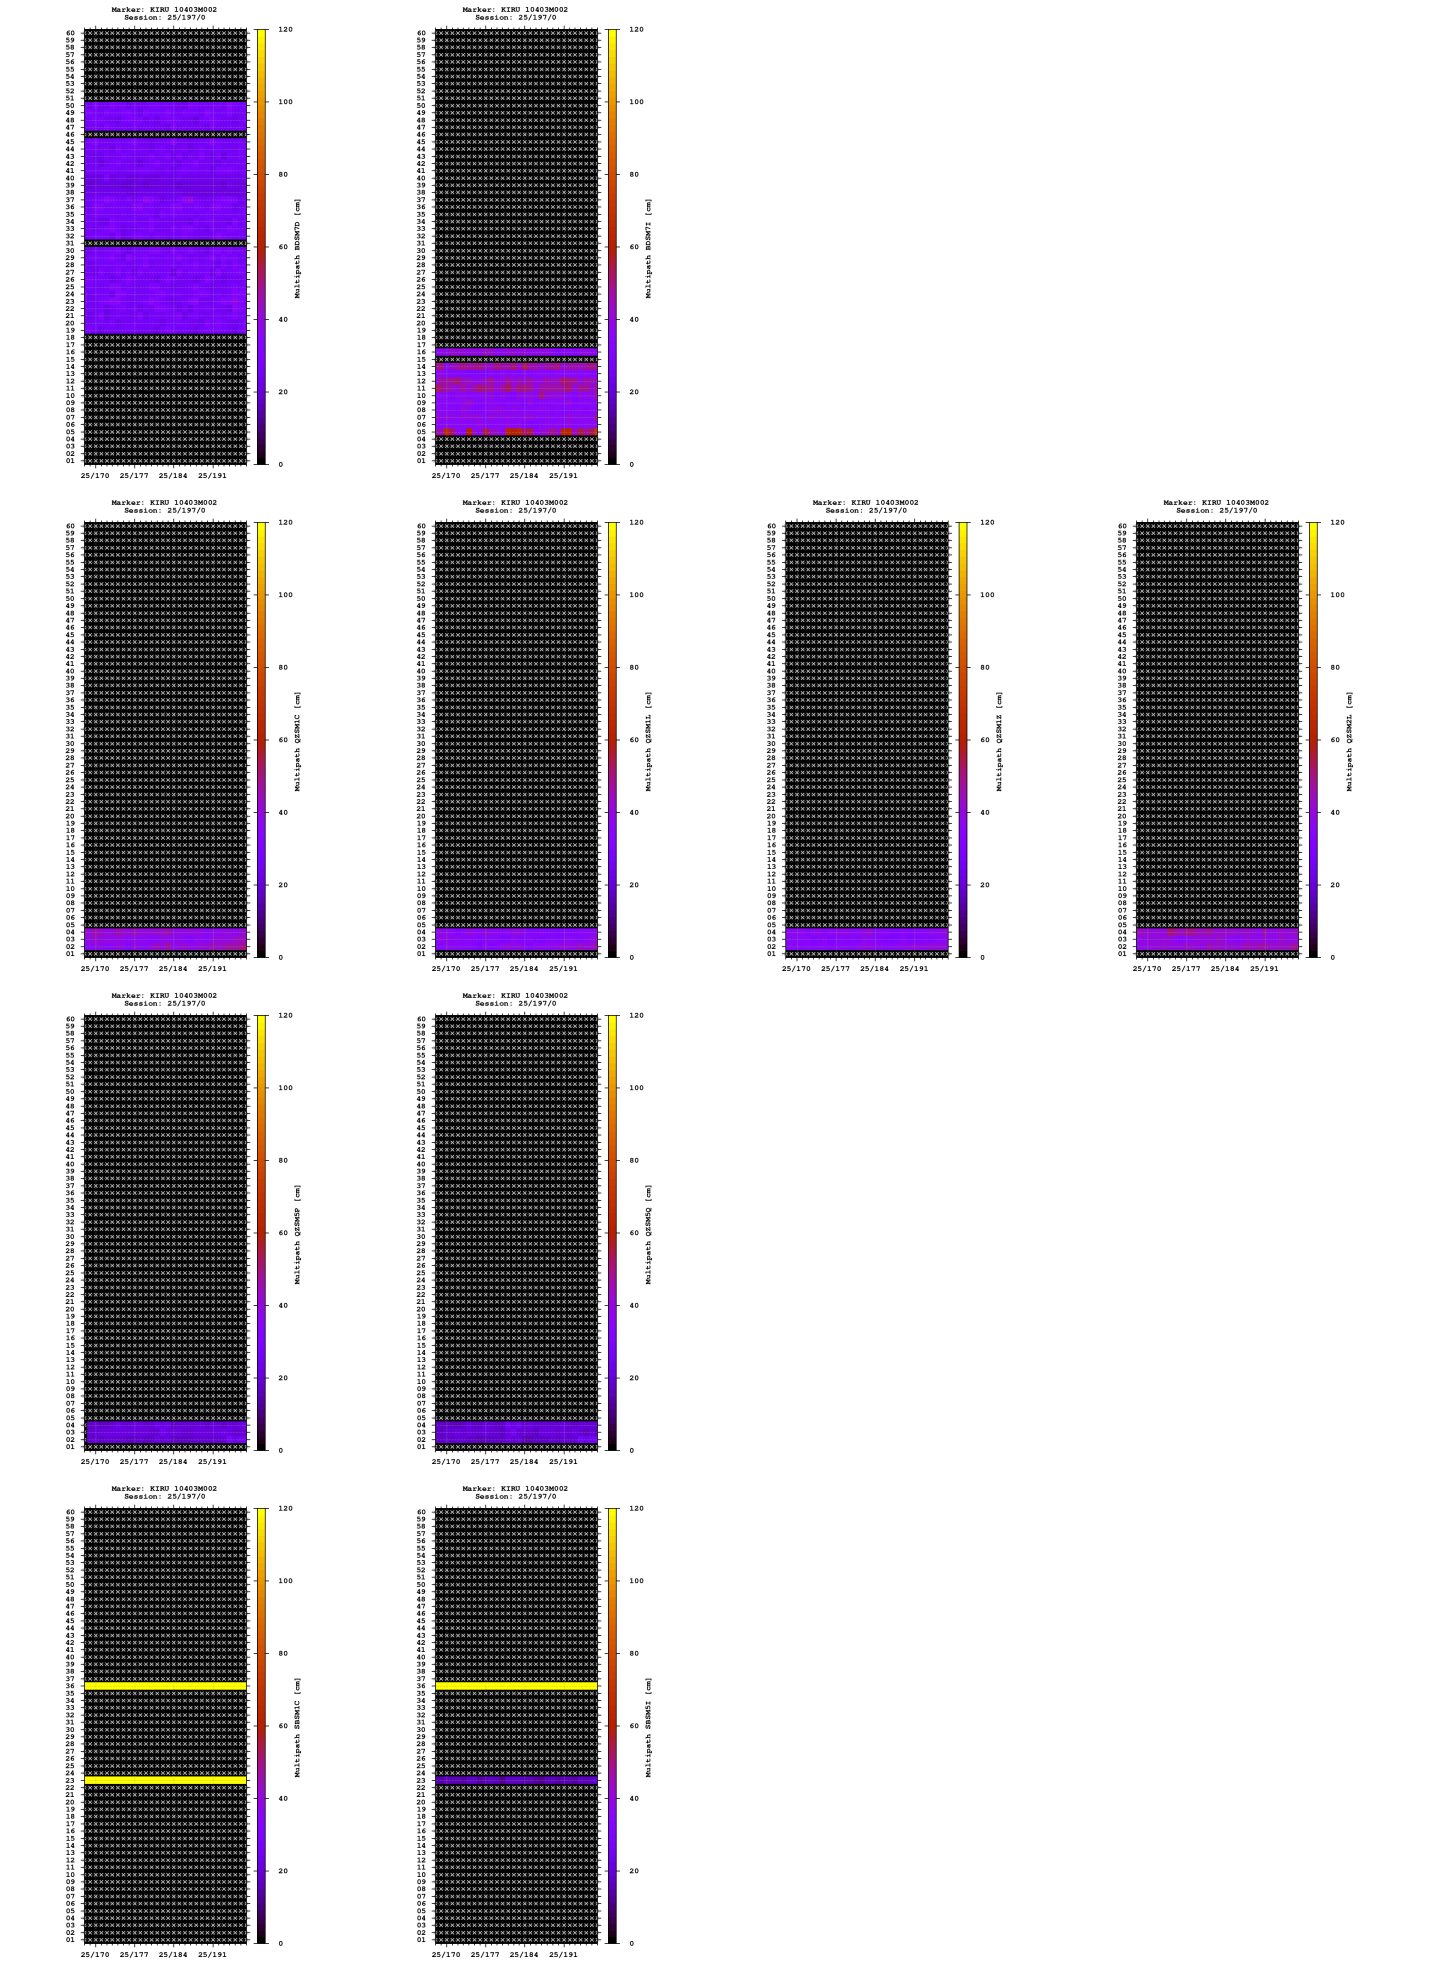



- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

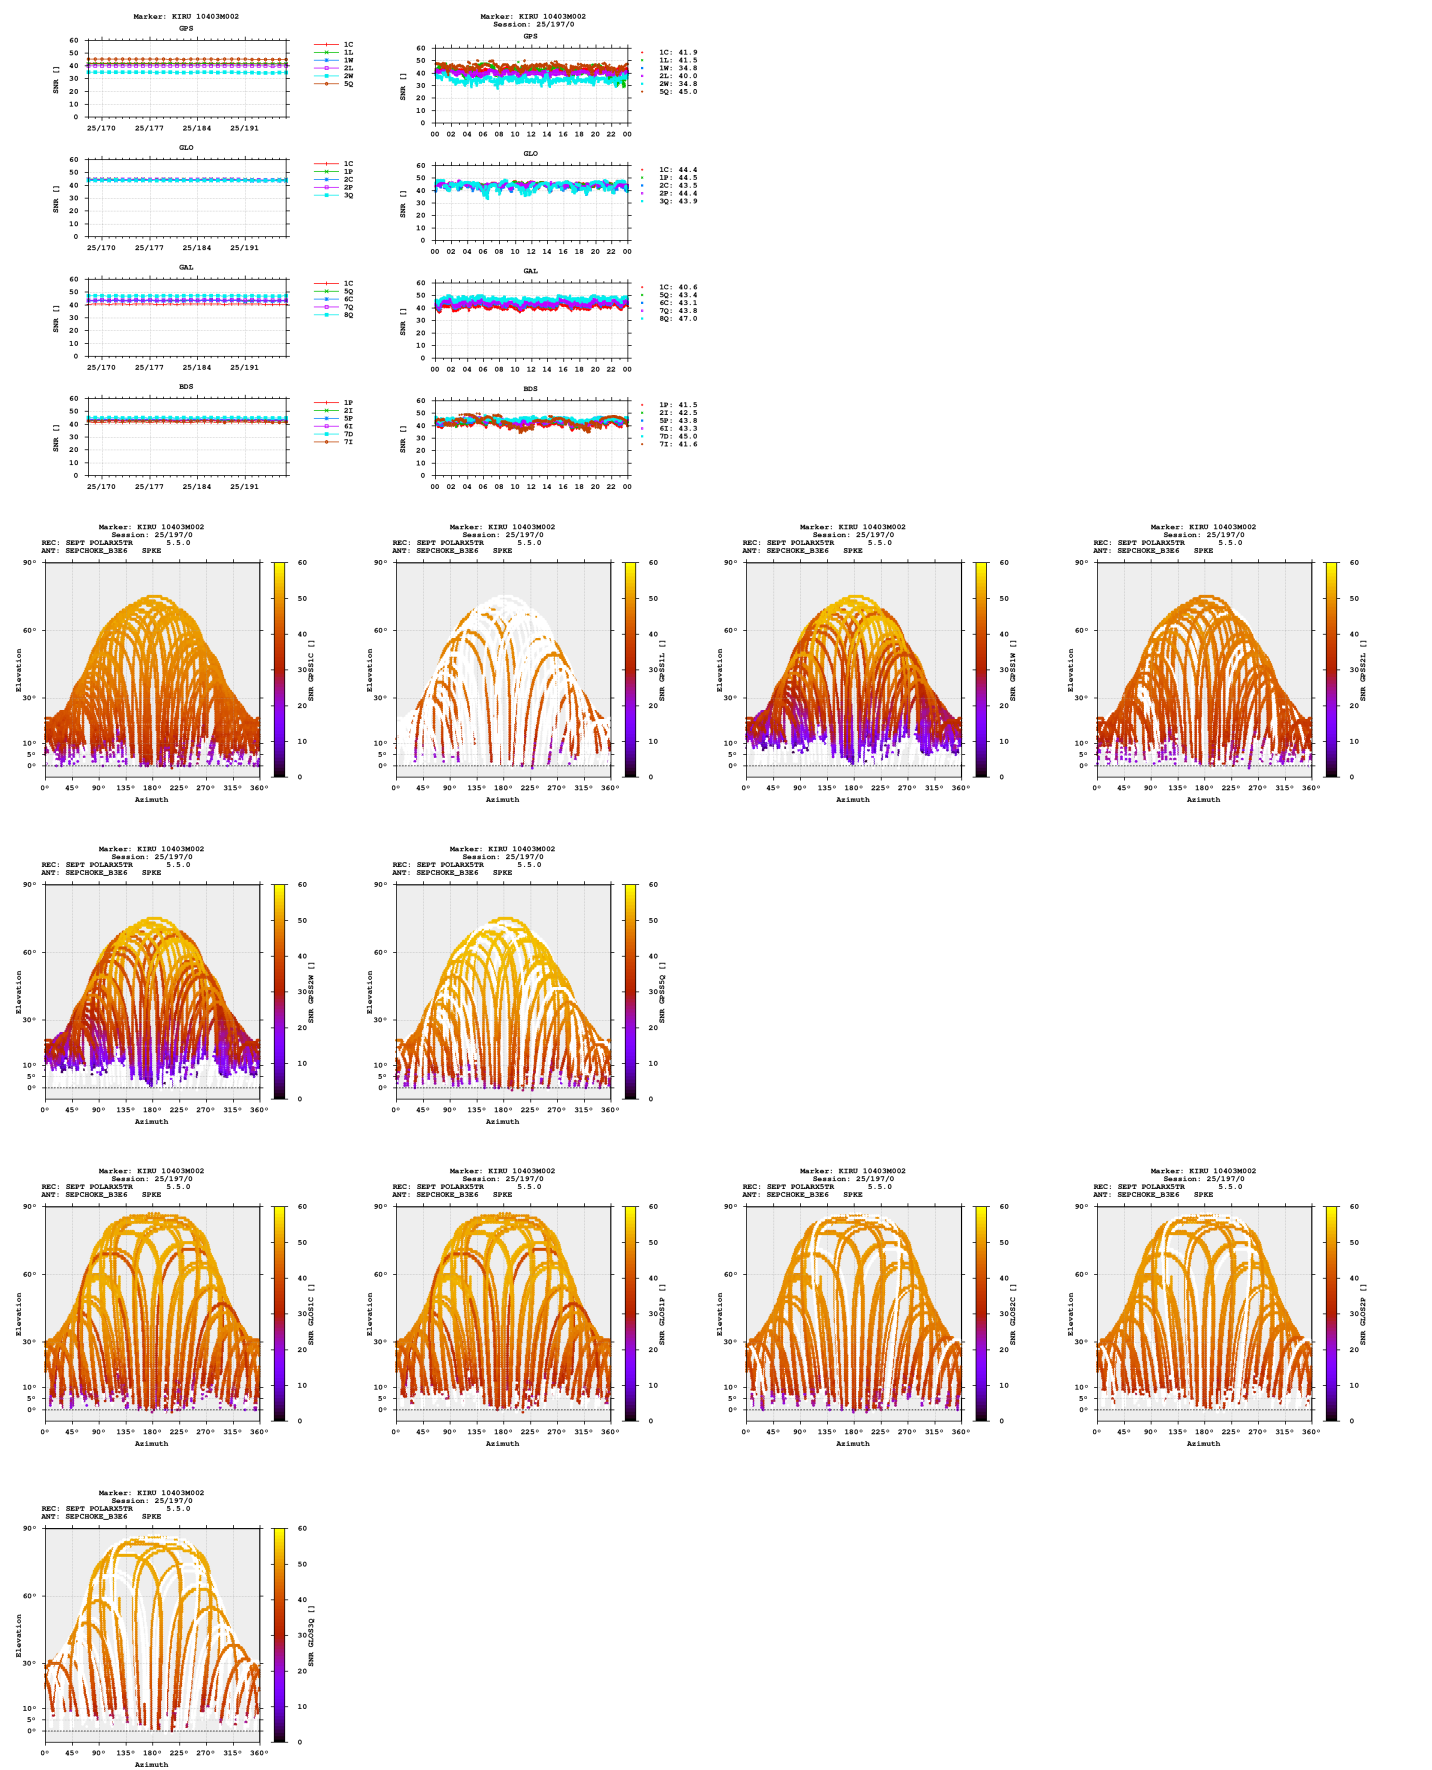

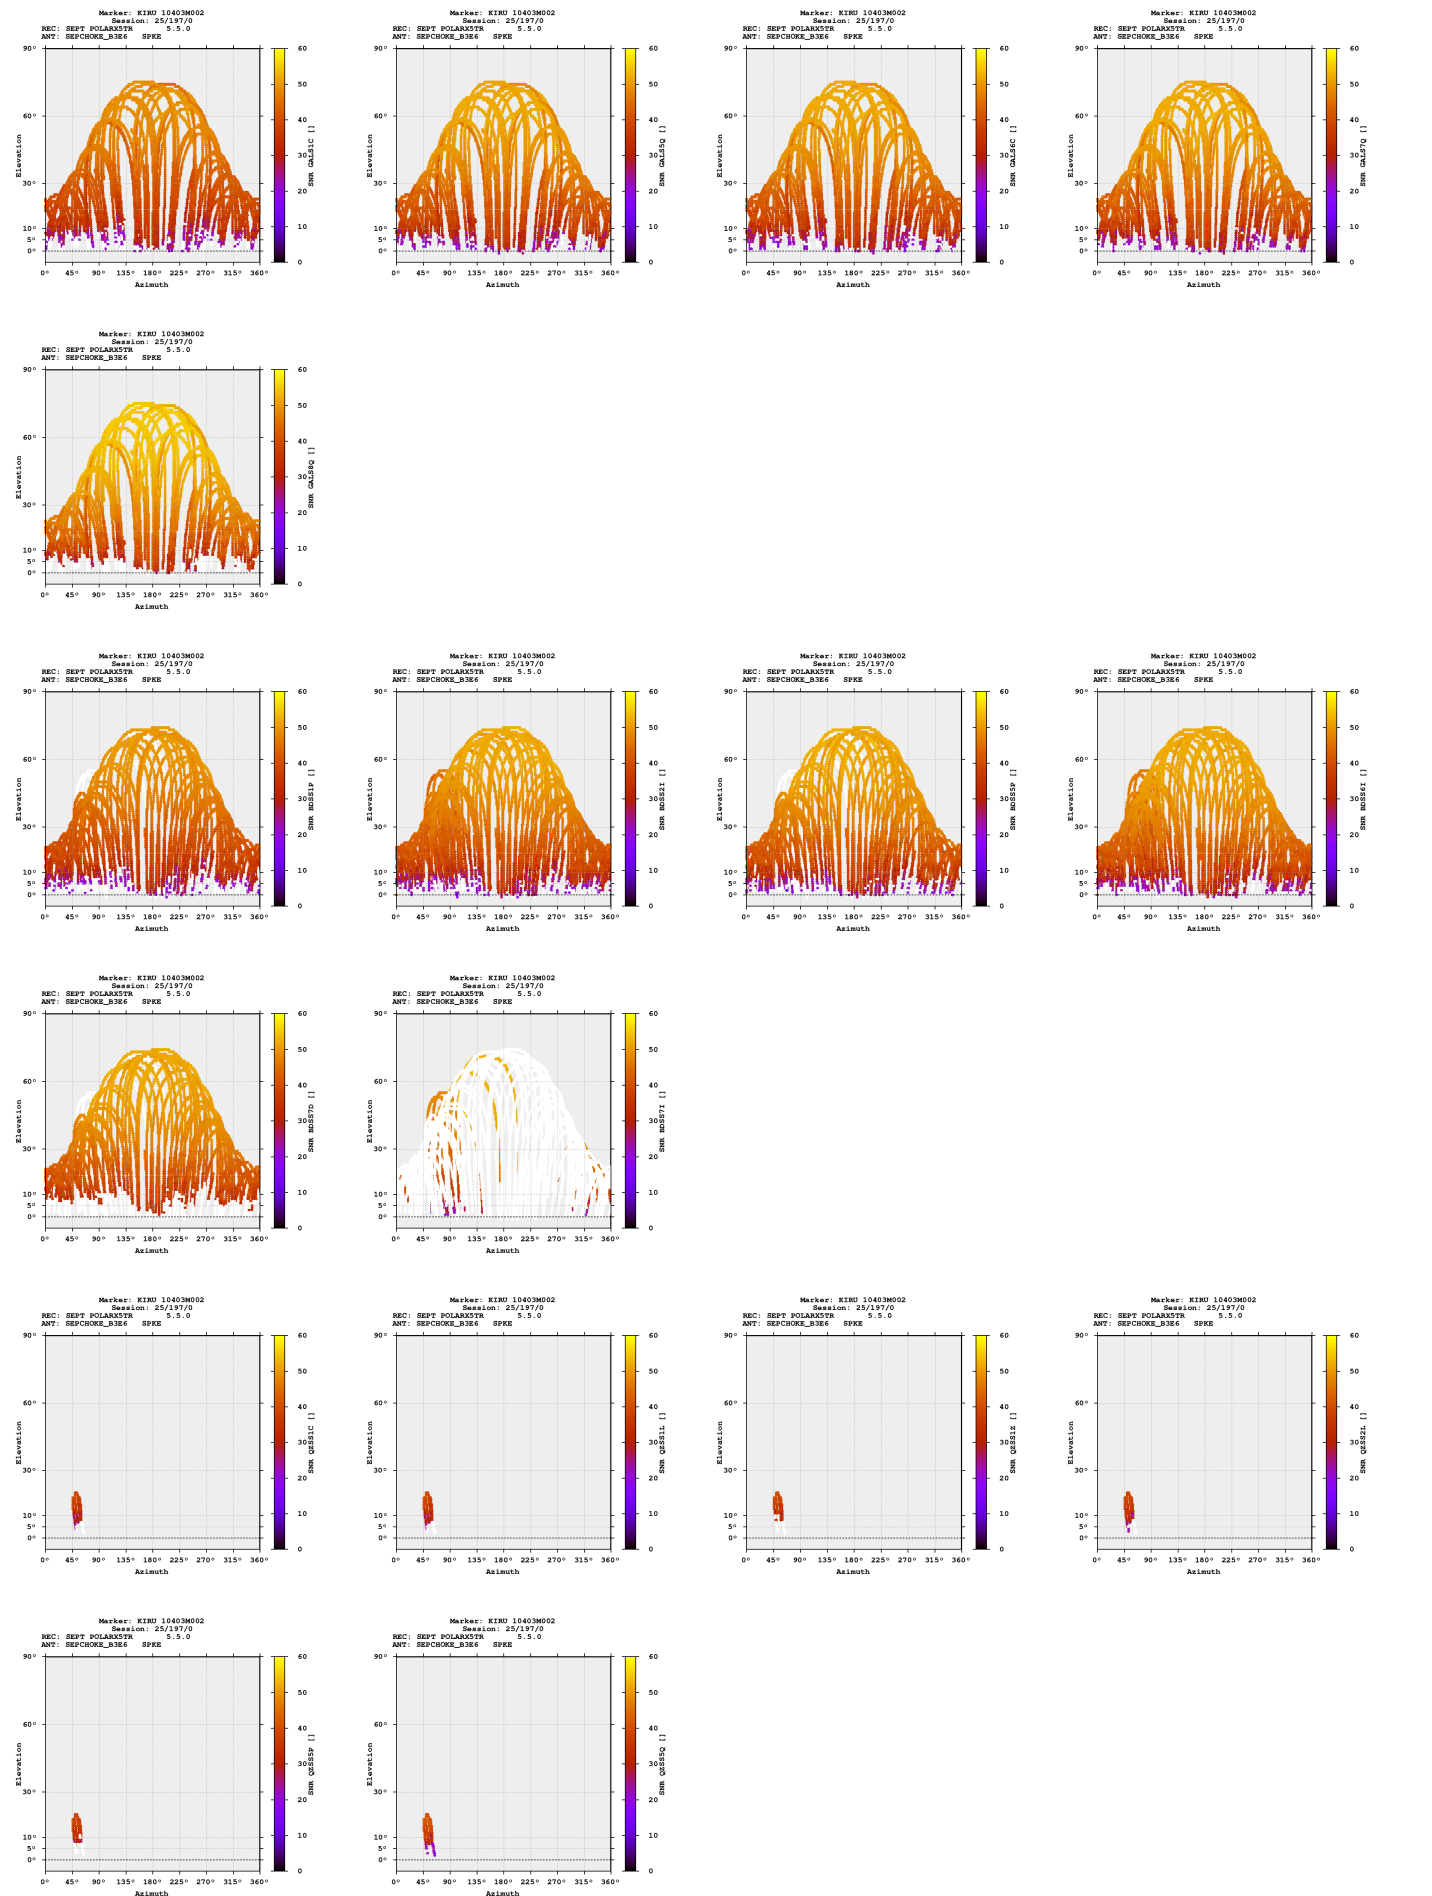

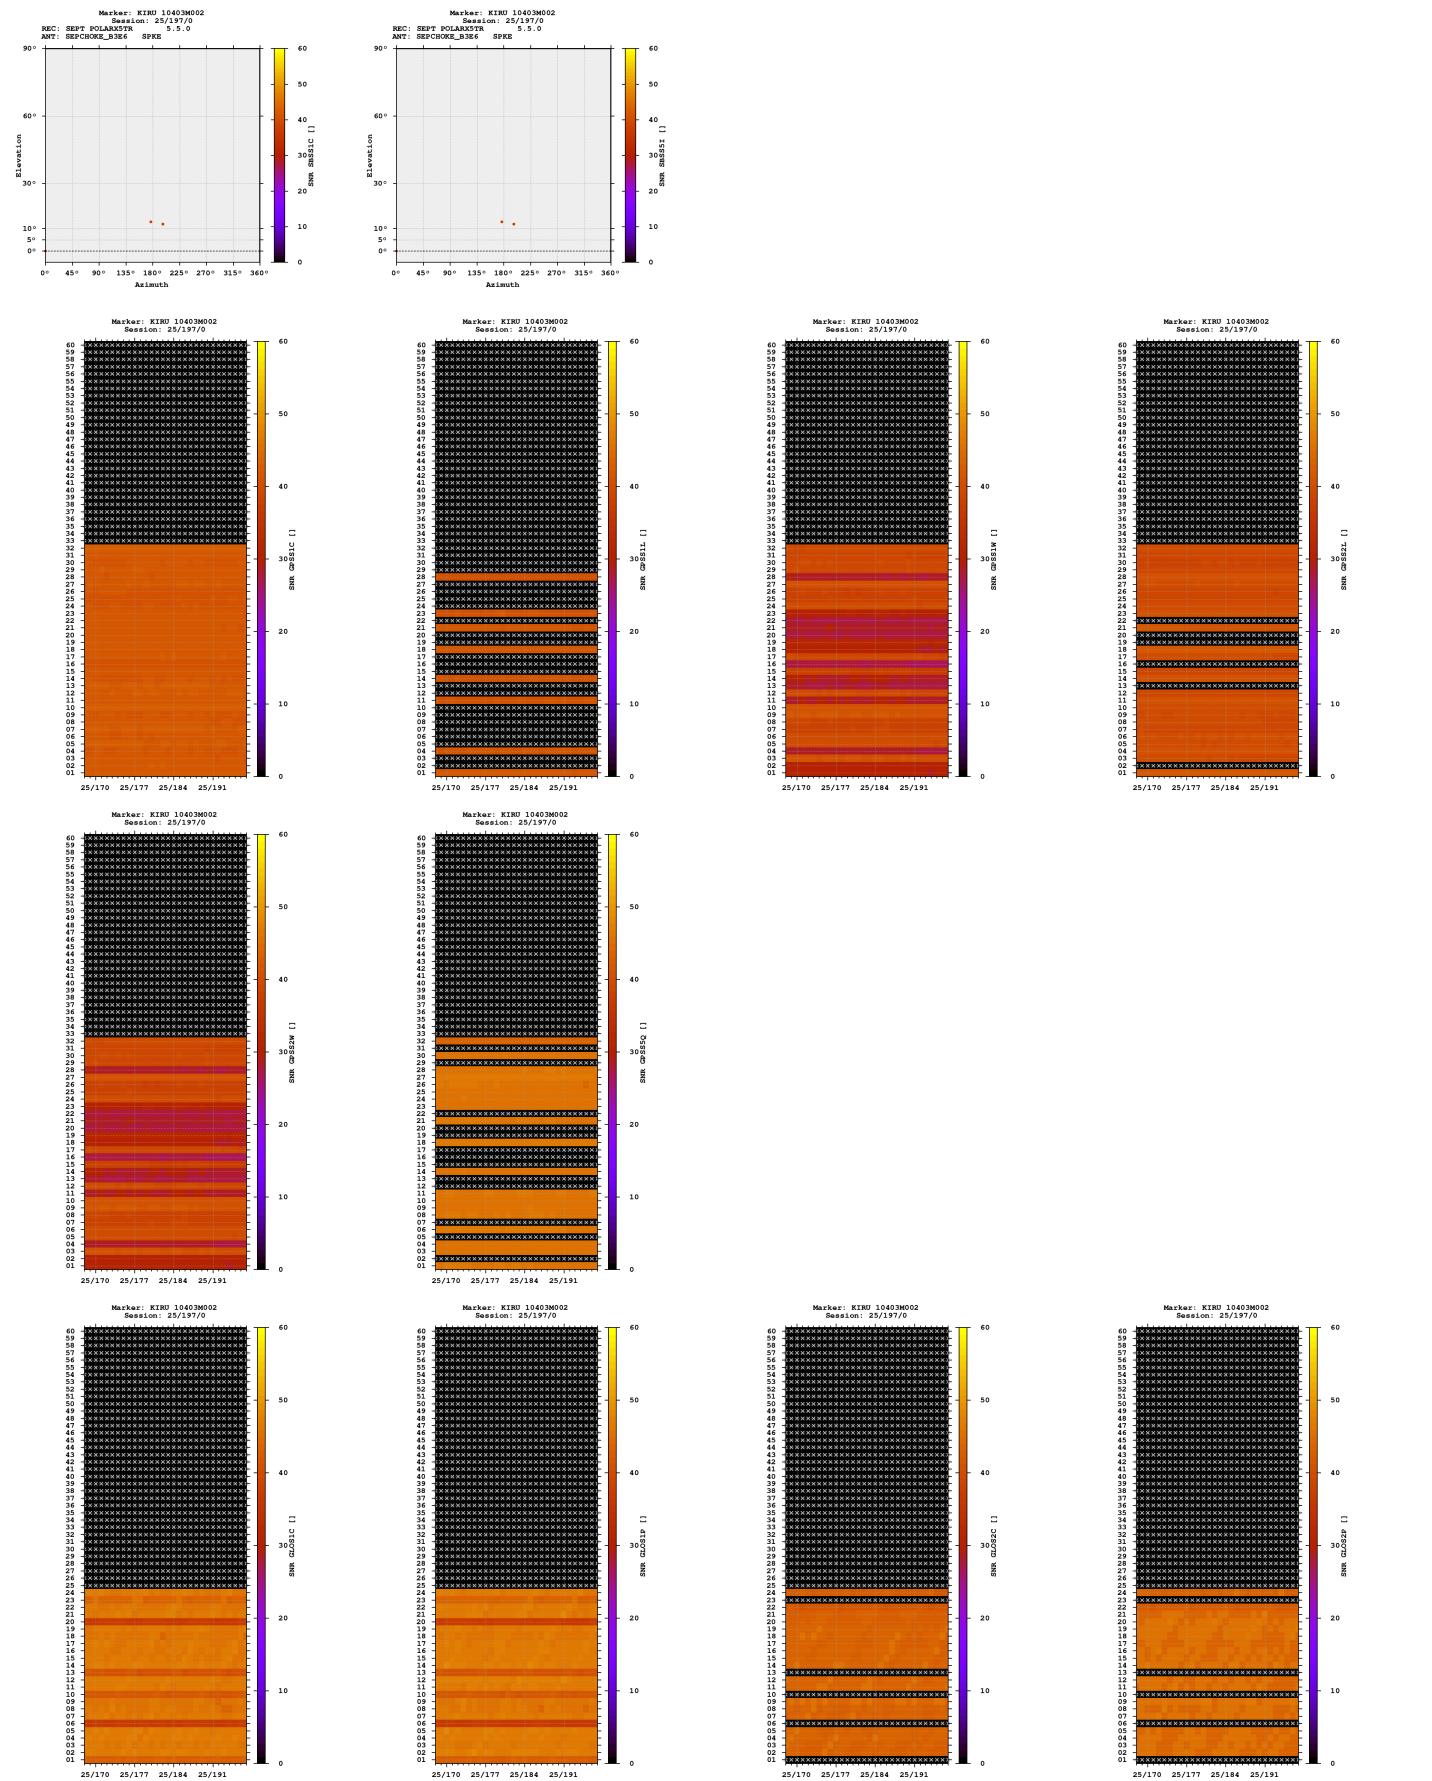

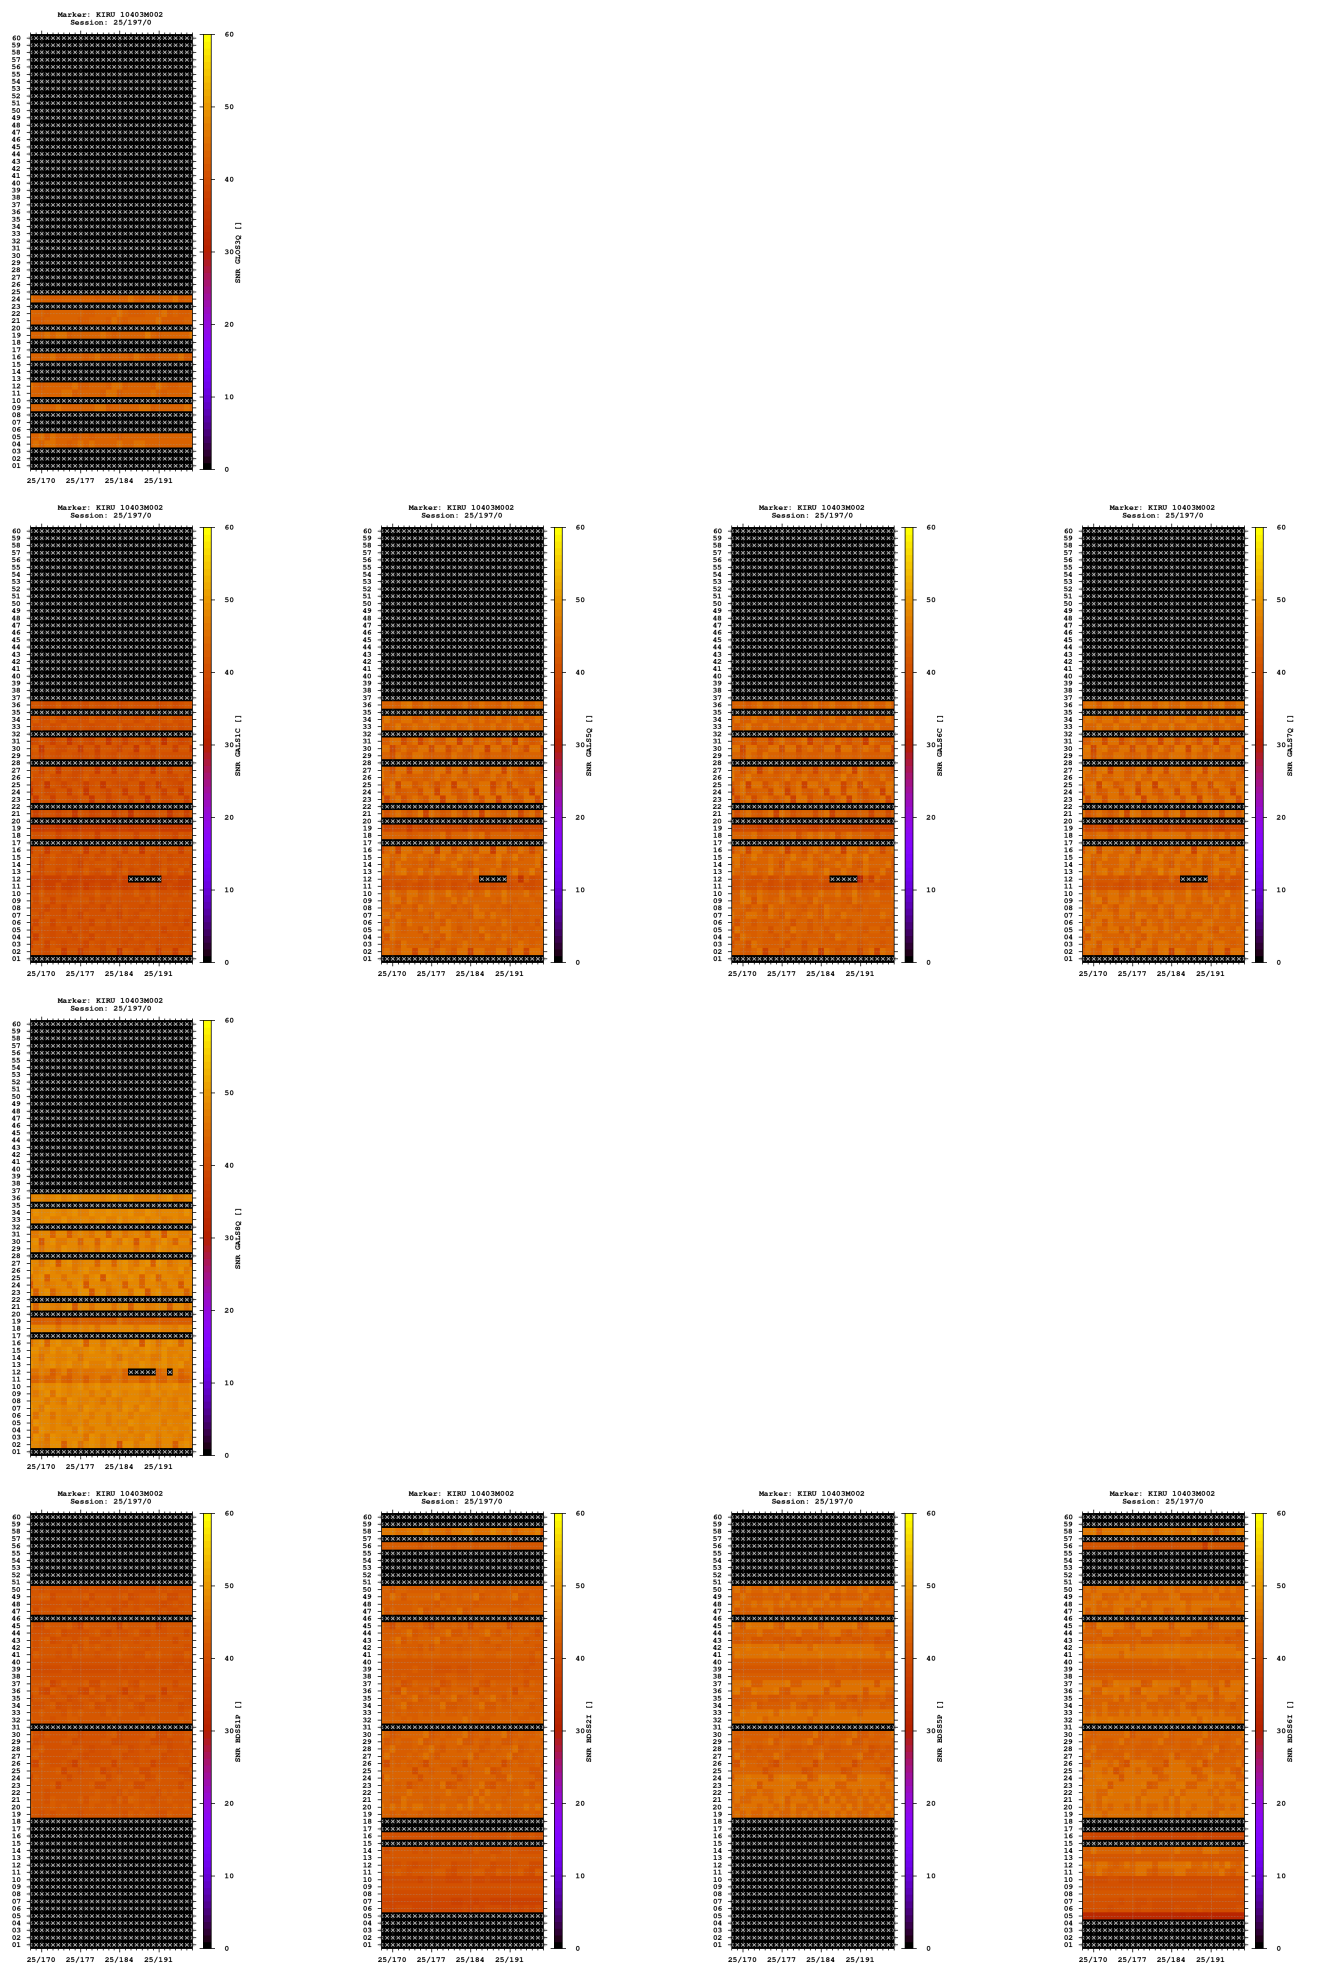


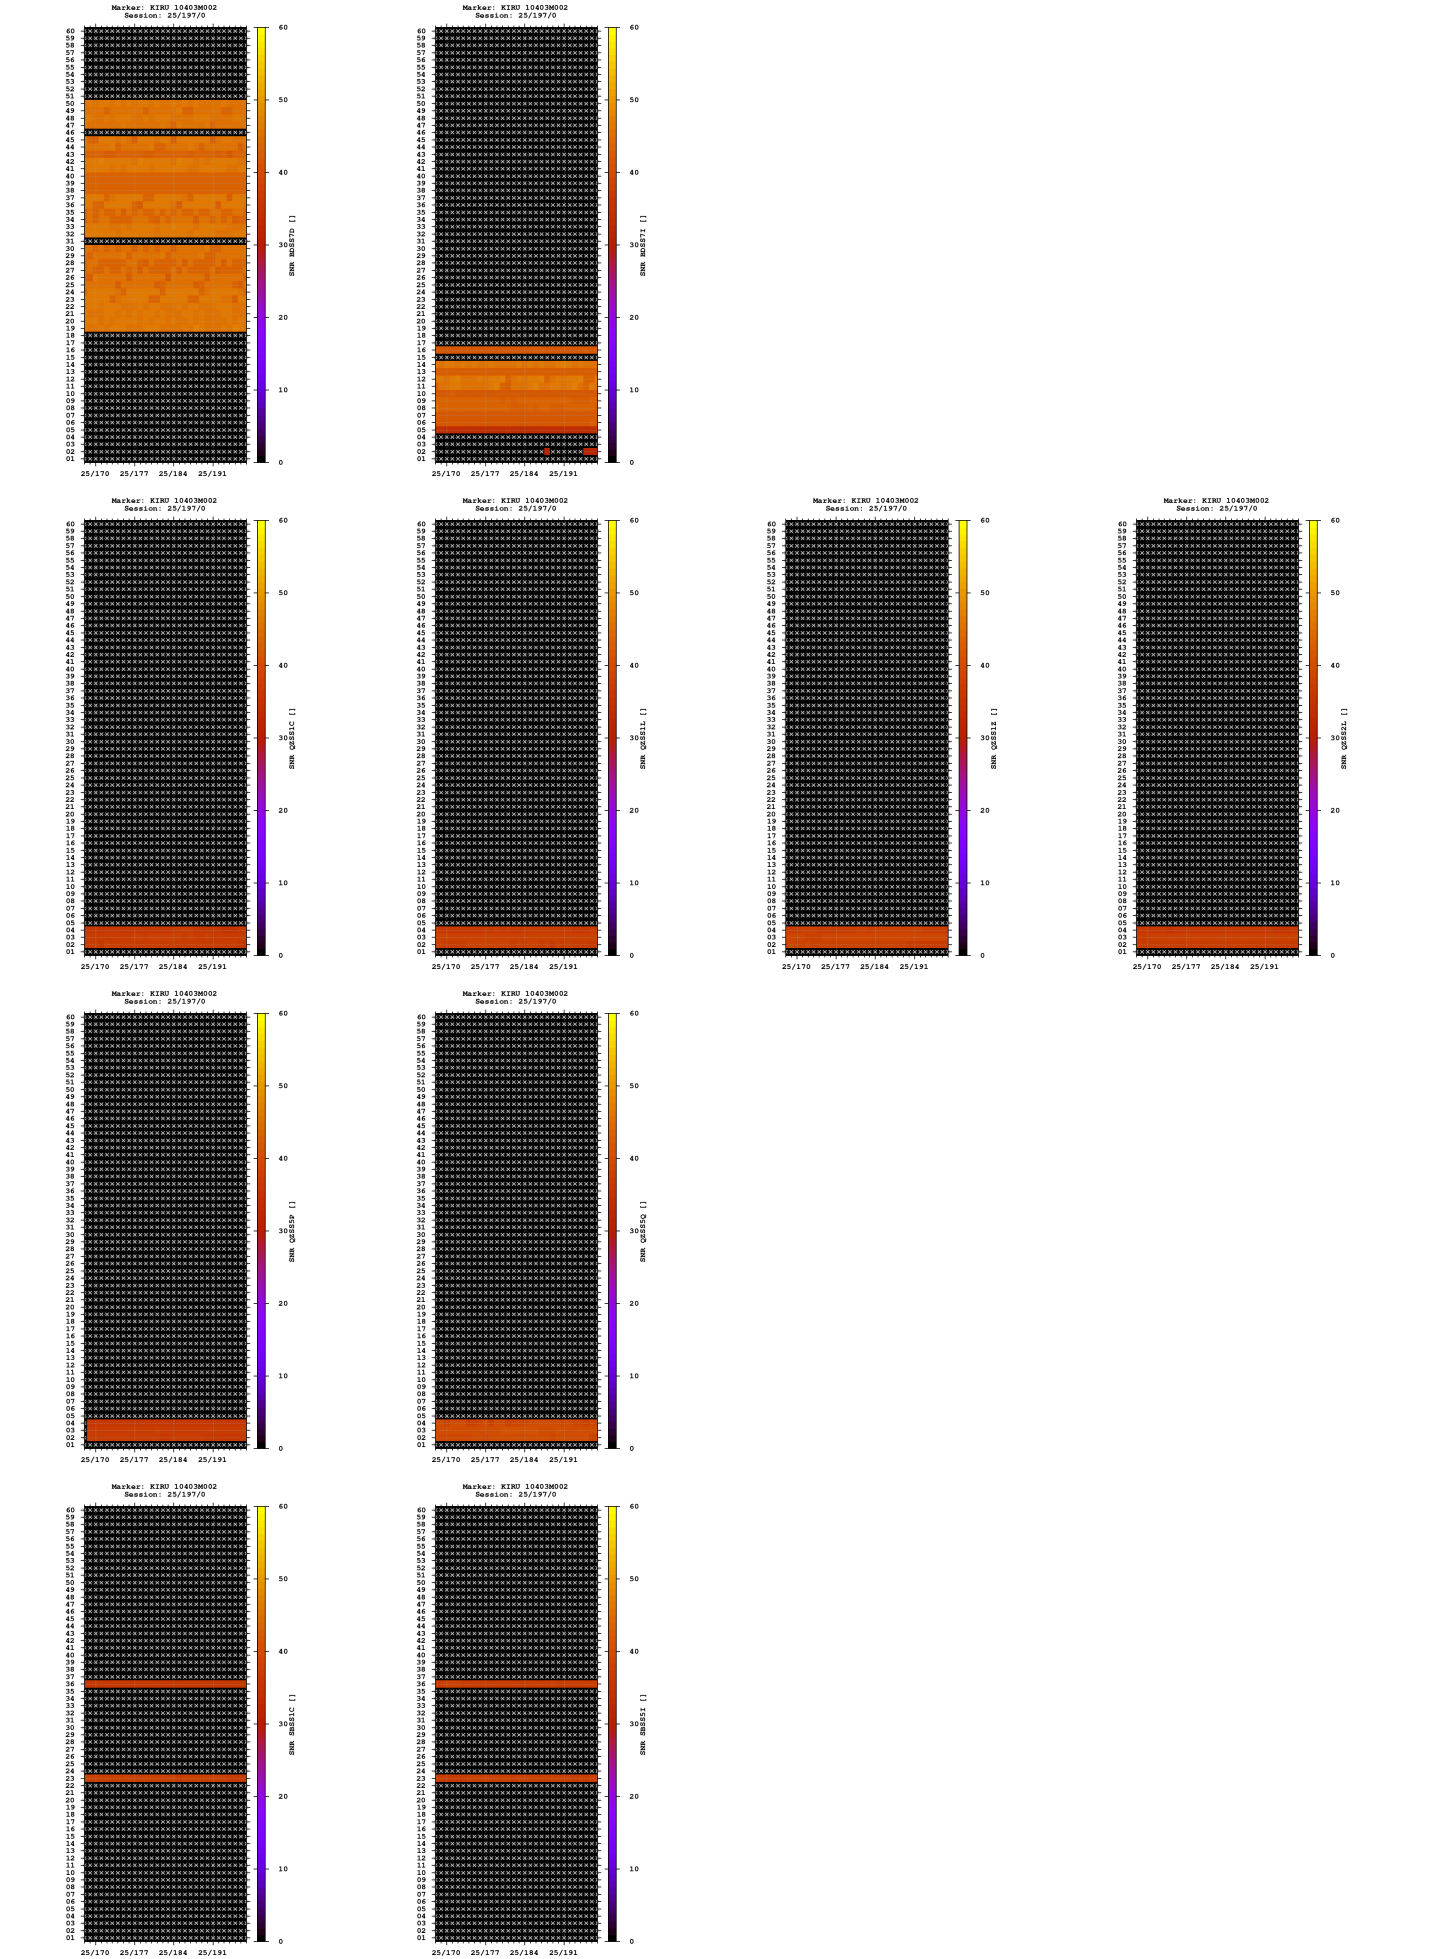

2025-07-16 00:00:00 GLO 2251420.4335 862815.9315 5885475.7983 67.857355140 20.968421718 389.8346

2025-07-16 00:00:00 GAL 2251420.5815 862817.8136 5885476.8957 67.857352107 20.968462224 391.1570

2025-07-16 00:00:00 BDS 2251420.3092 862817.9679 5885477.0976 67.857354443 20.968467962 391.2690

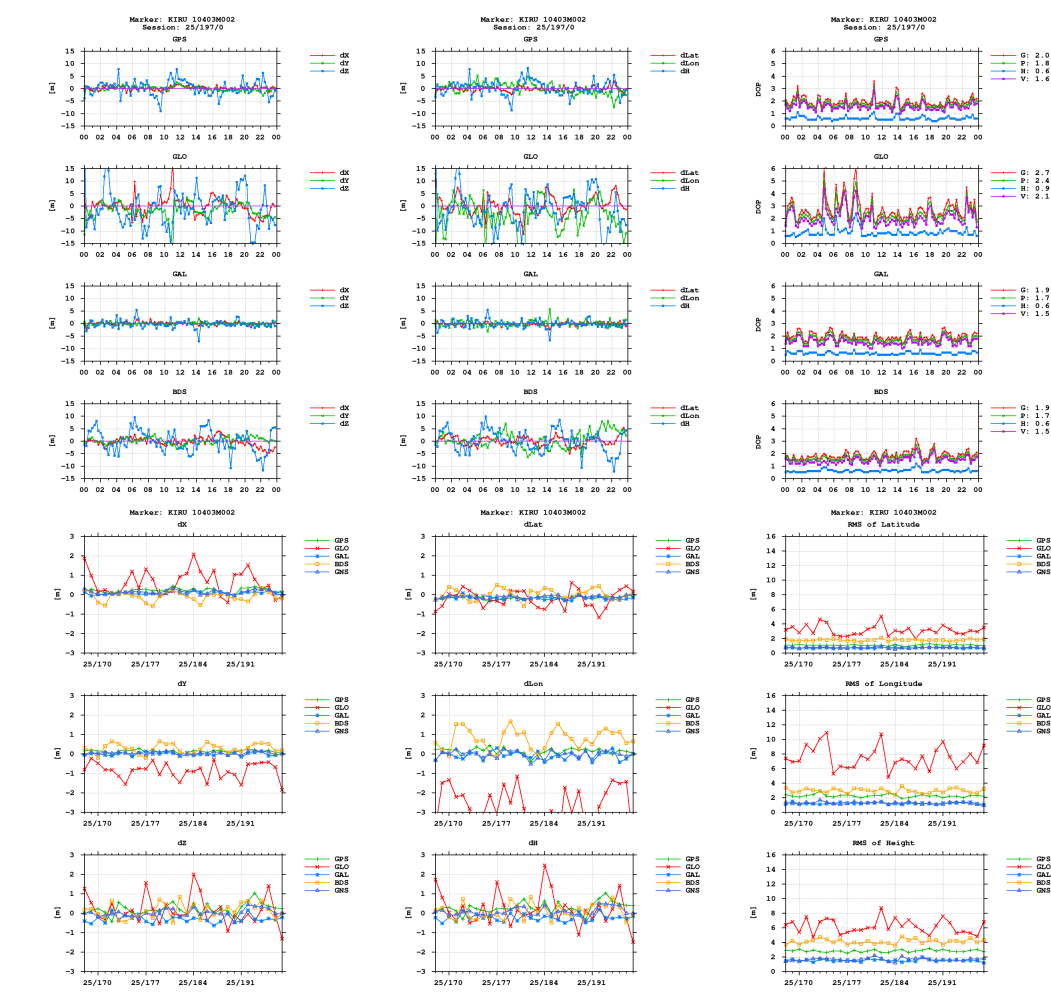

Equipment

2025-06-17 00:00:00 SEPT POLARX5TR 5.5.0 4701570 SEPT POLAR

Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)