

GNSS observation file monitoring for MTTI

Last RINEX file: MTTI1970.25D.Z


RINEX version: 3.04

Marker: MTTI

Receiver: 1873202 LEICA GR50 4.83/7.900

Antenna: 9500011 LEIAR25.R3 LEIT


Epochs

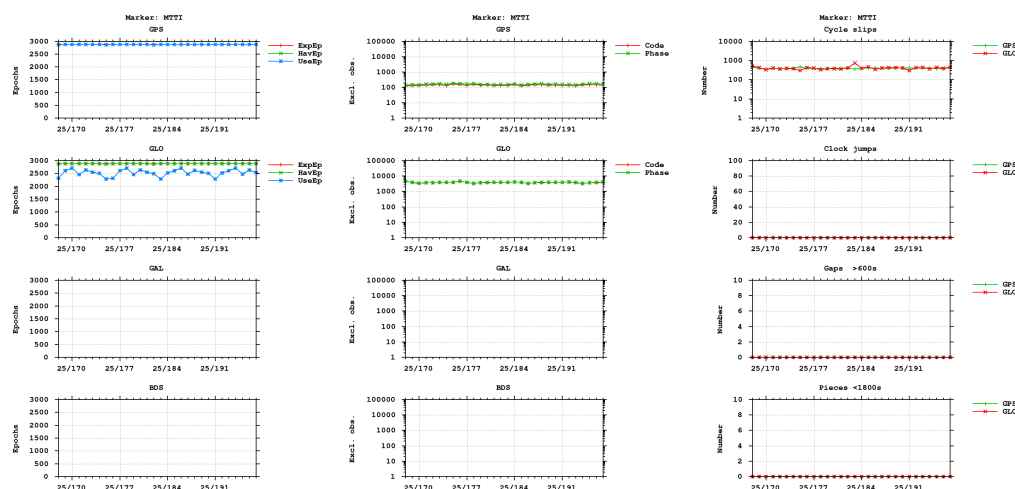


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

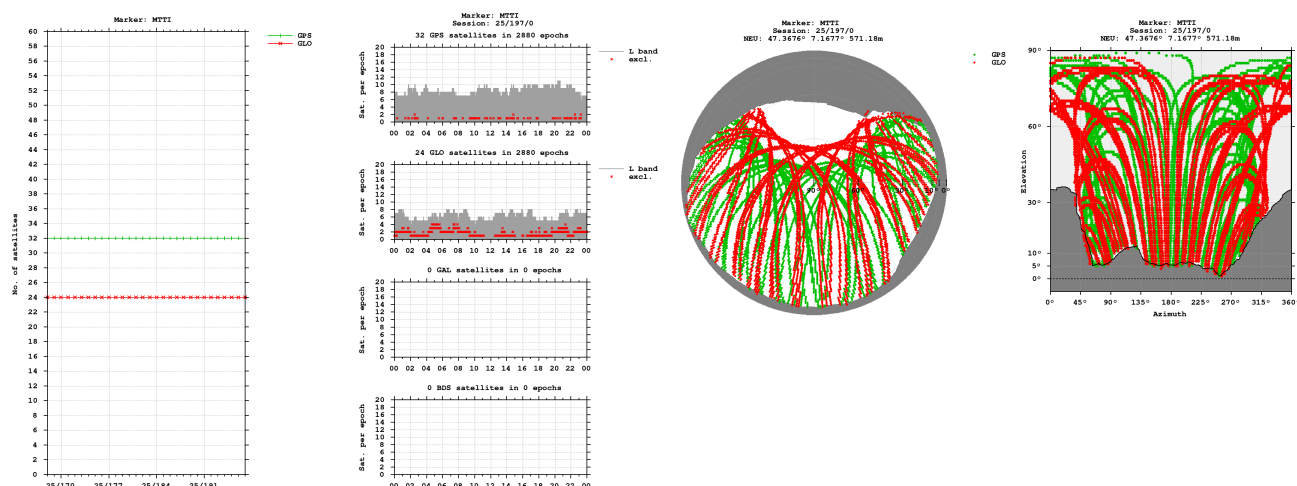


Bands

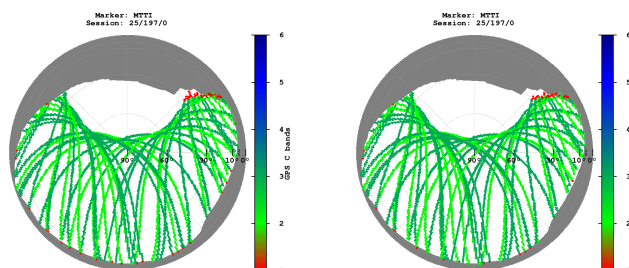


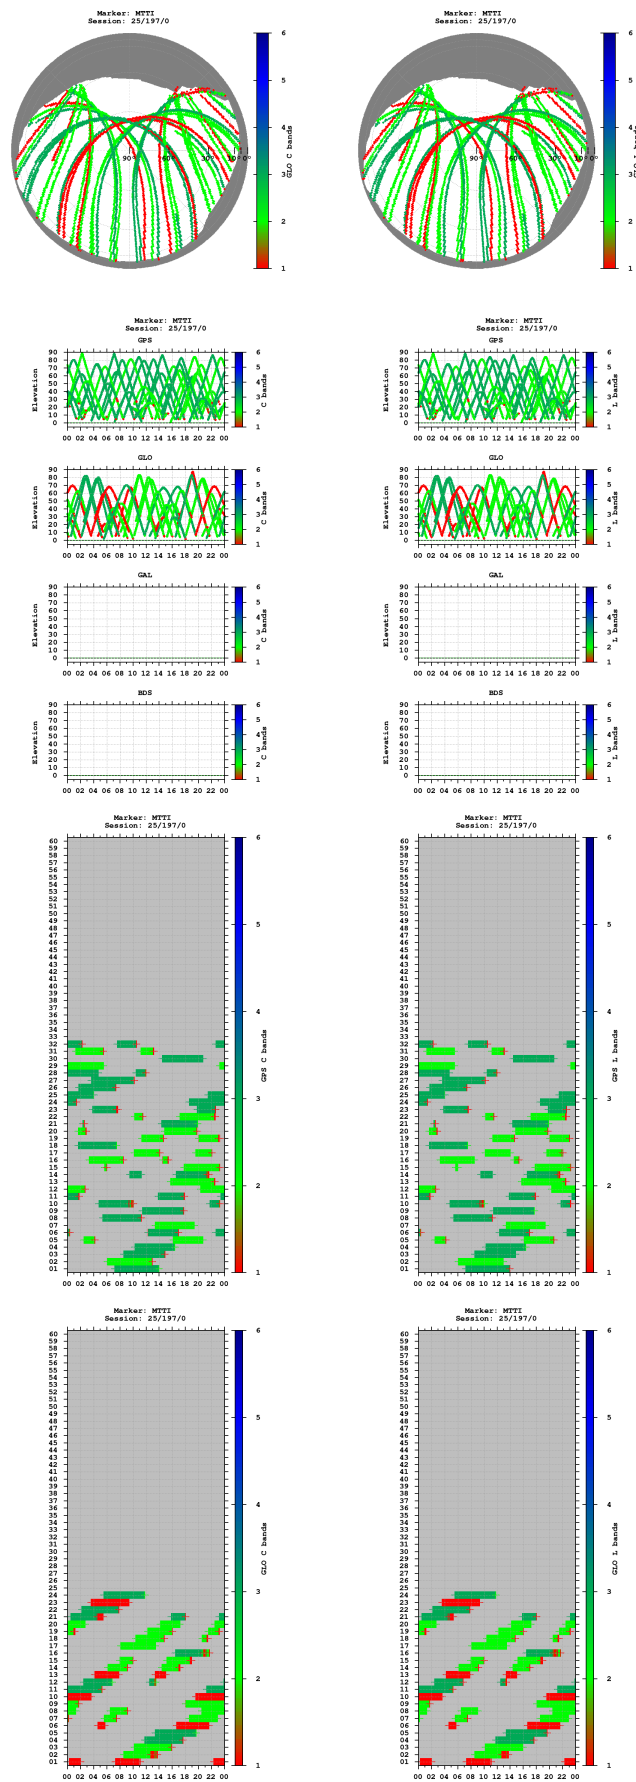


Observations

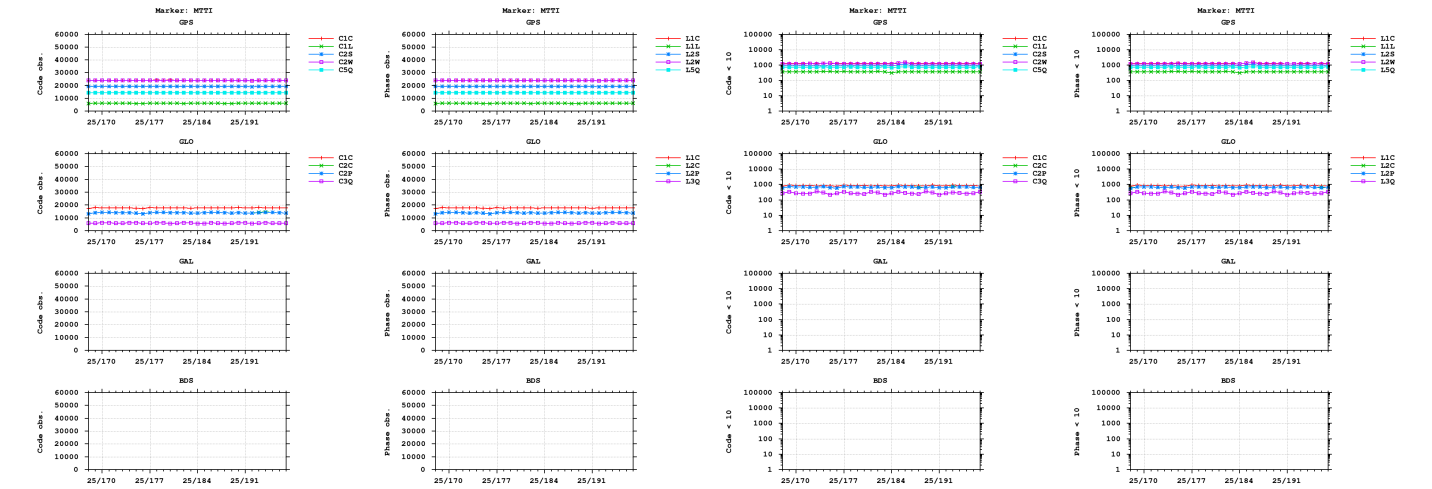



Cycle slips

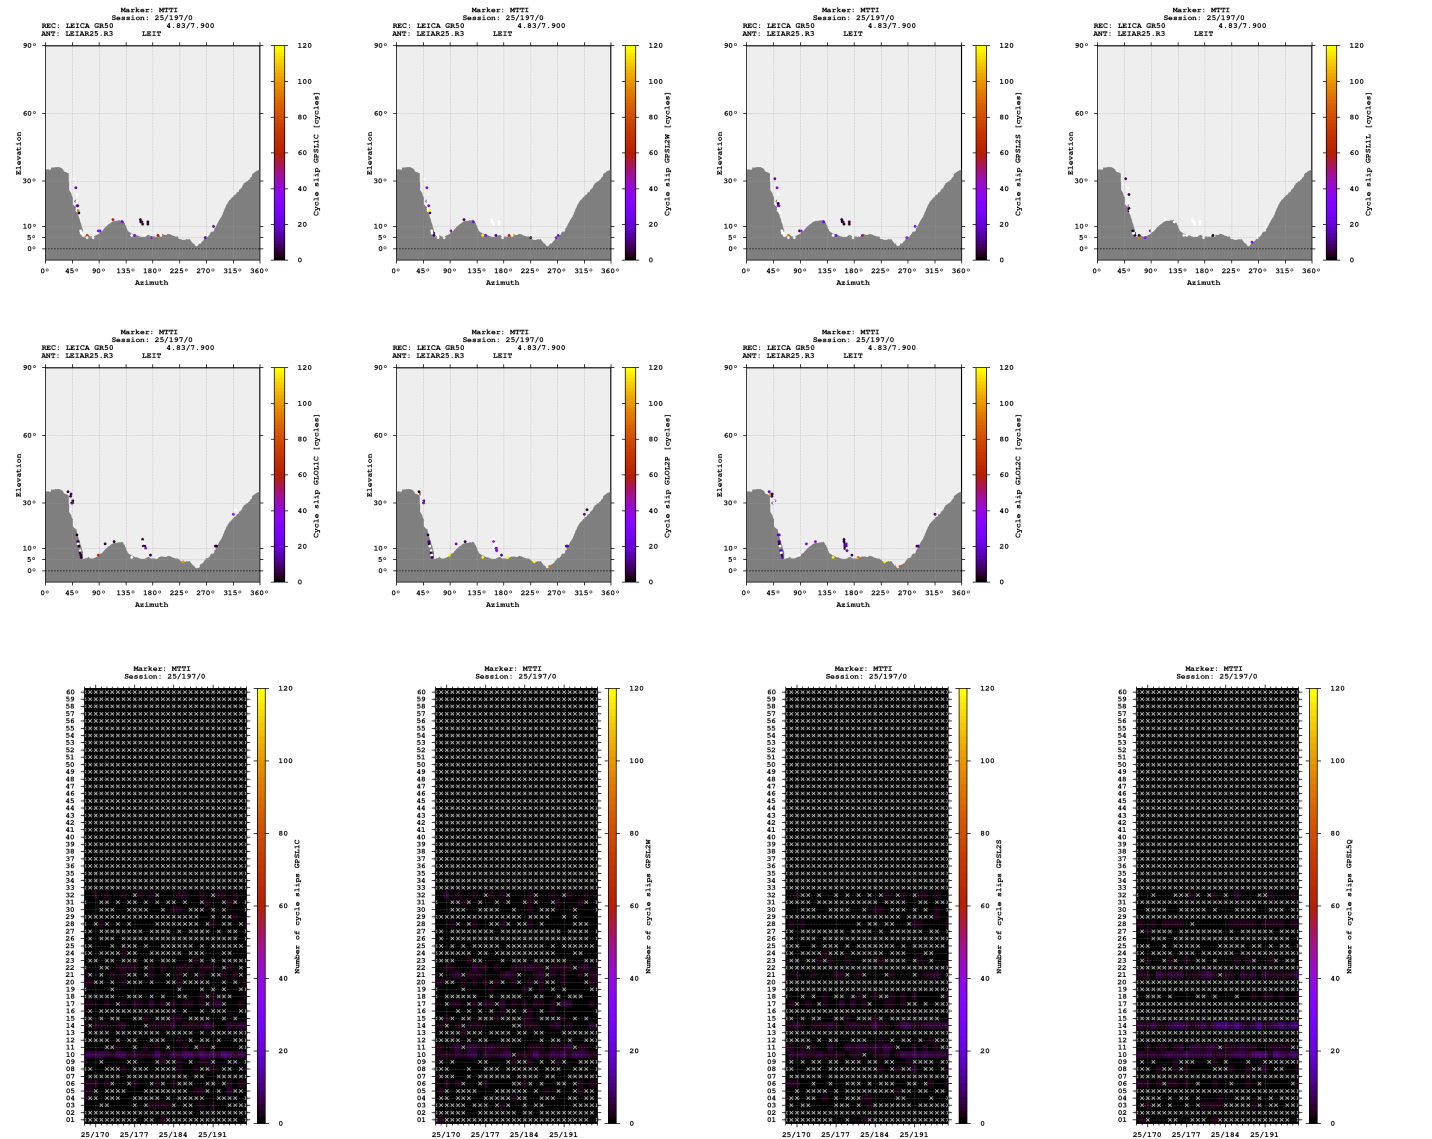

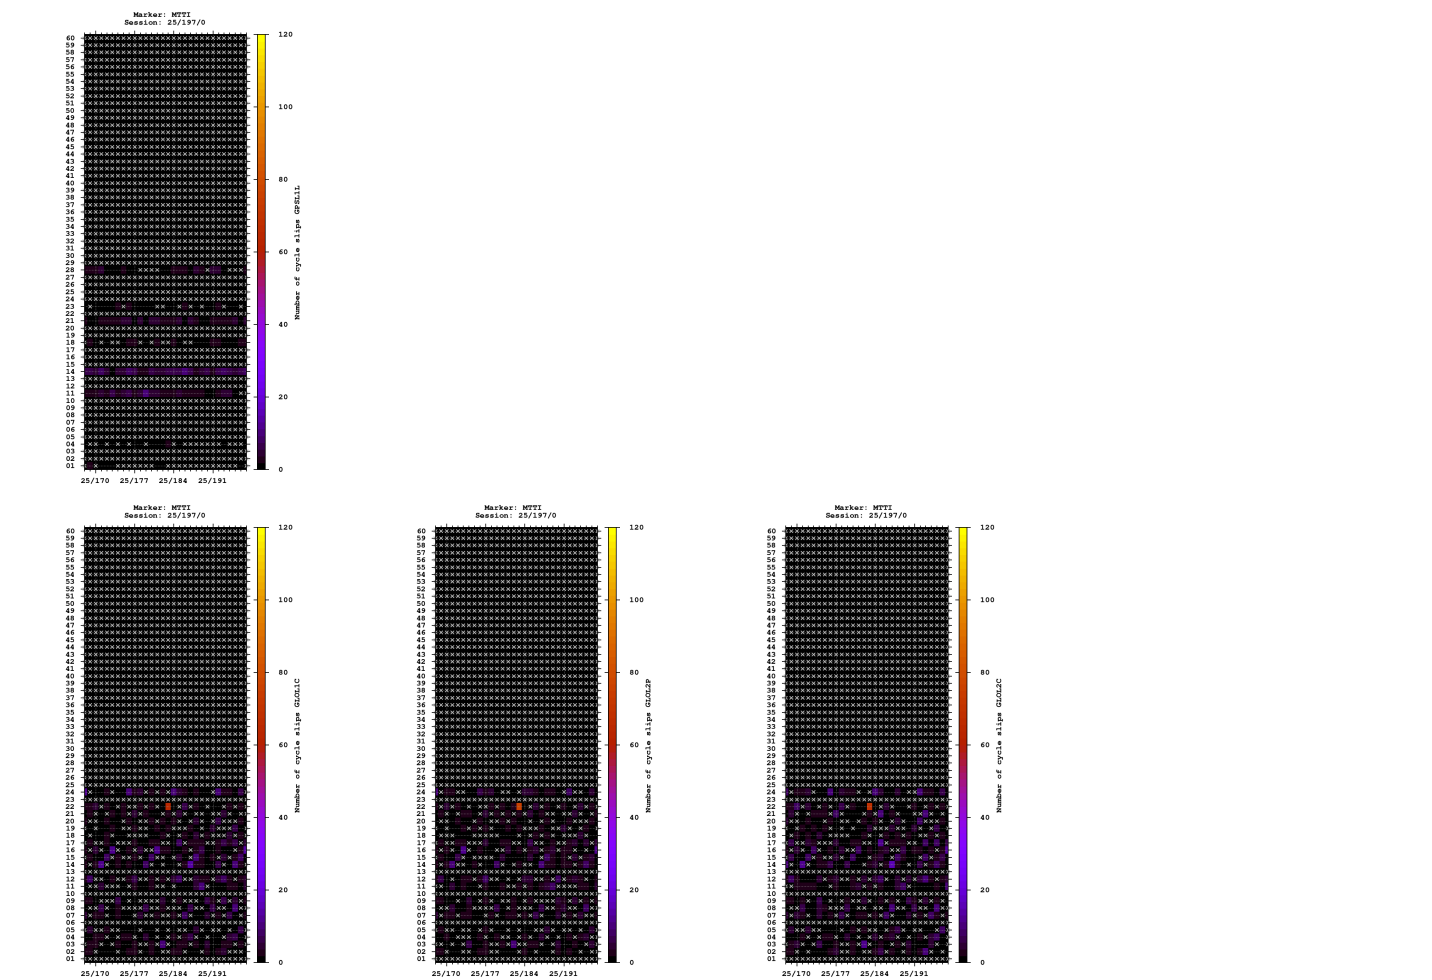



Multipath

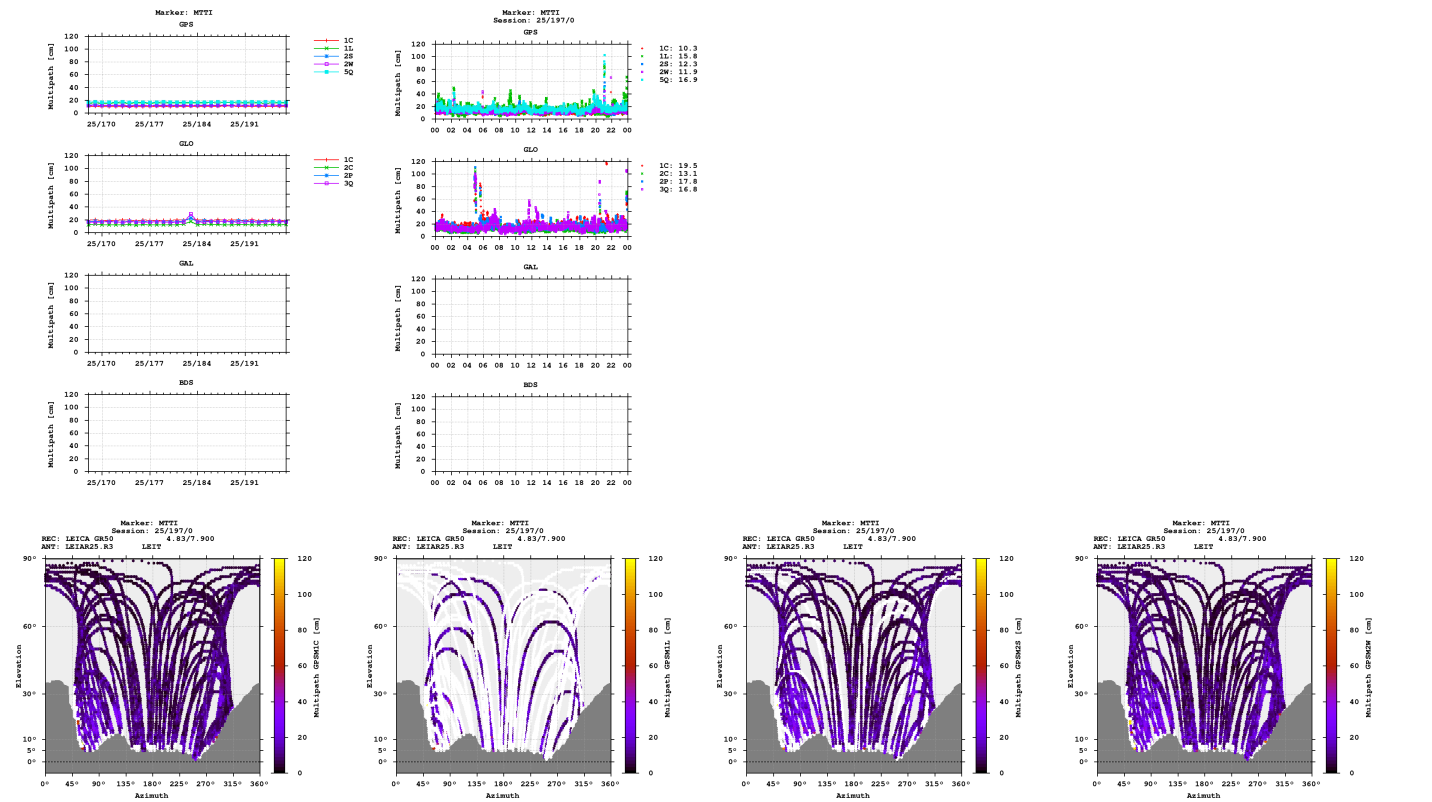


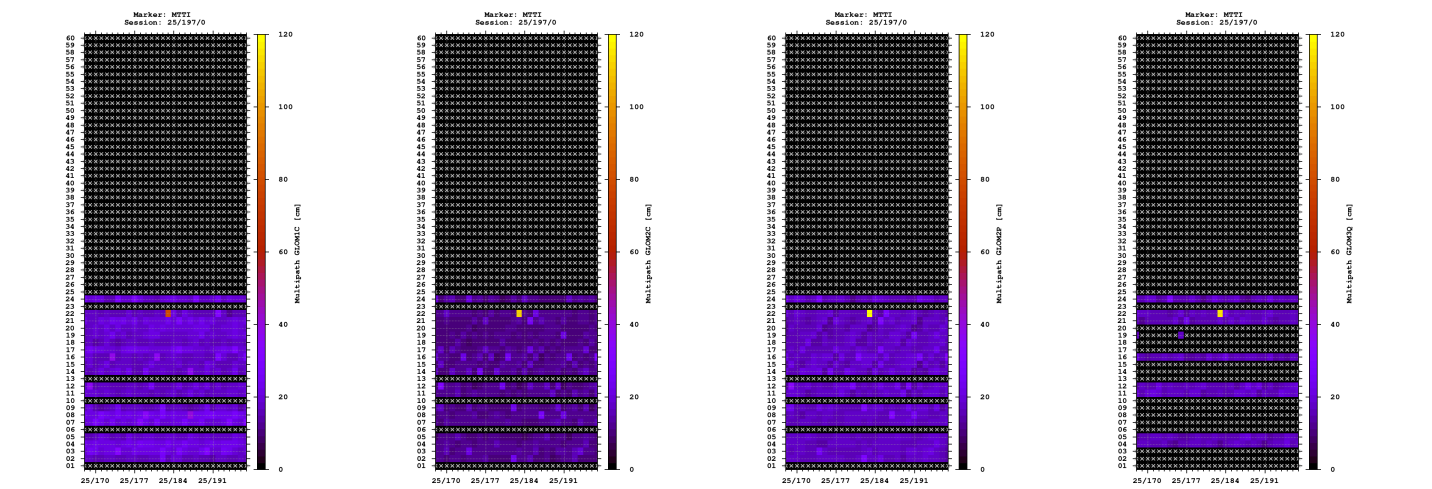

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

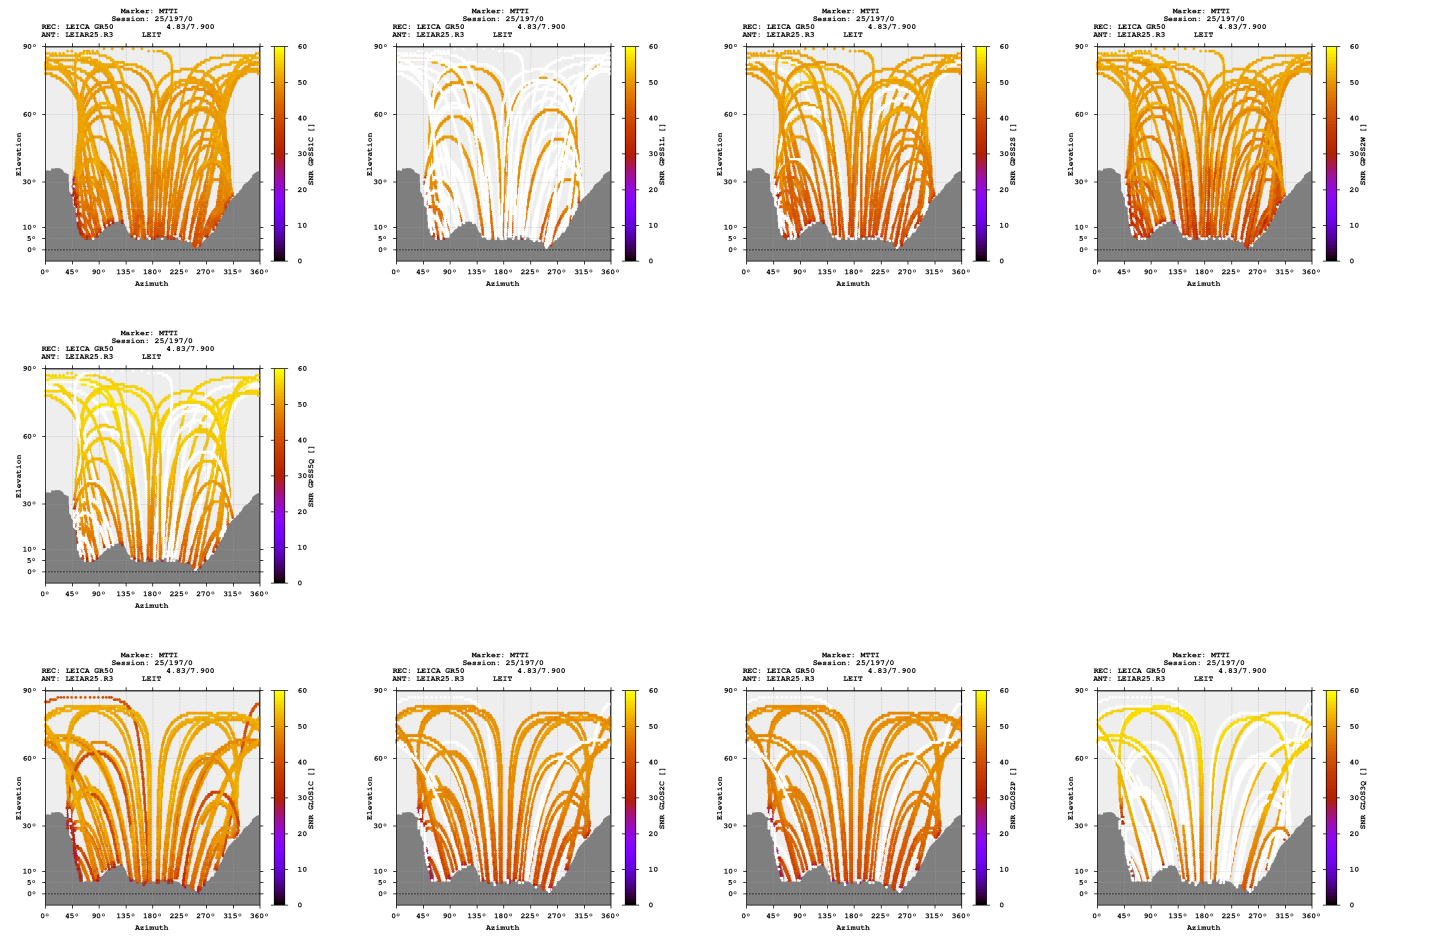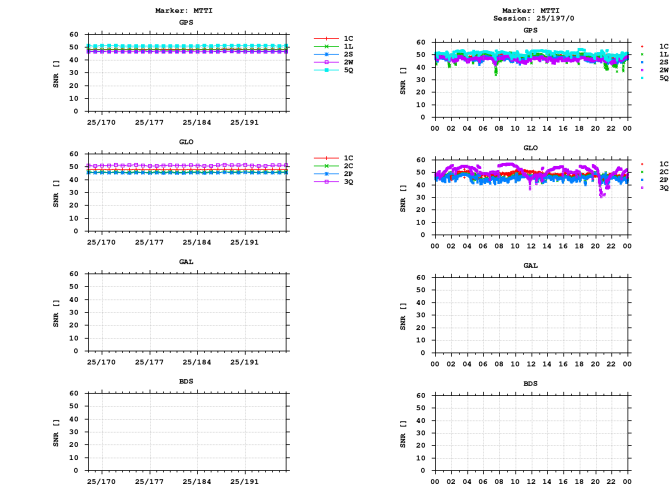

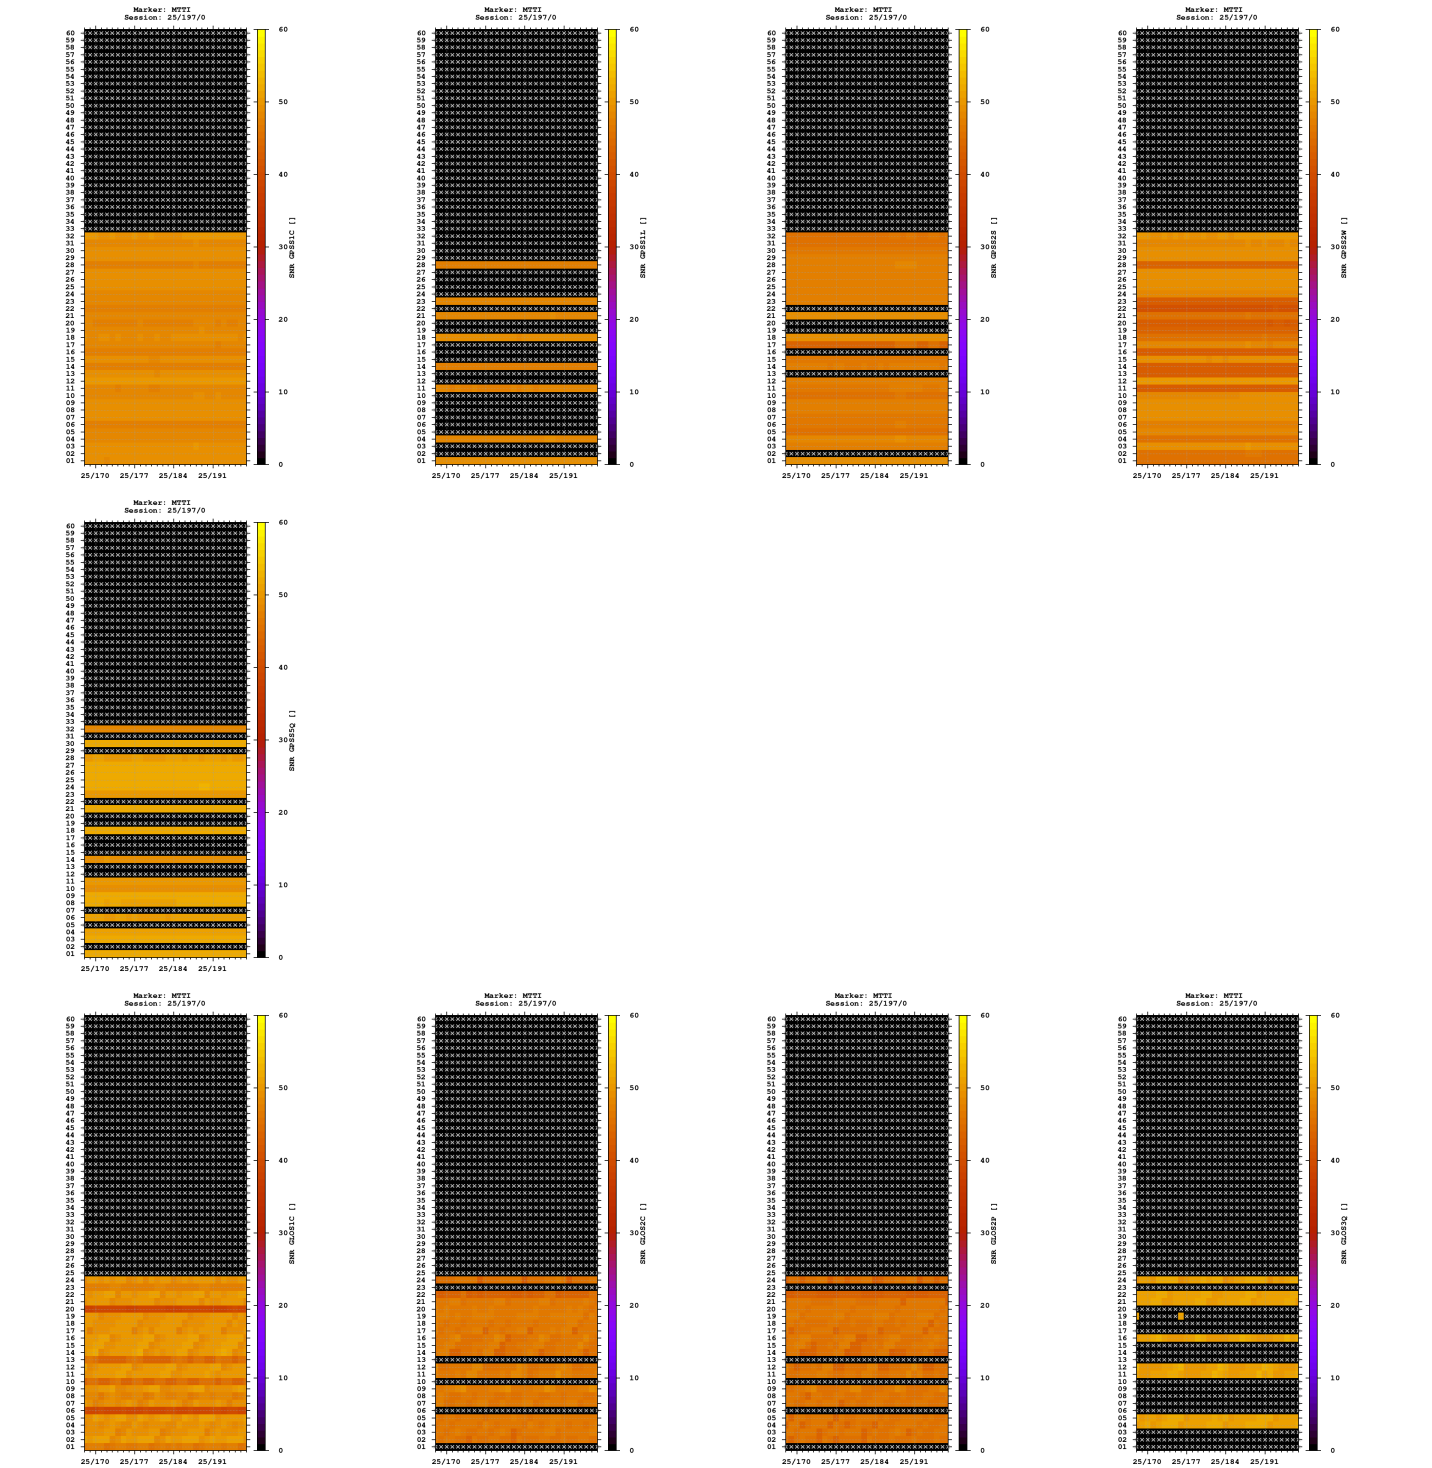

Estimates

2025-07-16 00:00:00 GPS 4294270.3049 540036.7767 4669963.1030 47.367632487 7.167747229 571.1768
2025-07-16 00:00:00 GLO 4294273.3078 540036.3710 4669963.2910 47.367614253 7.167736941 573.2988

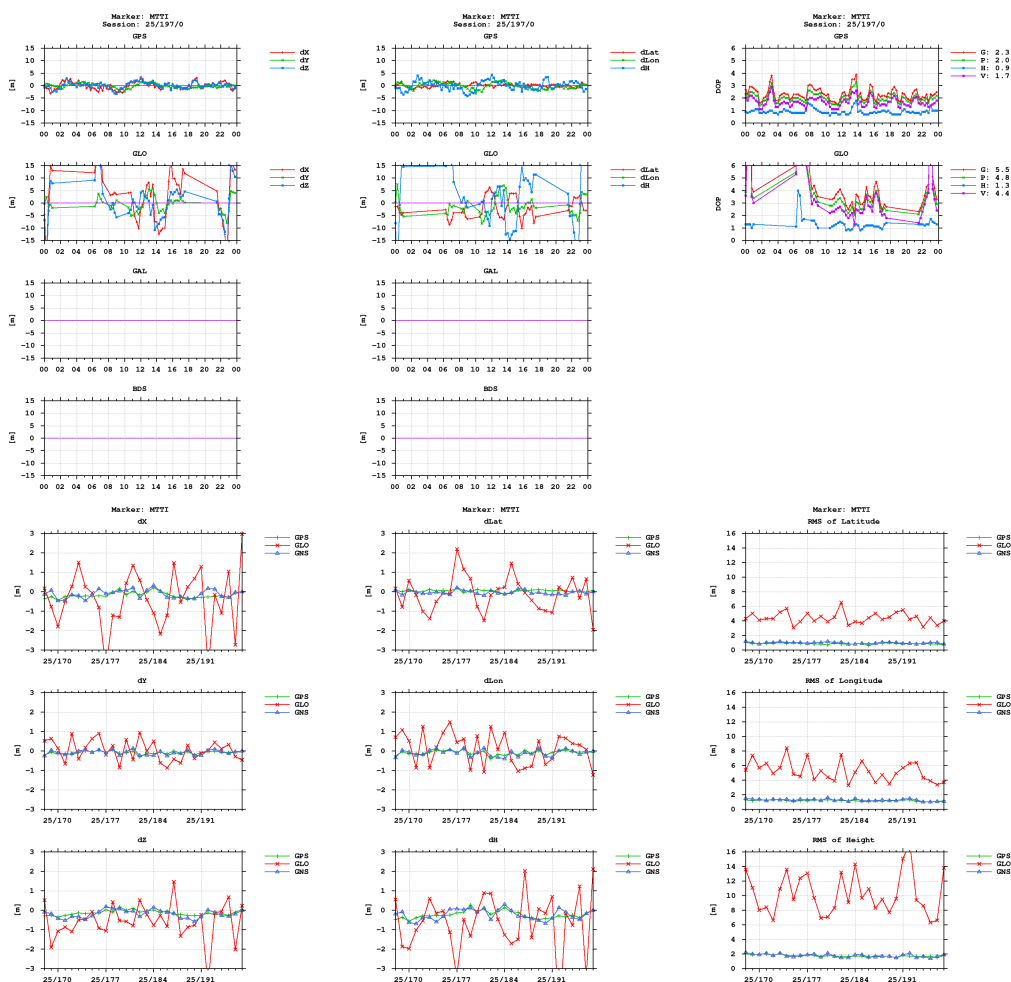

Equipment

2025-06-17 00:00:00 LEICA GR50 4.83/7.900 1873202 LEICA GR50

Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)