

GNSS observation file monitoring for NEUC

Last RINEX file: NEUC1970.25D.Z


RINEX version: 3.04

Marker: NEUC

Receiver: 1873119 LEICA GR50 4.83/7.900

Antenna: 5409354969 TRM59800.00 NONE


Epochs

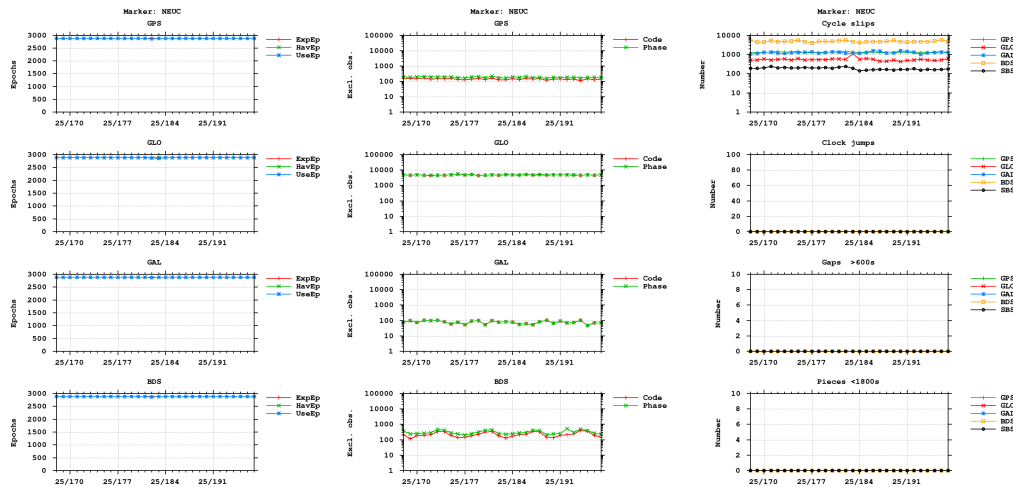


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.










- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

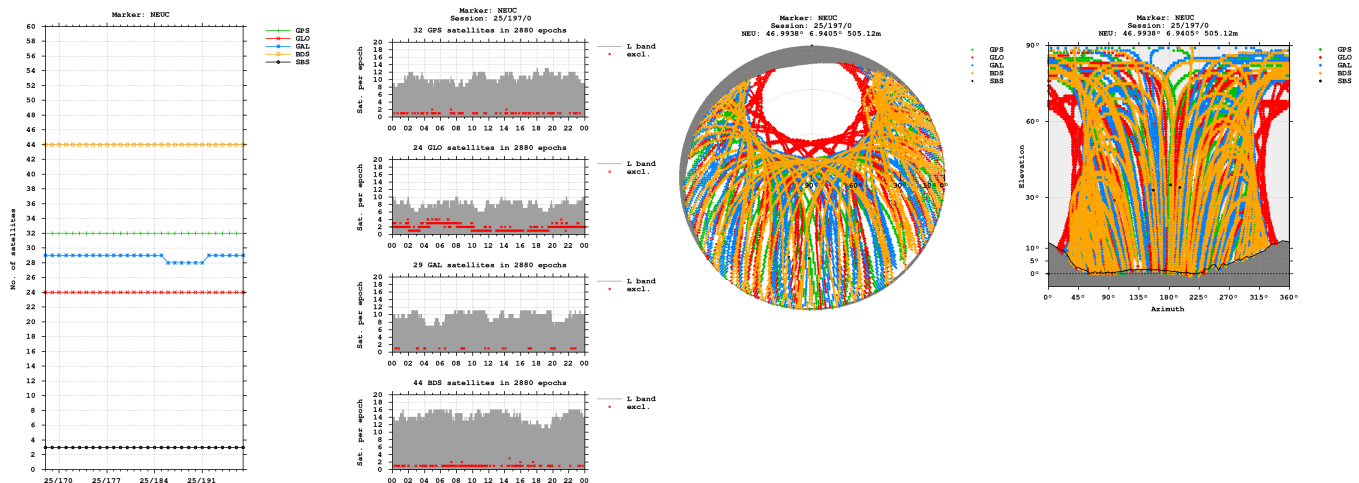


Bands

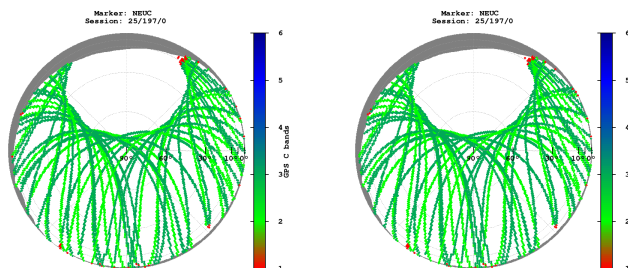


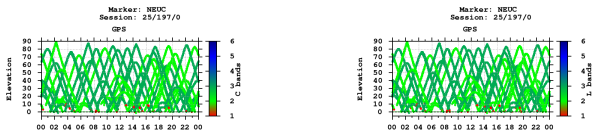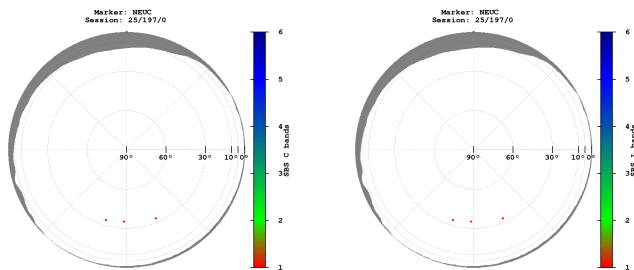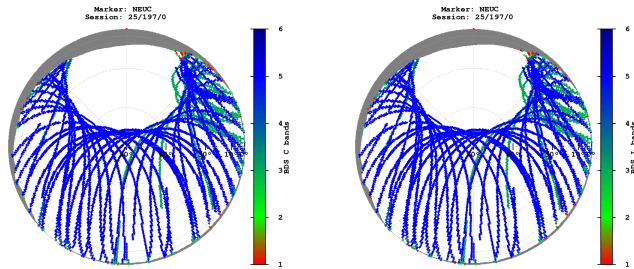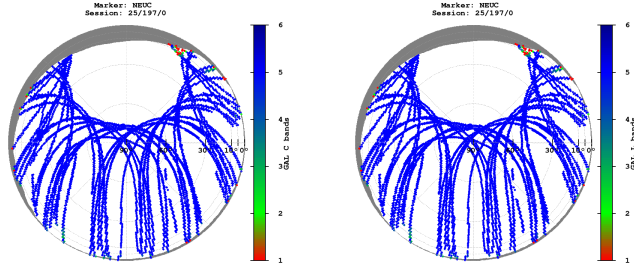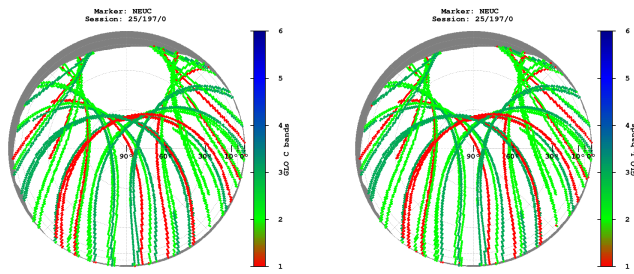

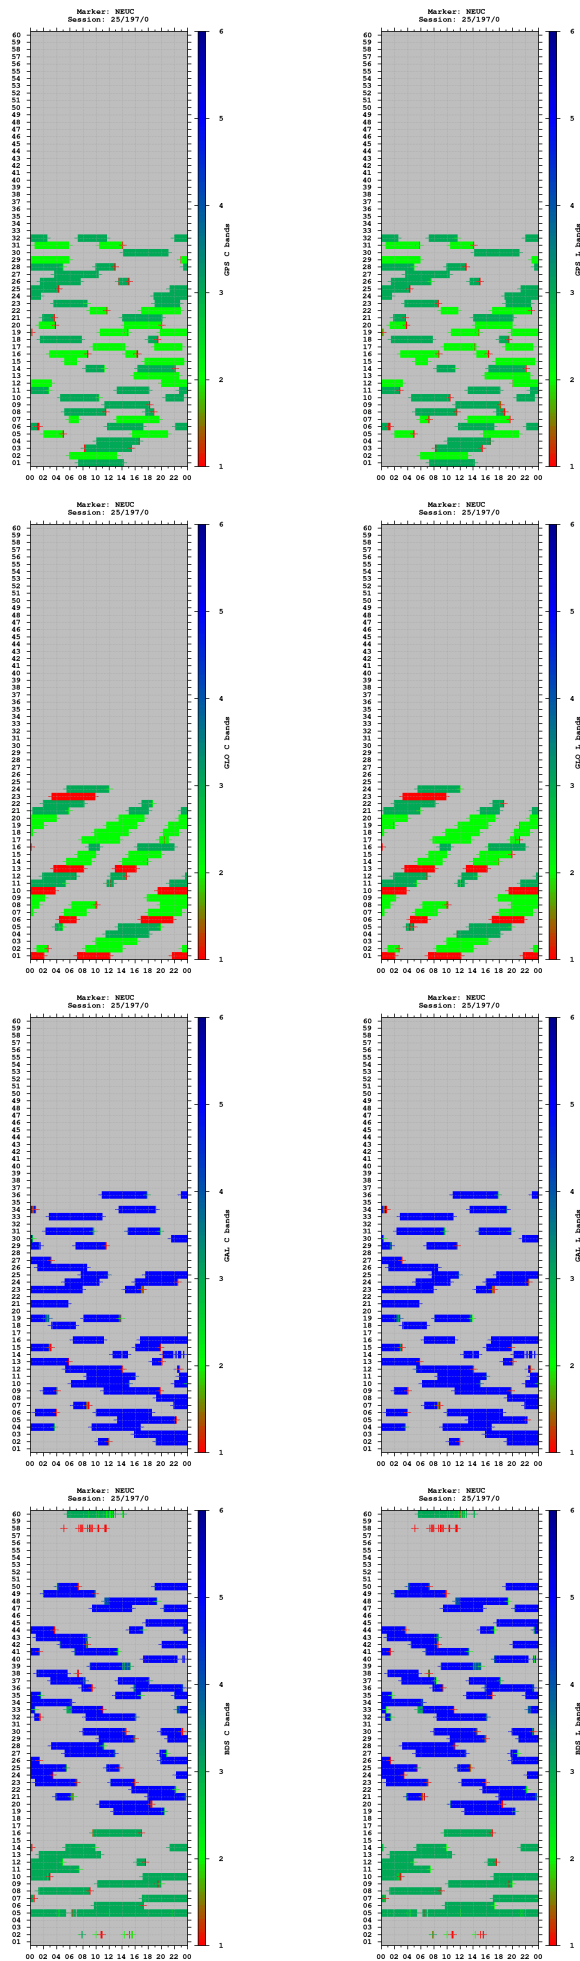


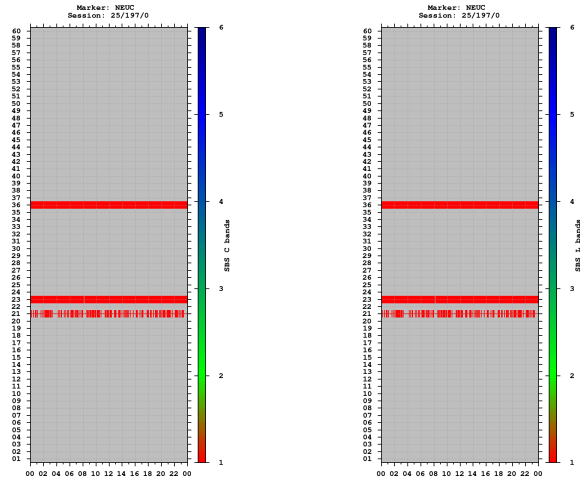


Observations

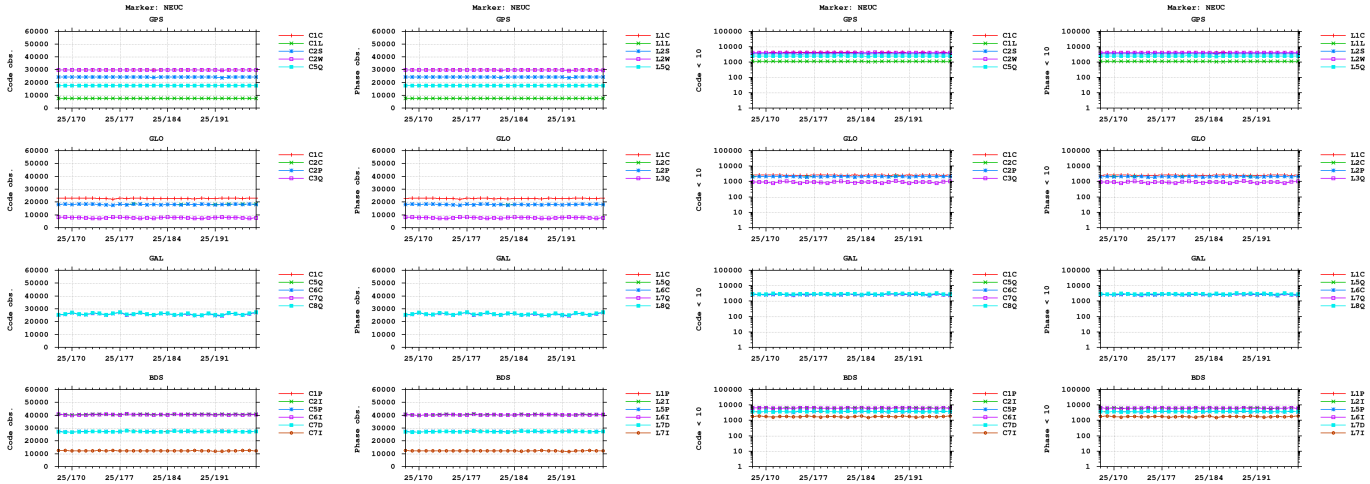


Cycle slips

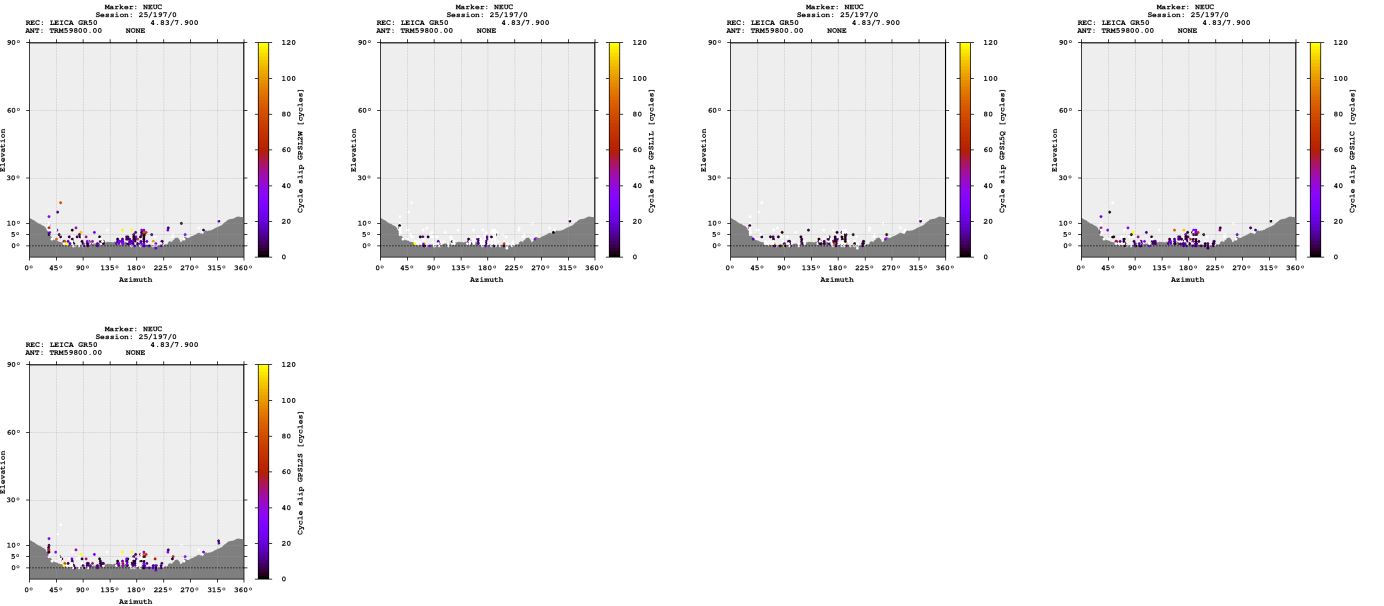





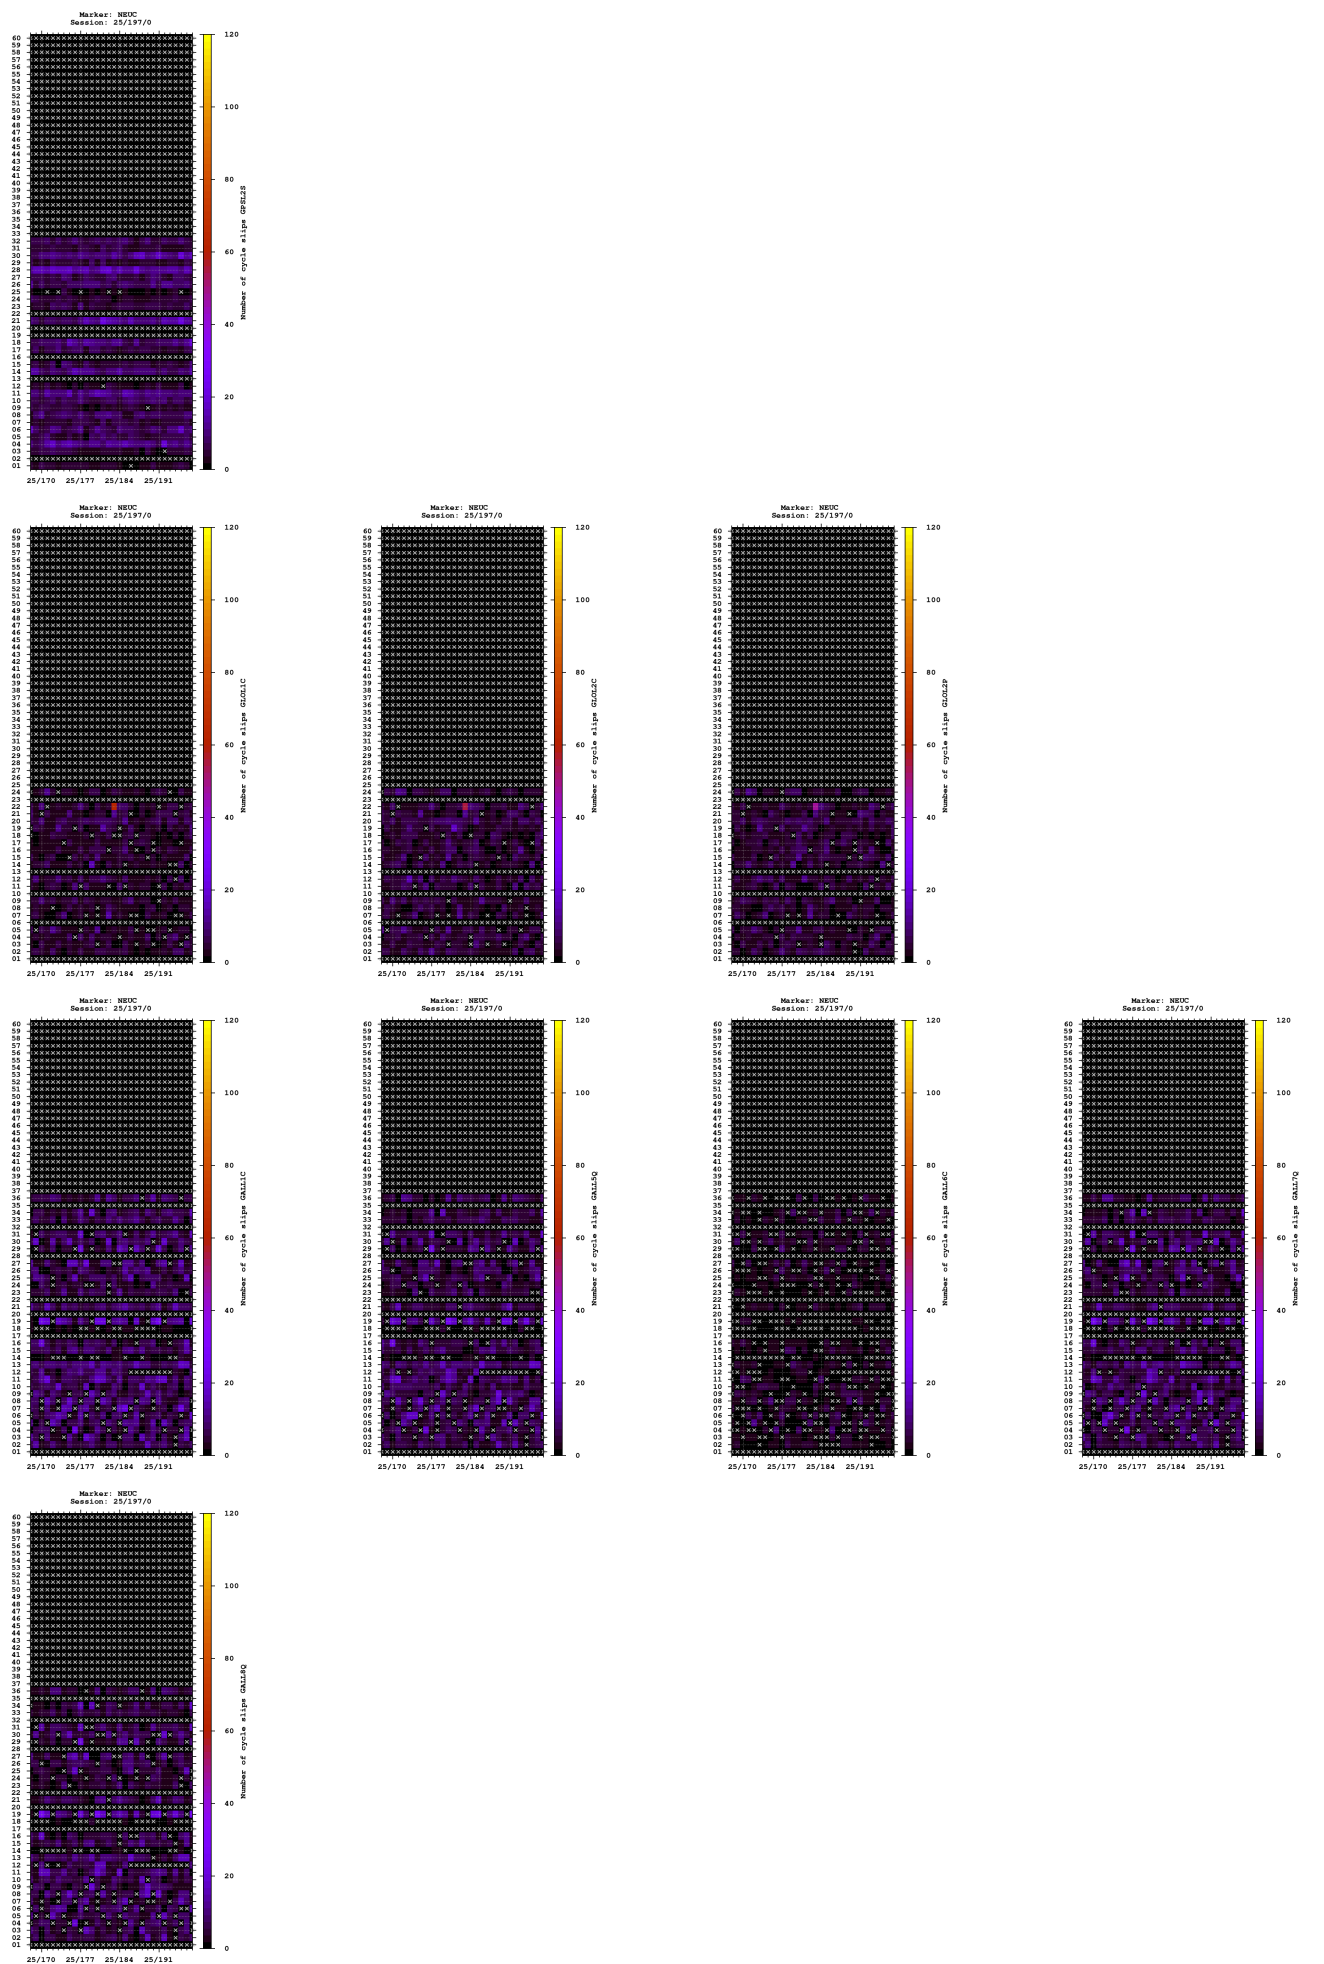


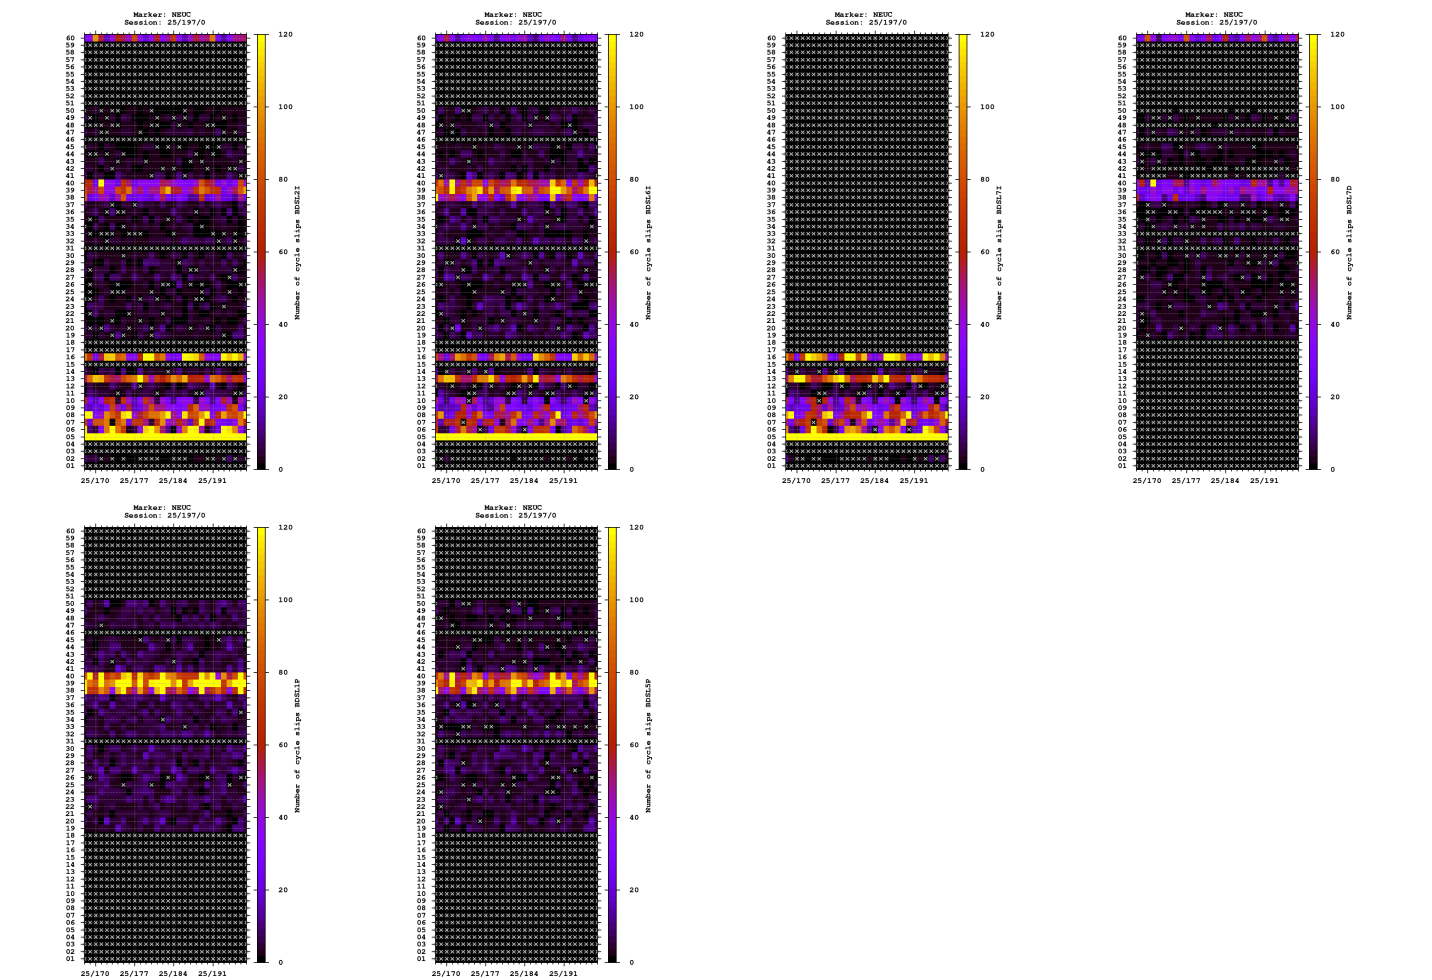


Multipath

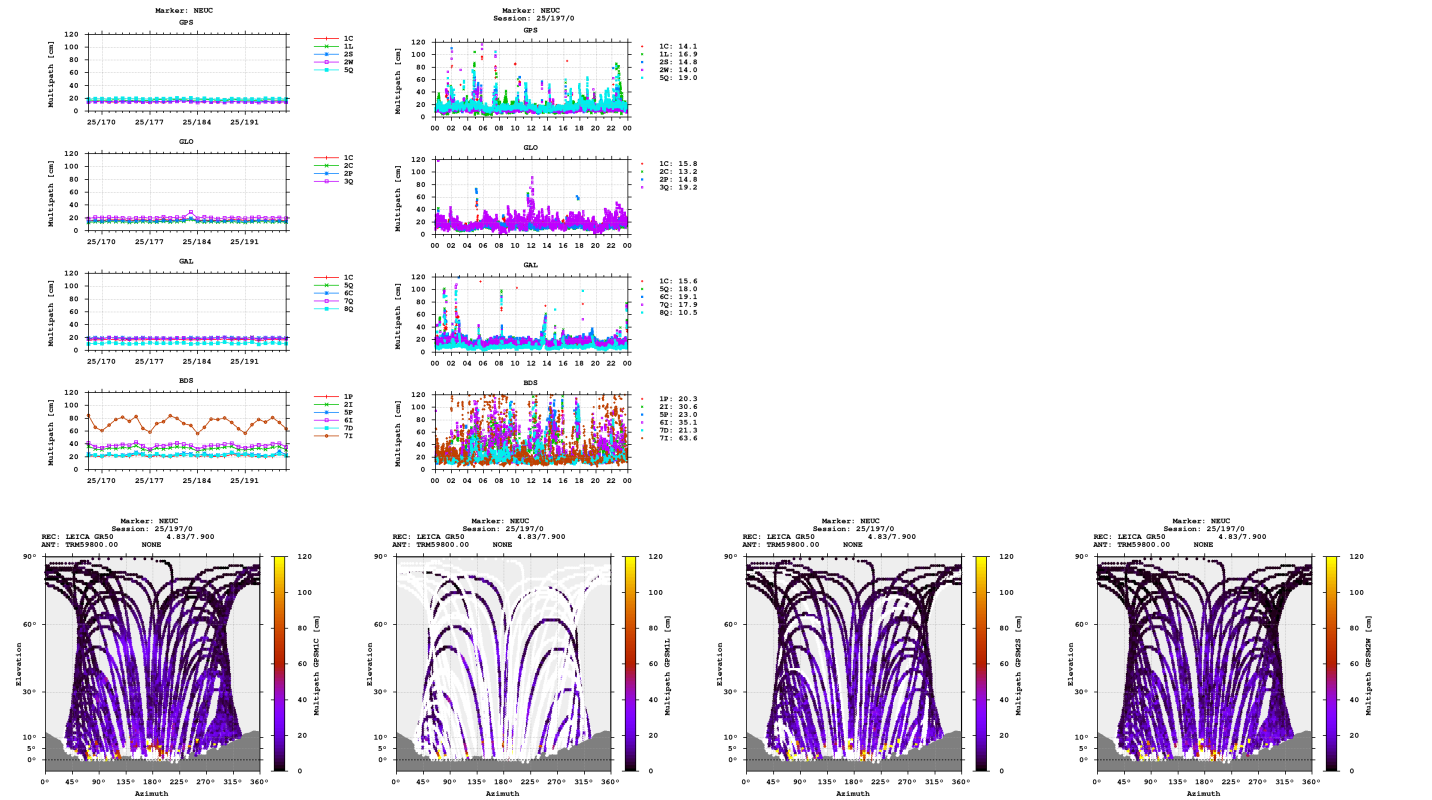

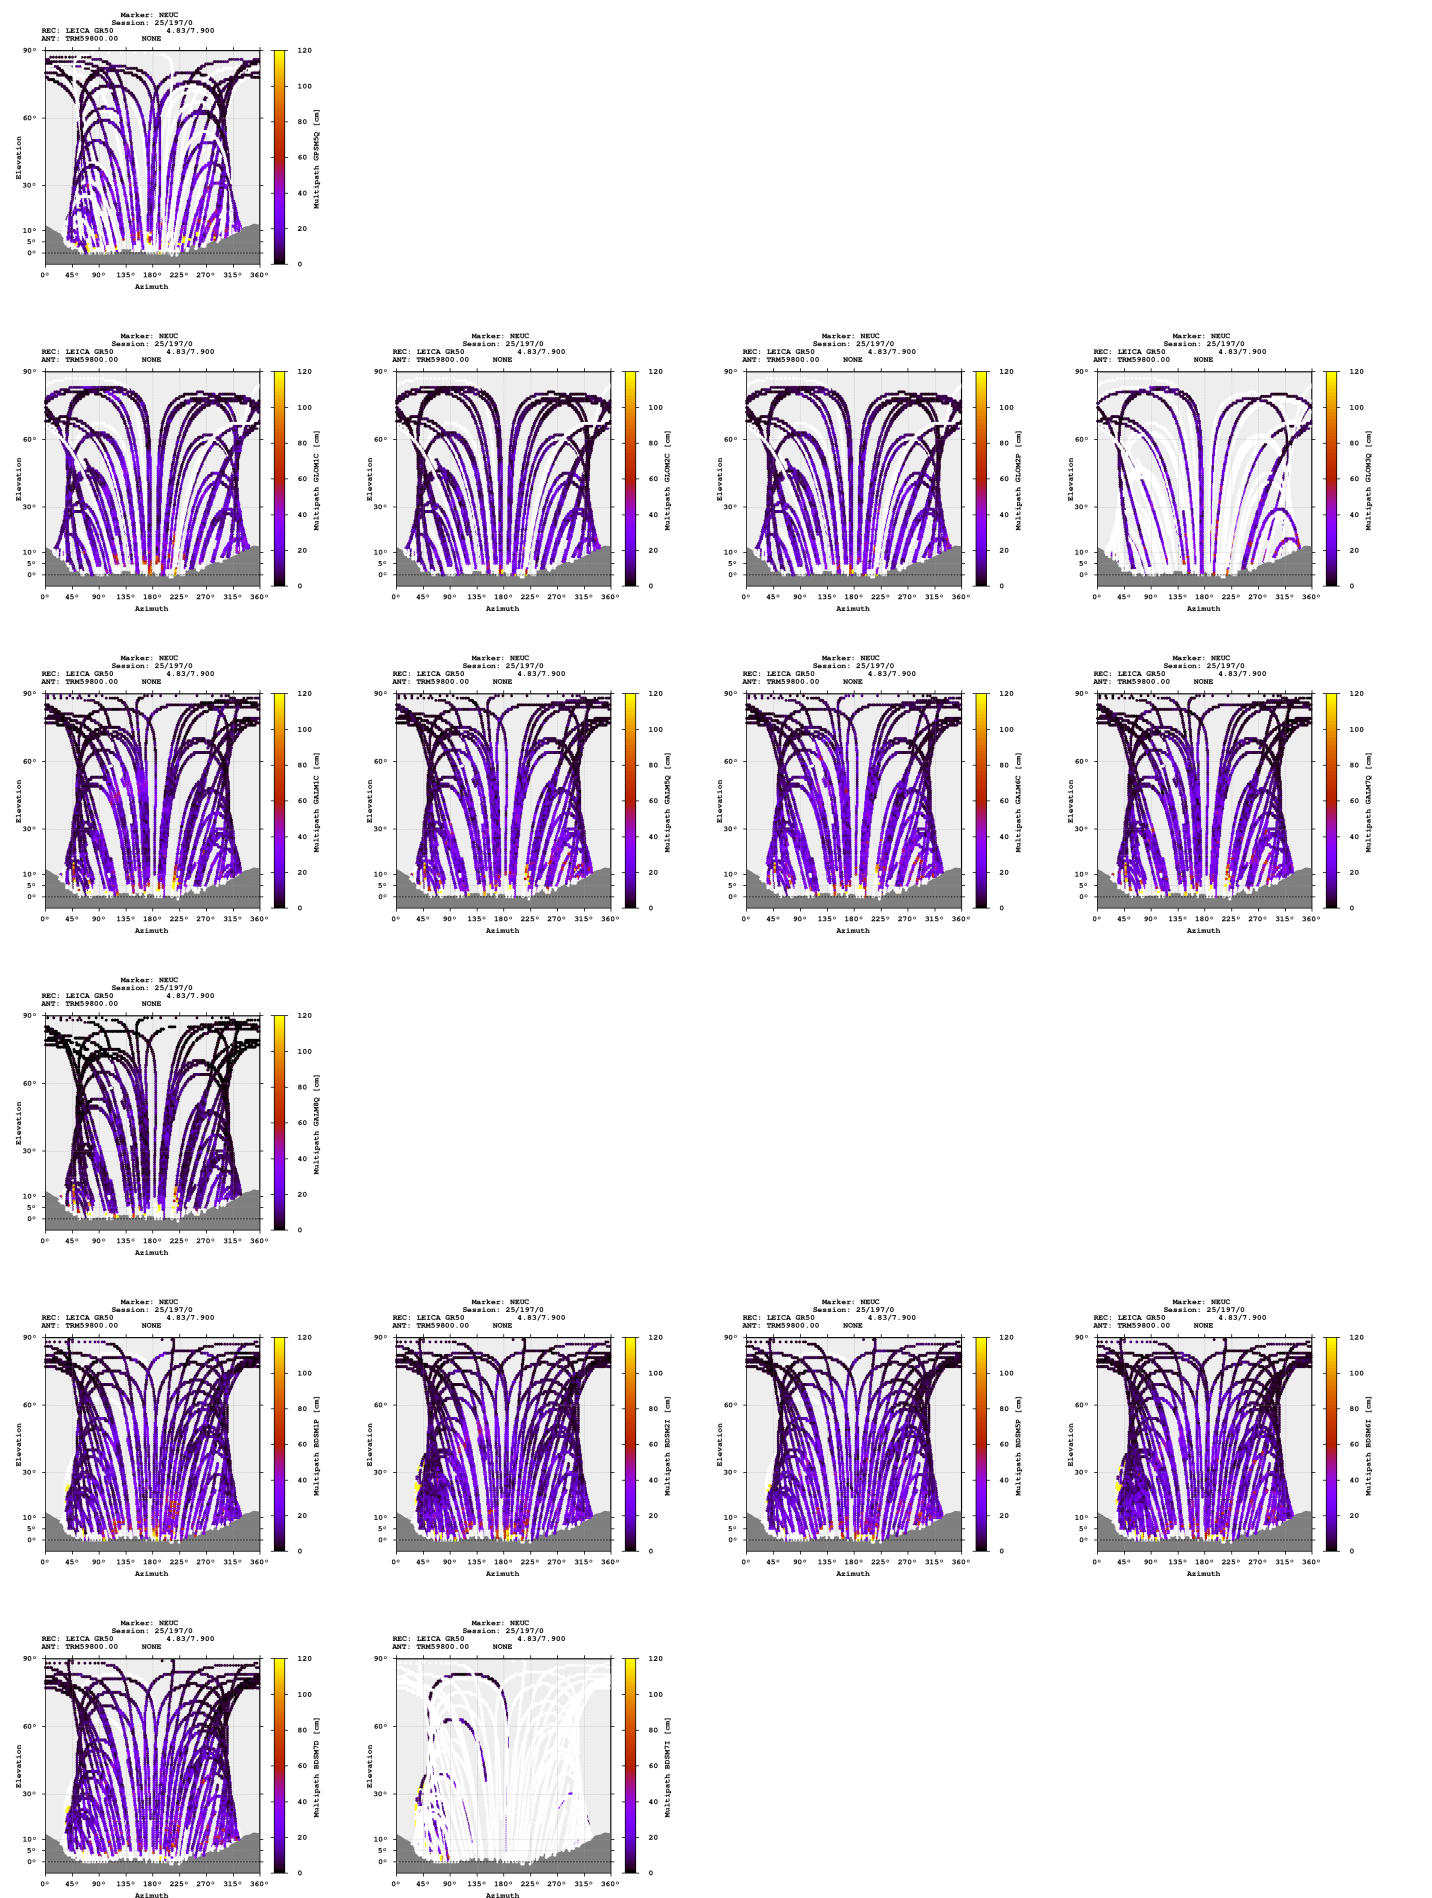


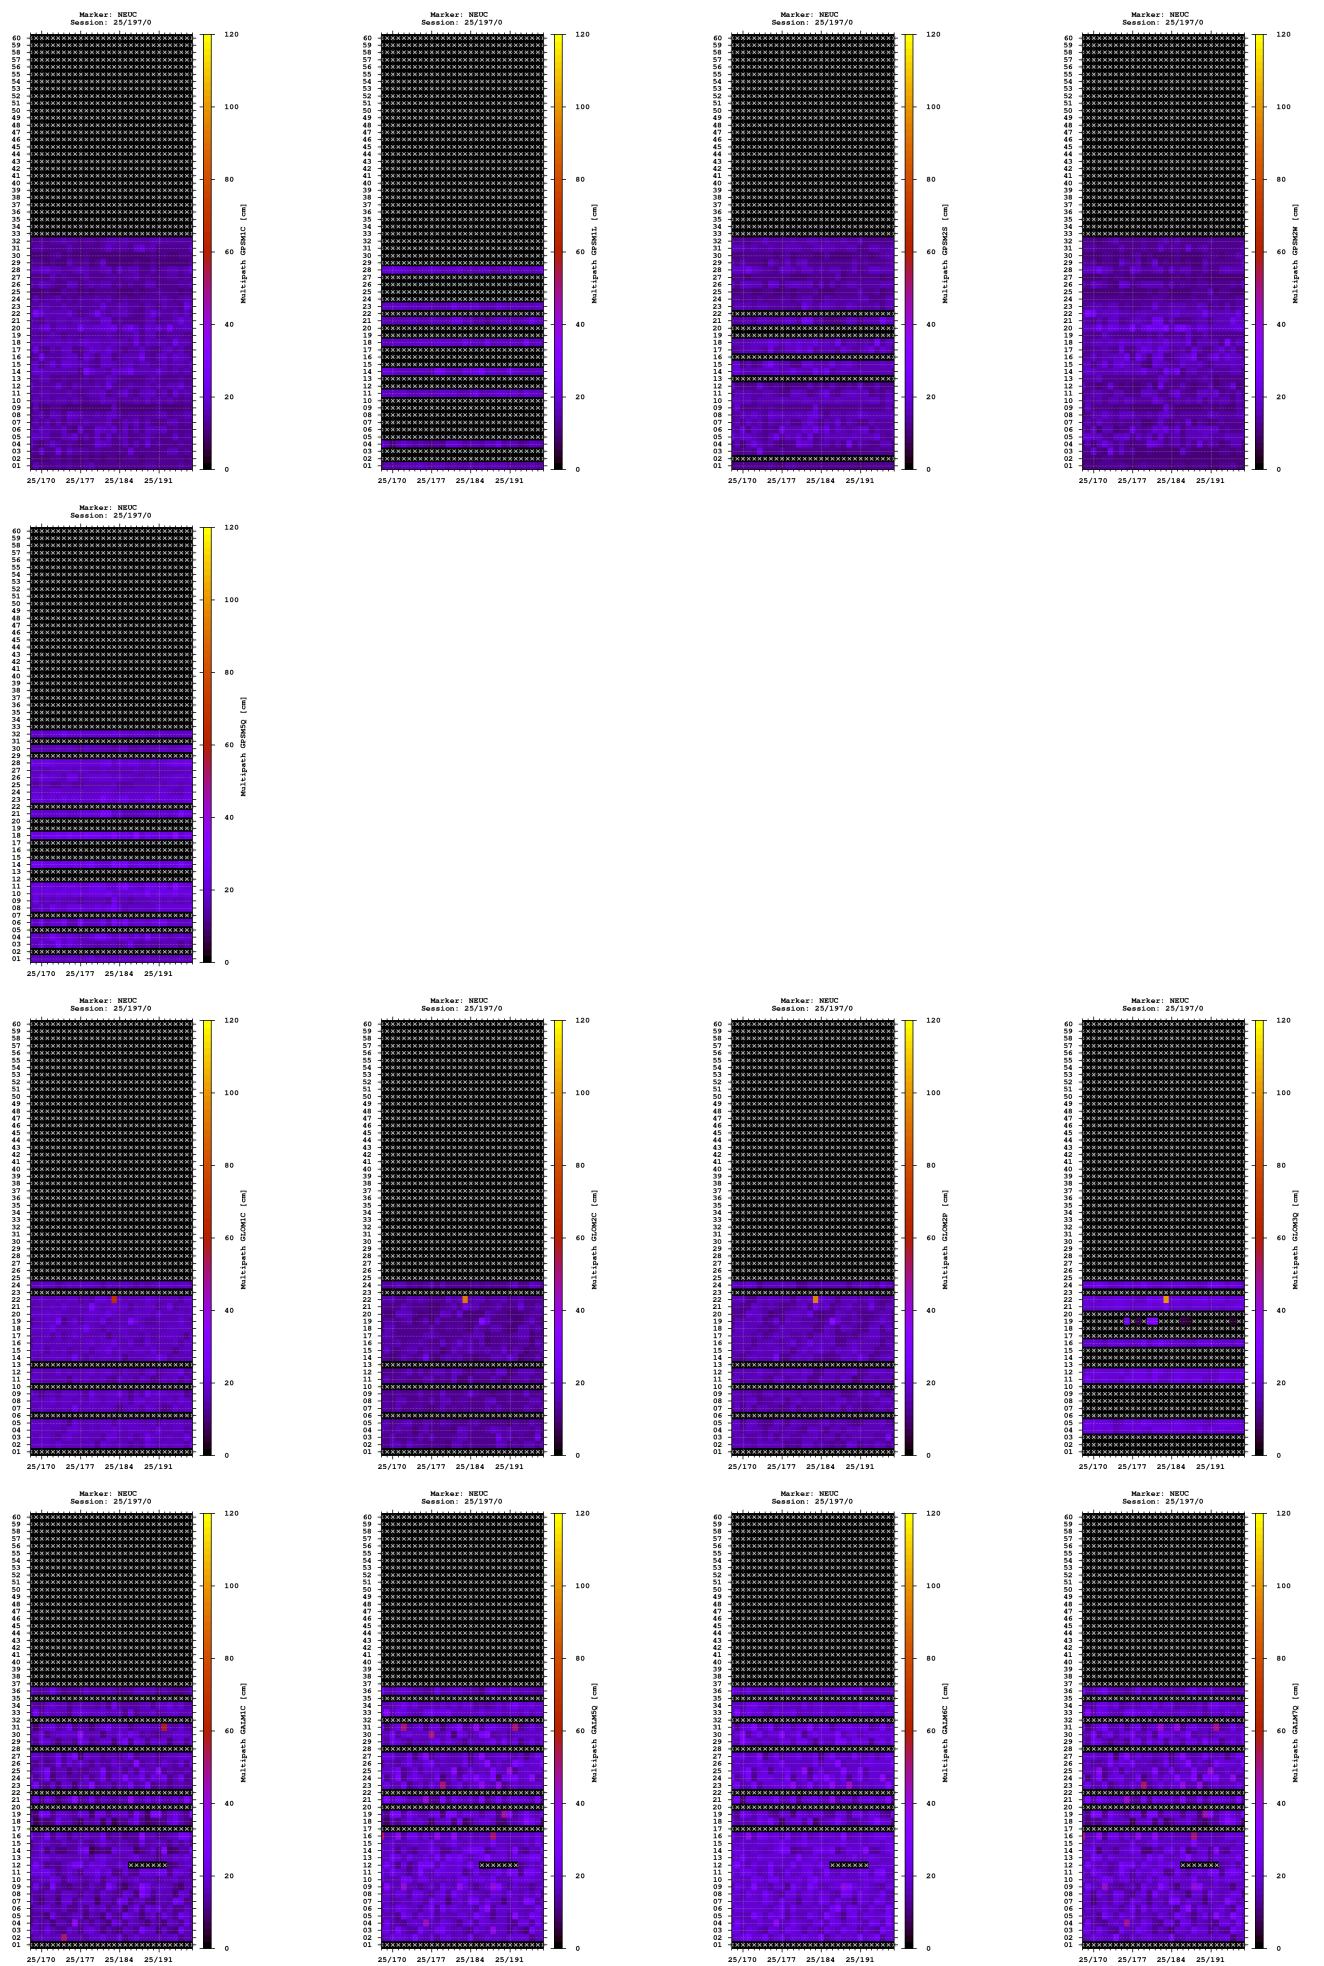


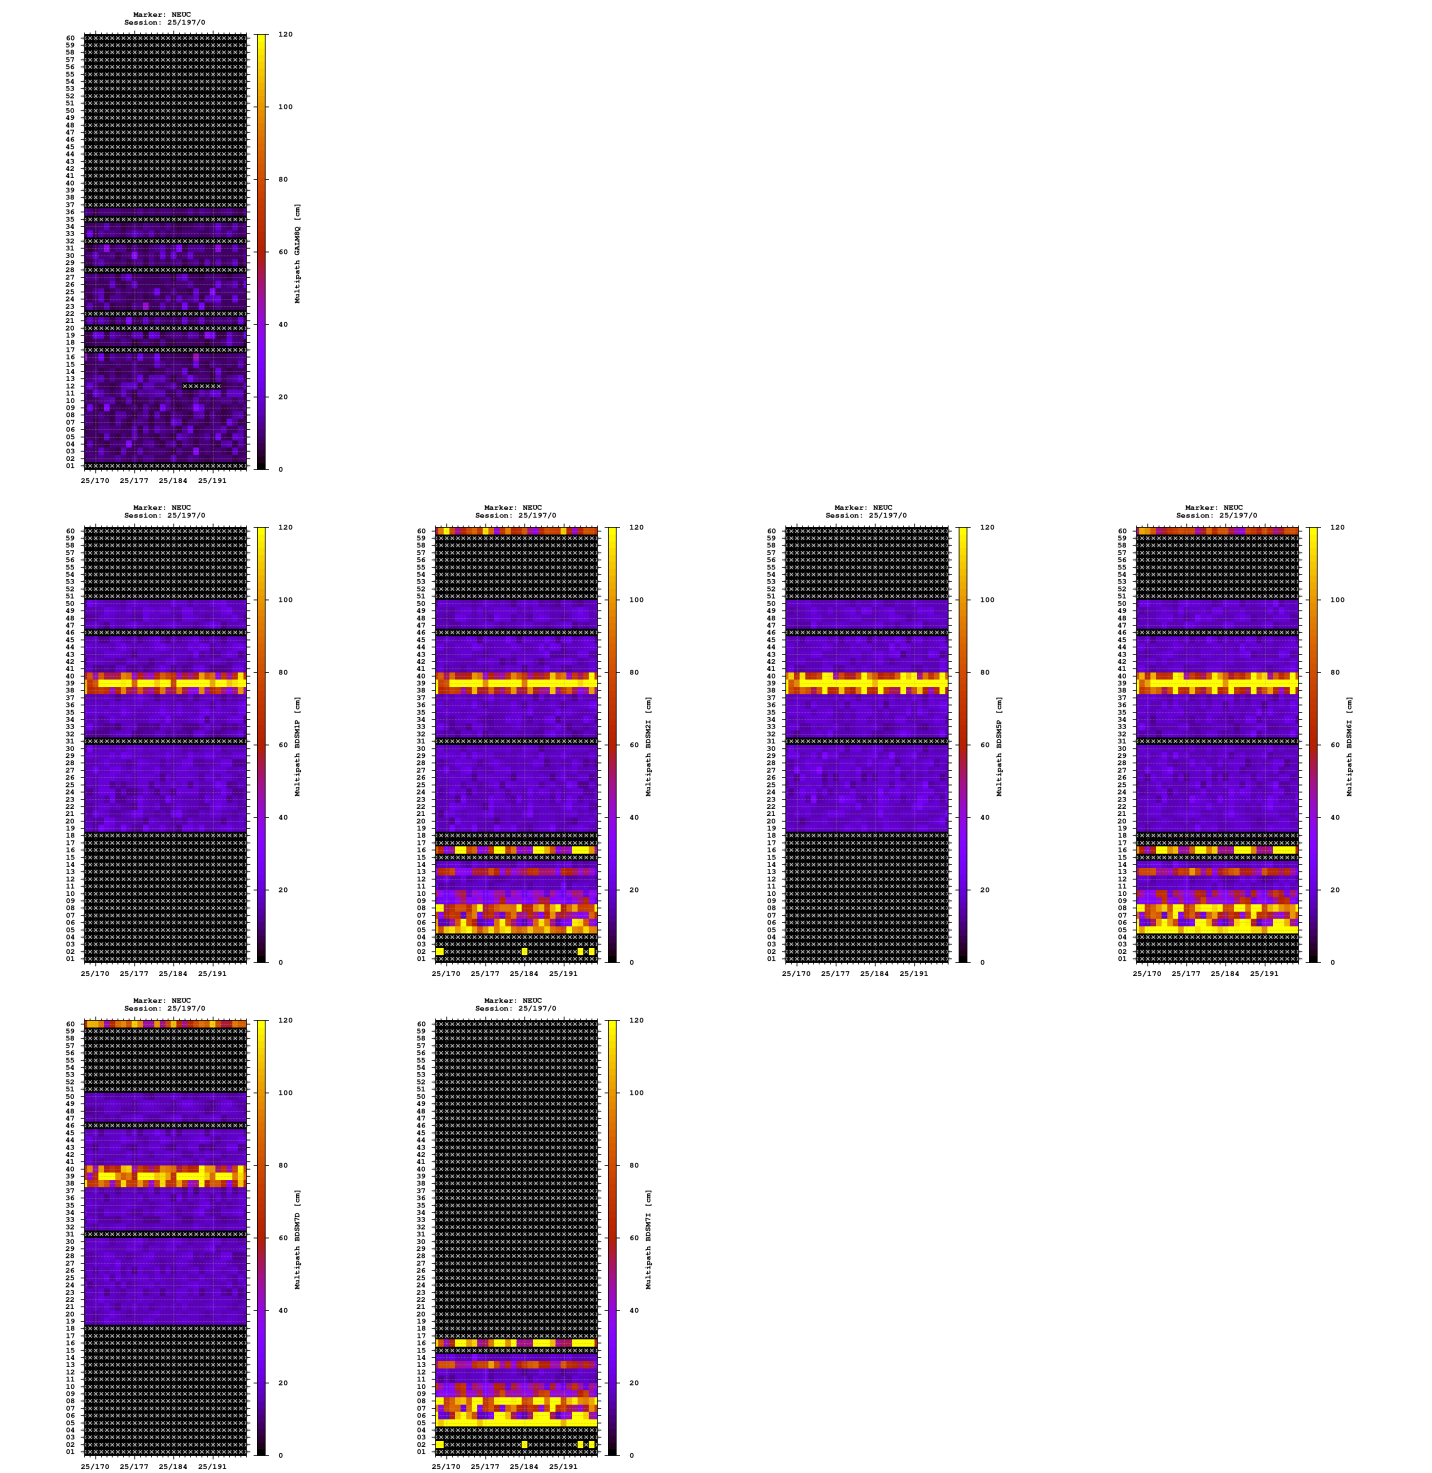



- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

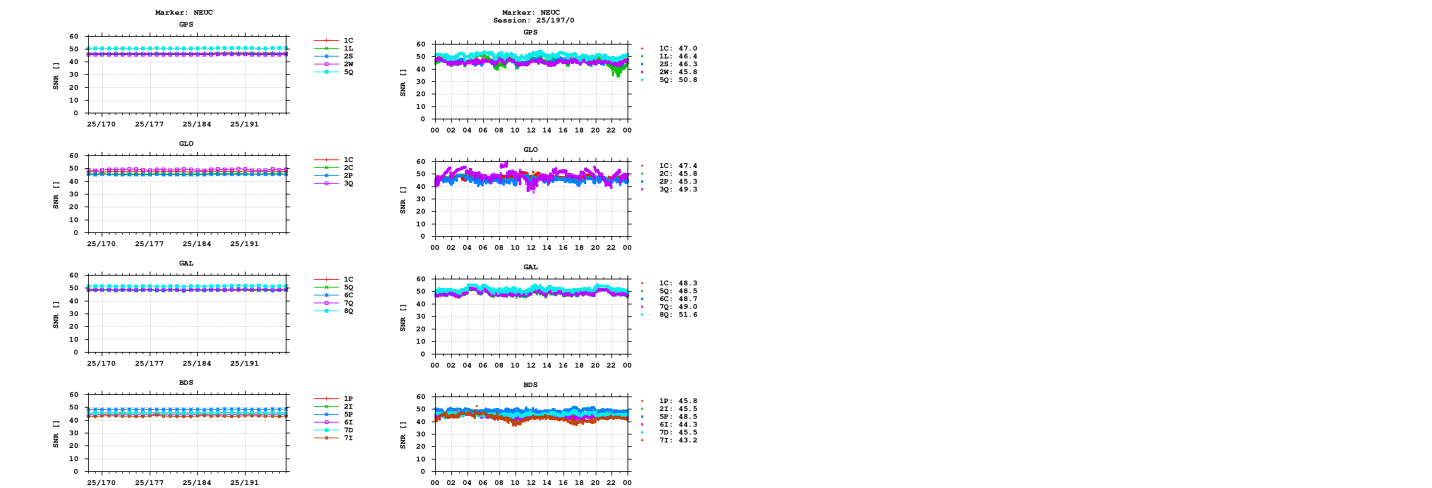

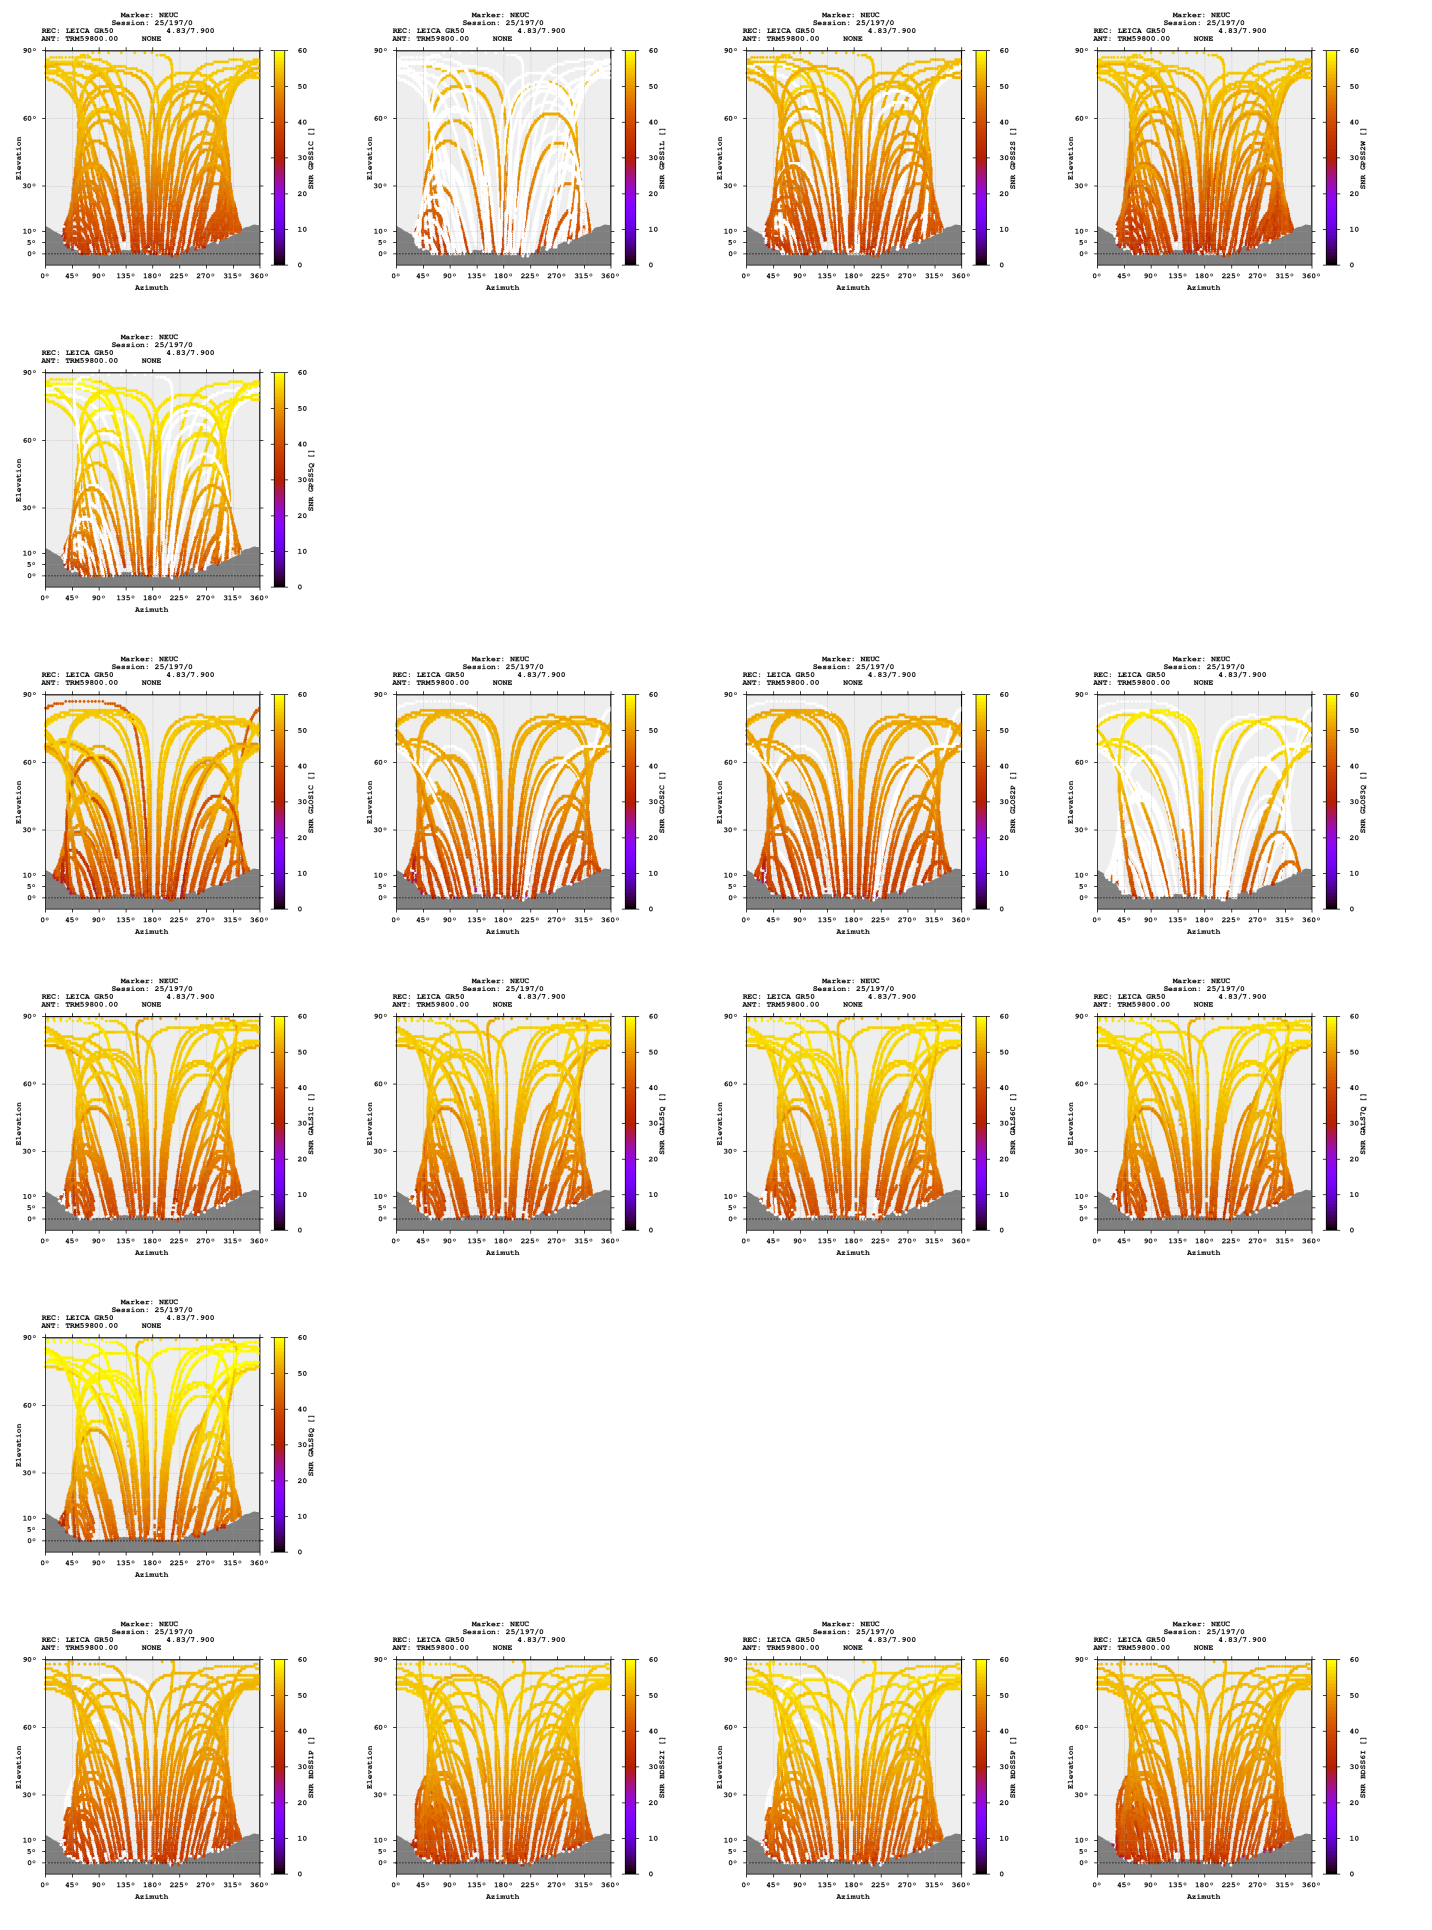

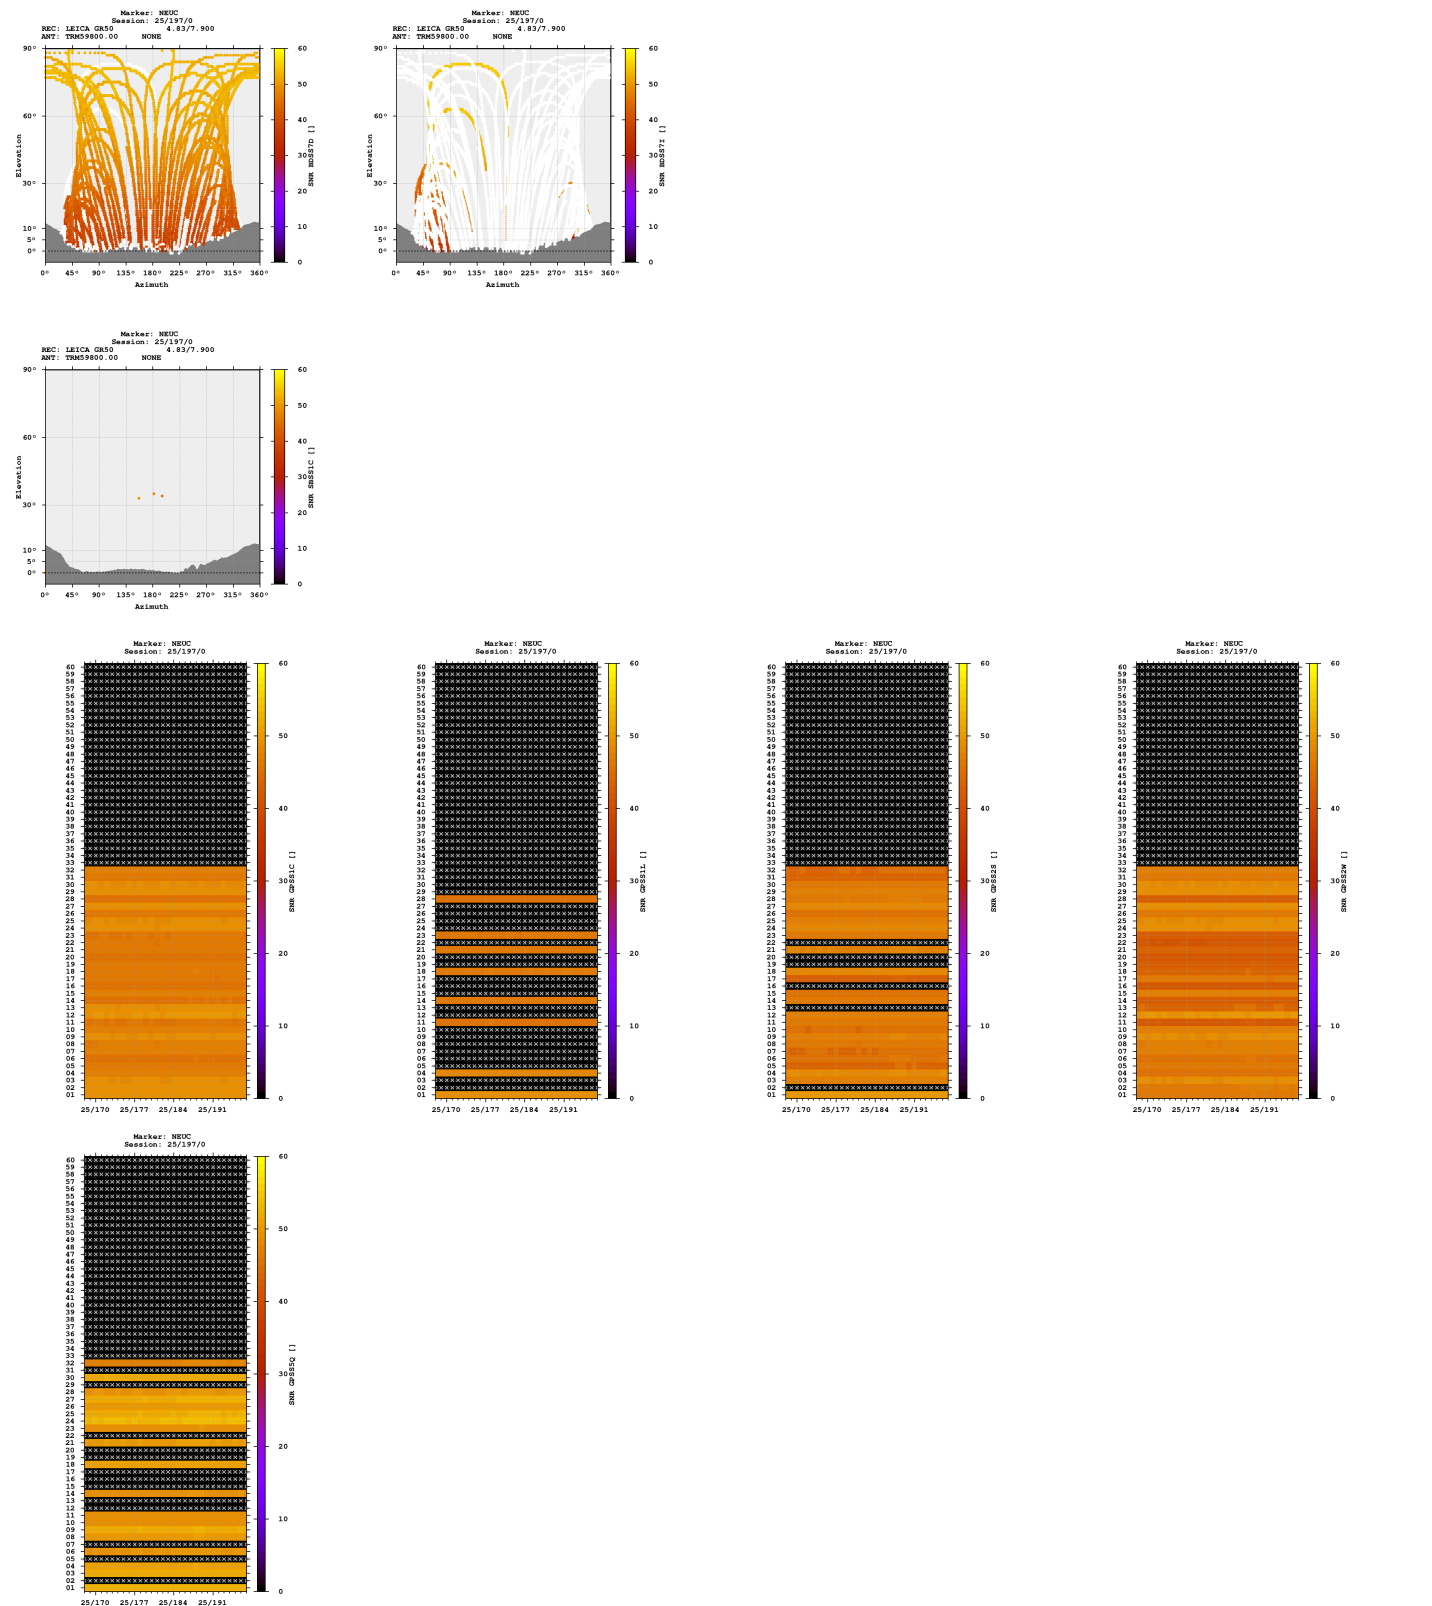


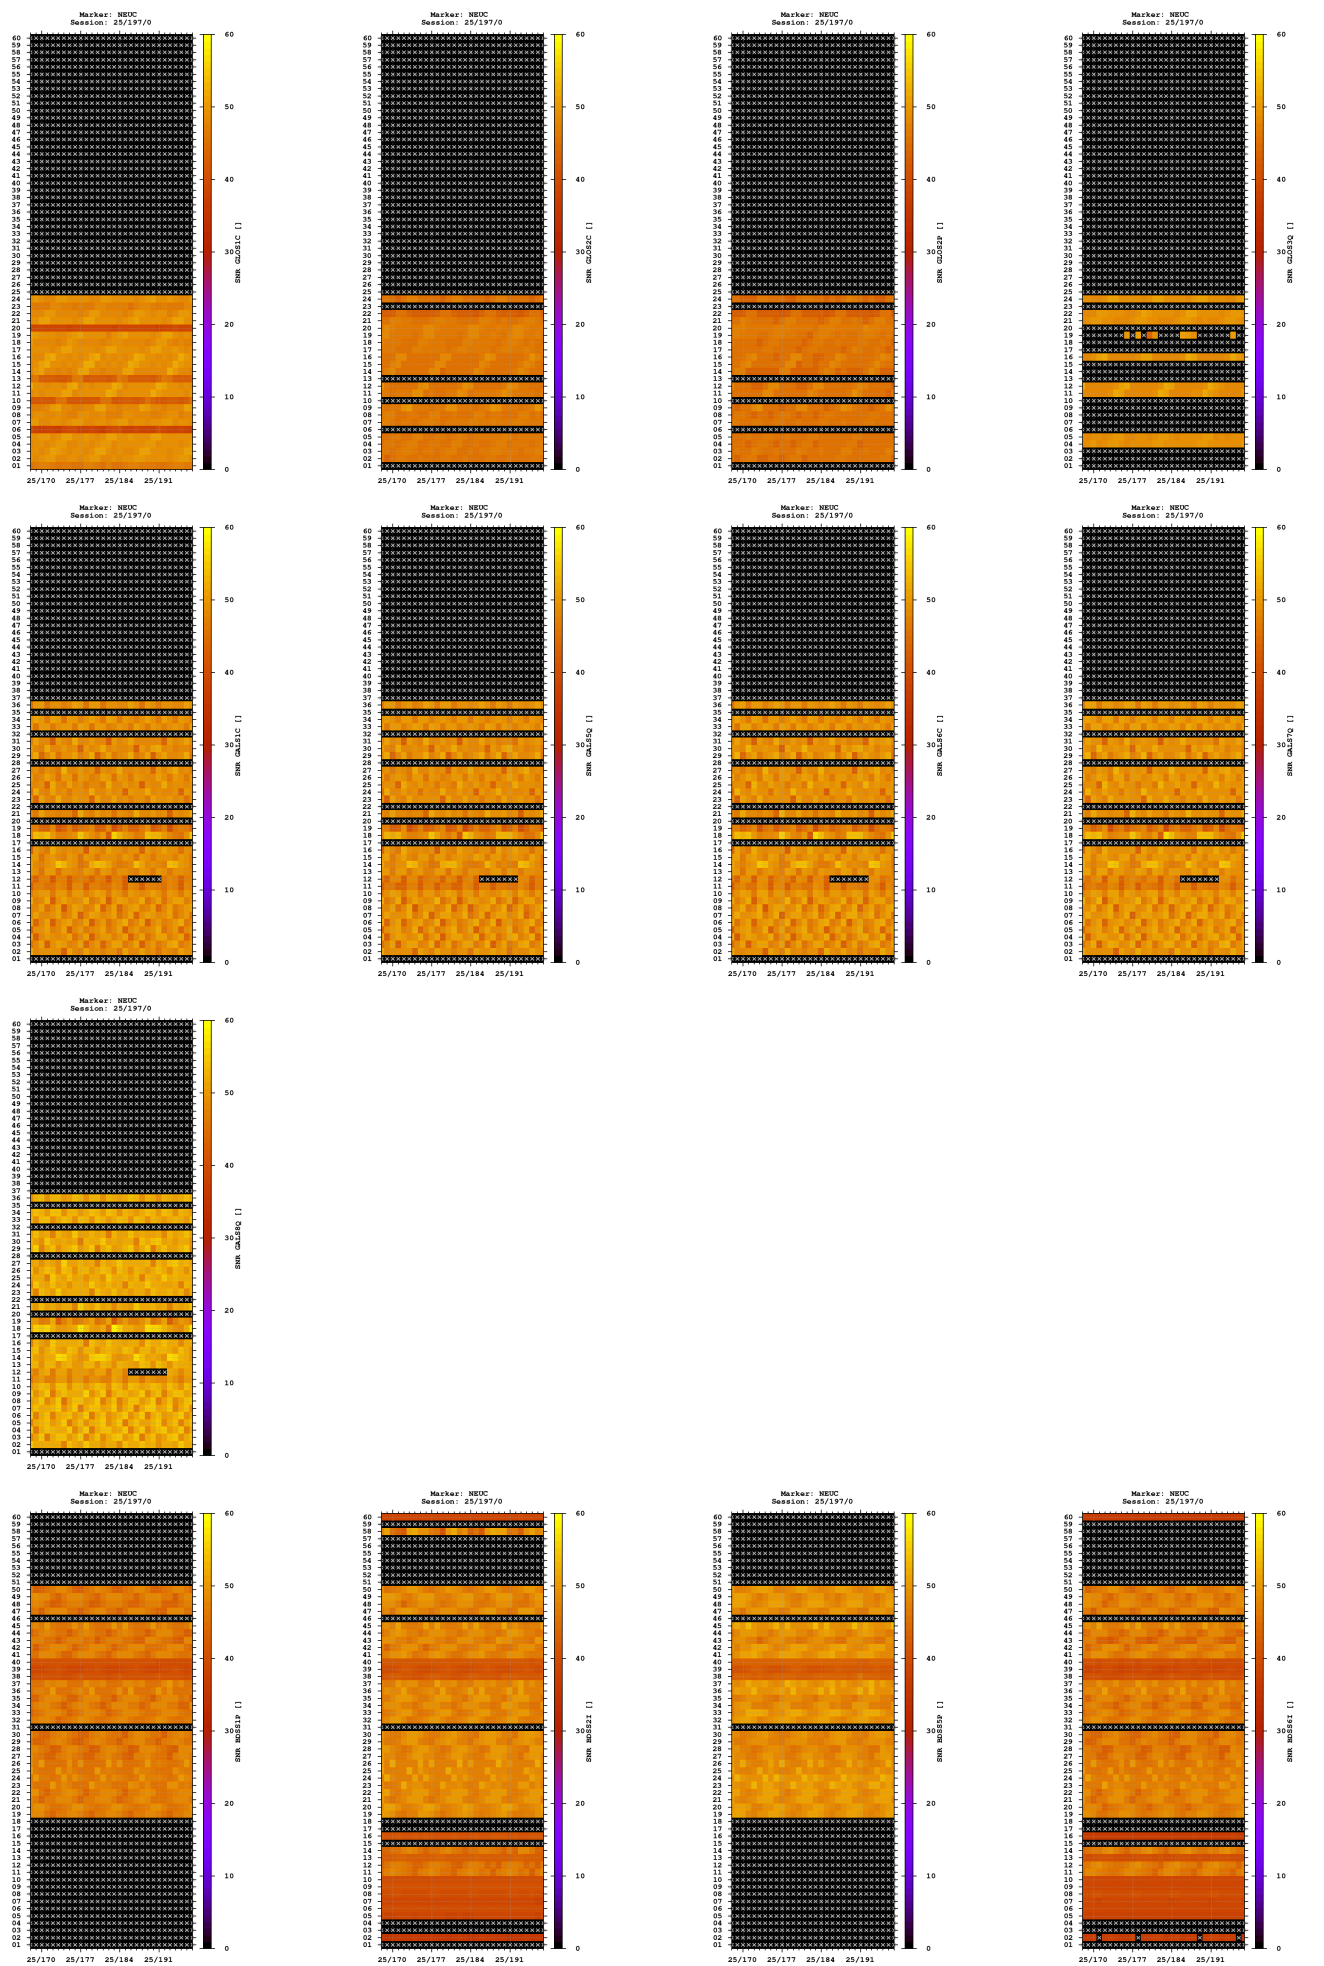


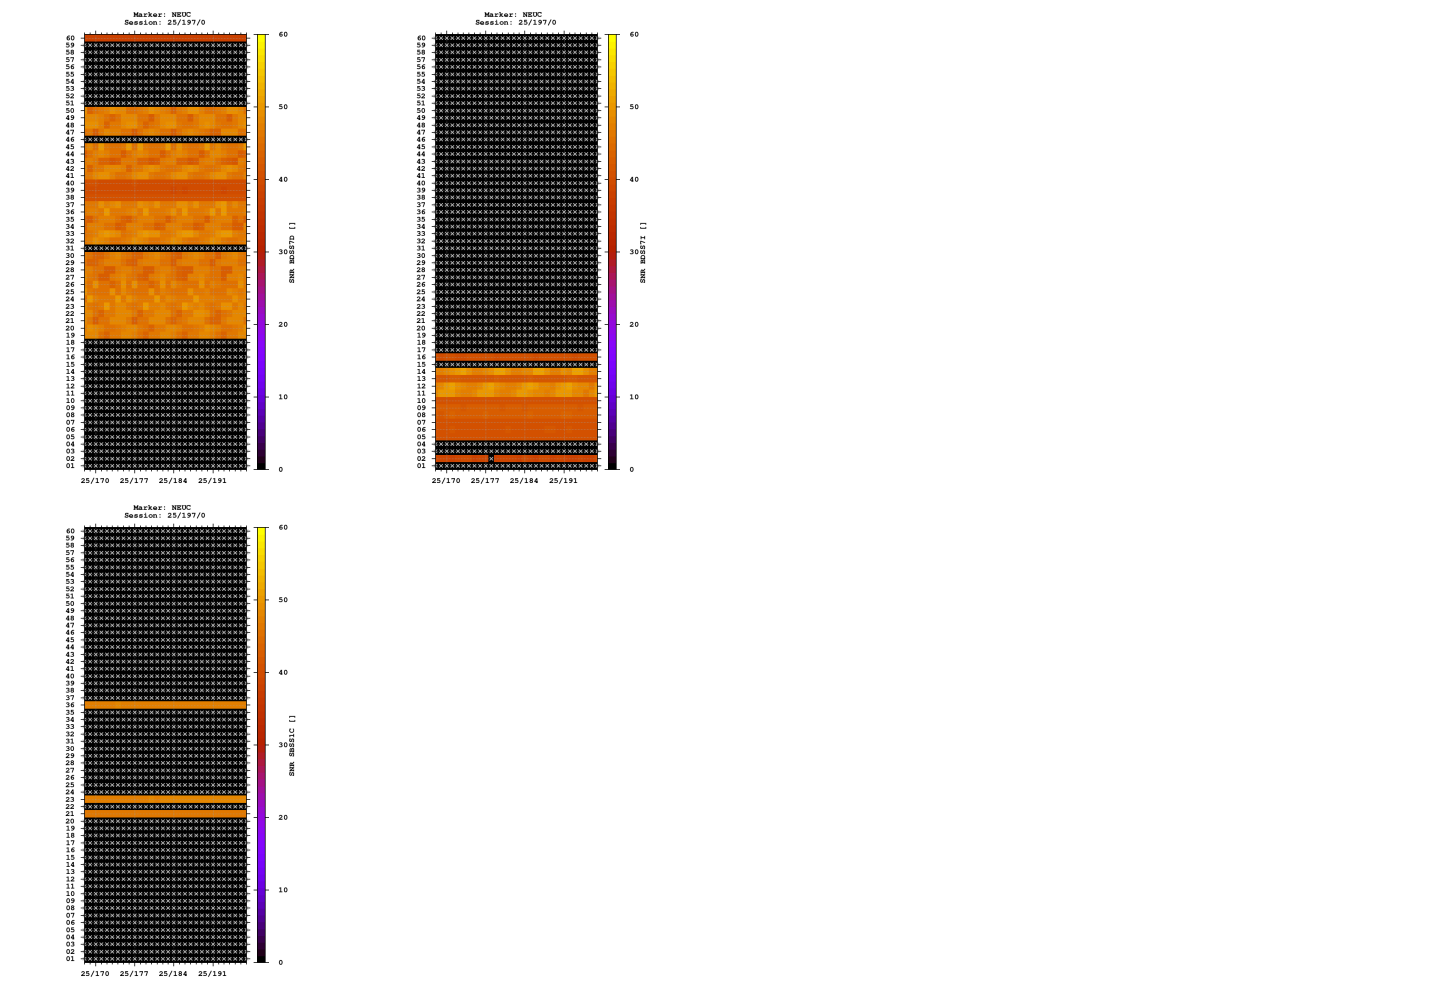

Estimates

2025-07-16 00:00:00	GPS	4326595.1375	526678.0551	4641666.7432	46.993834103	6.940489190	505.2359
2025-07-16 00:00:00	GLO	4326595.7281	526677.4152	4641665.7451	46.993824632	6.940479902	504.8532
2025-07-16 00:00:00	GAL	4326595.2543	526678.2133	4641666.6179	46.993832617	6.940490973	505.2652
2025-07-16 00:00:00	BDS	4326595.0022	526678.3263	4641666.8651	46.993835519	6.940492945	505.2558

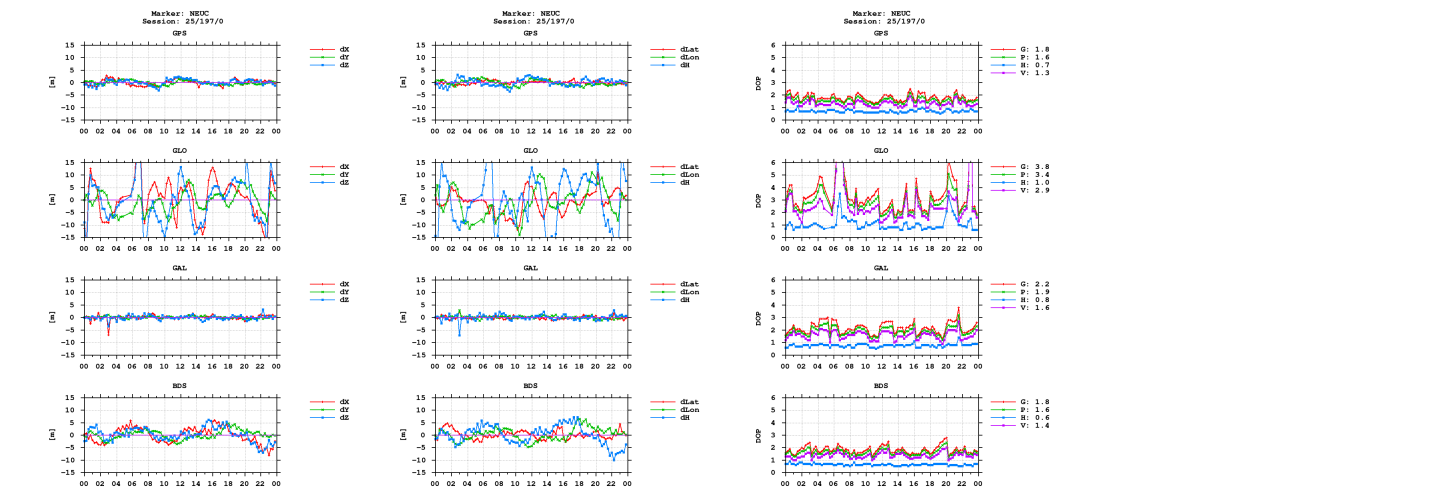

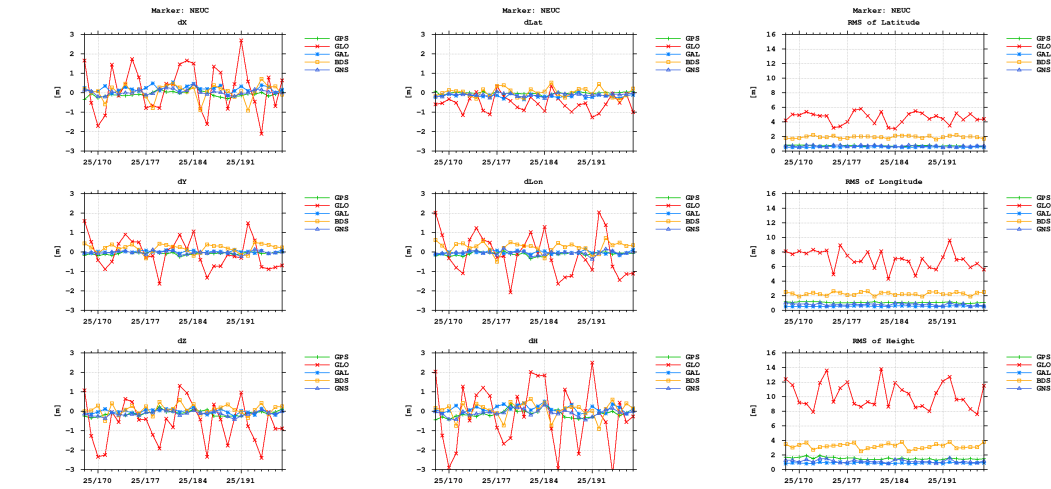

Equipment

2025-06-17 00:00:00 LEICA GR50 4.83/7.900 1873119 LEICA GR50

Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)