


GNSS observation file monitoring for STAB


Last RINEX file: STAB1100.24D.Z
 RINEX version: 3.04
 Marker: STAB
 Receiver: 5433R492 TRIMBLE NETR9 5.56
 Antenna: 5443355052 TRM59800.00 NONE

Epochs

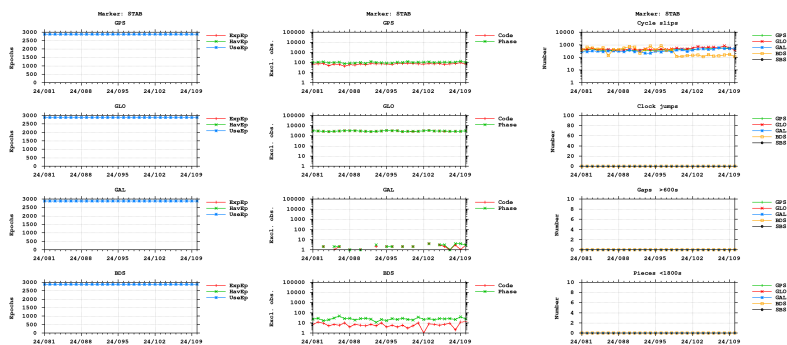








- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

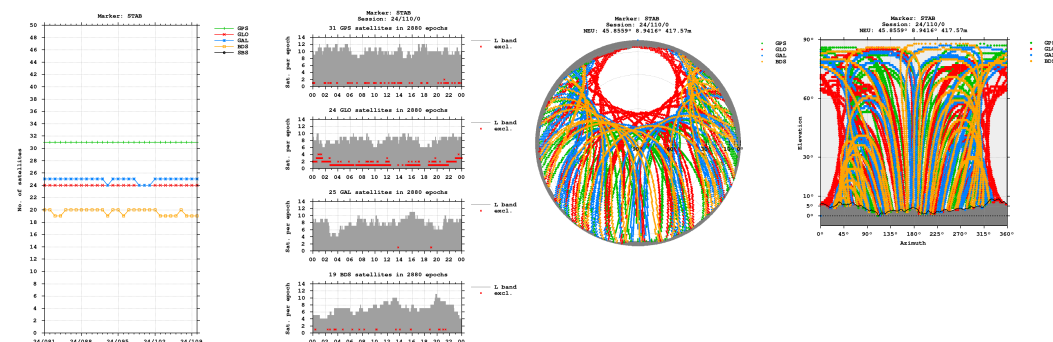


Bands

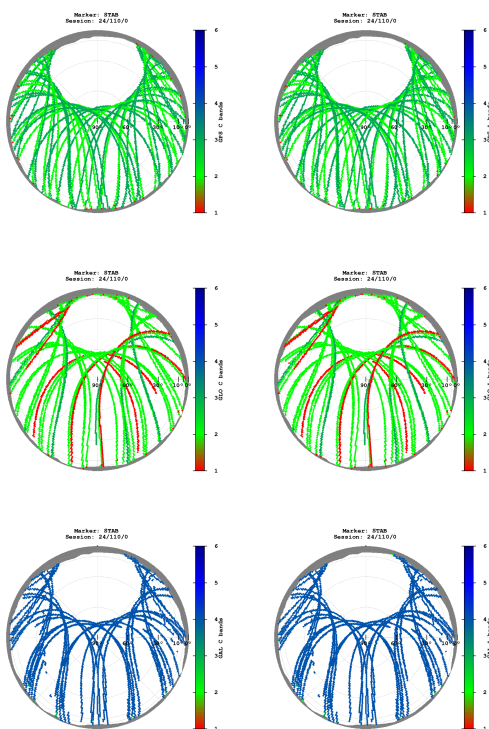


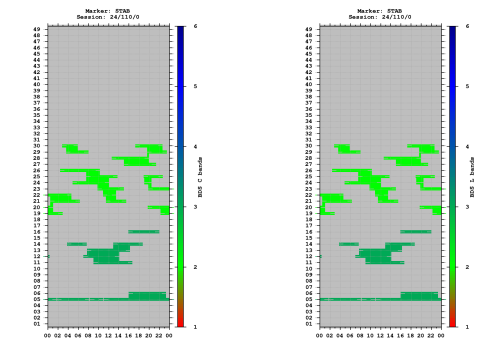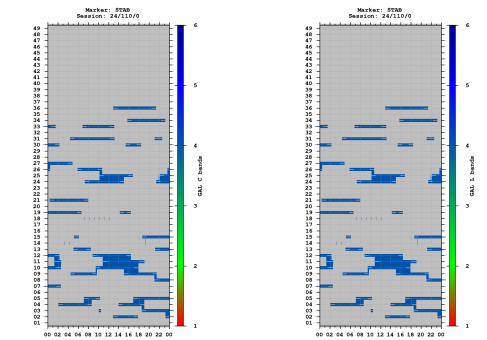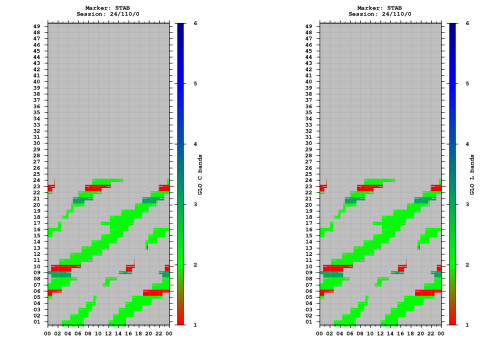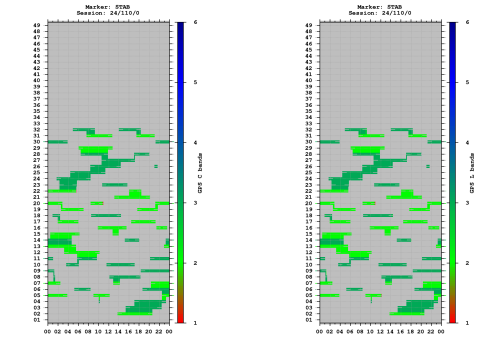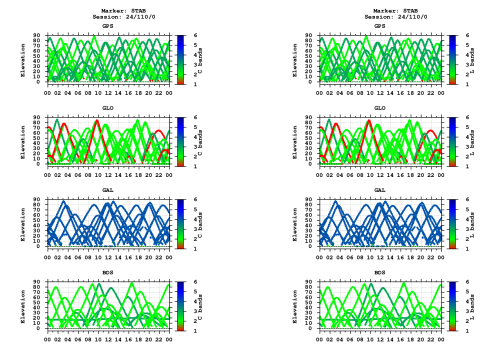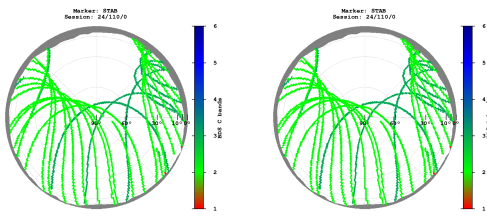


Observations


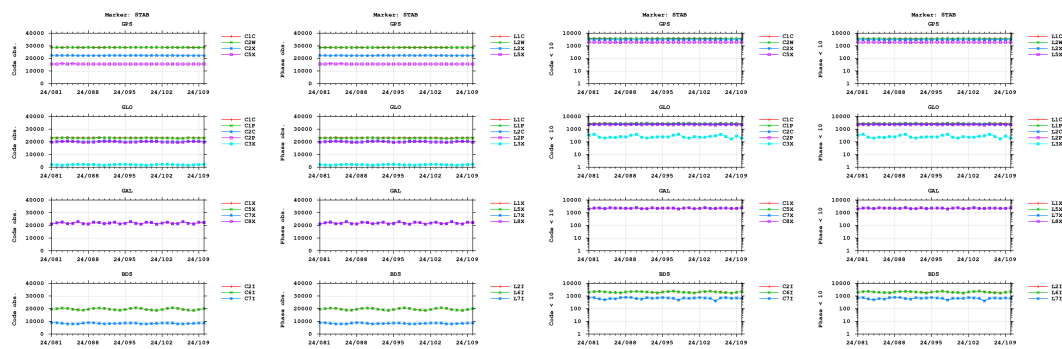



Cycle slips

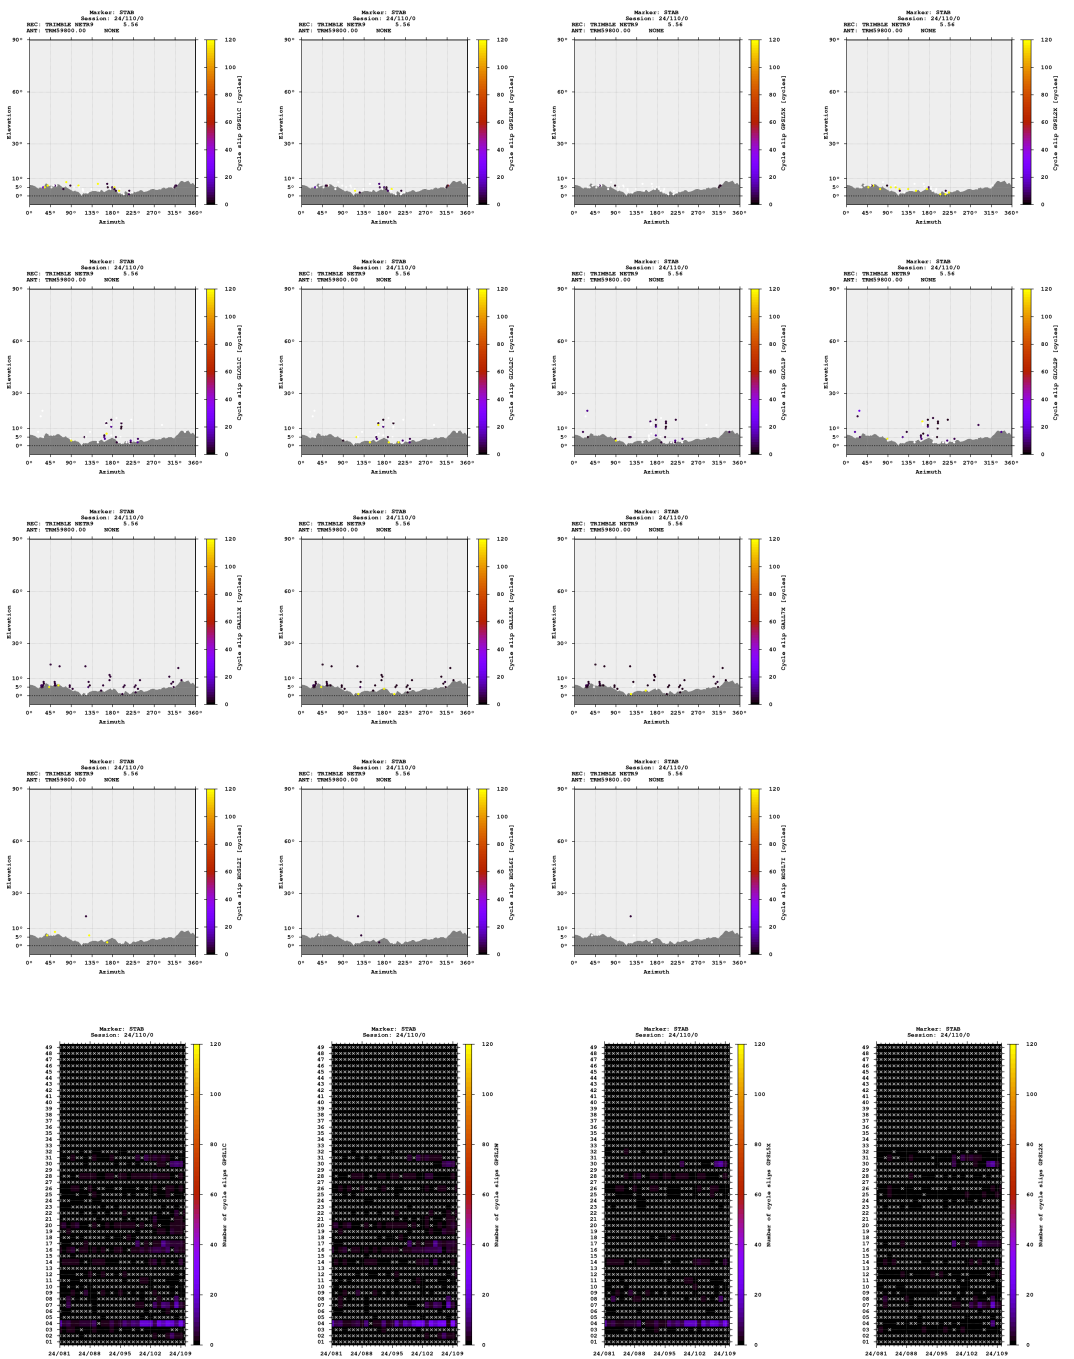

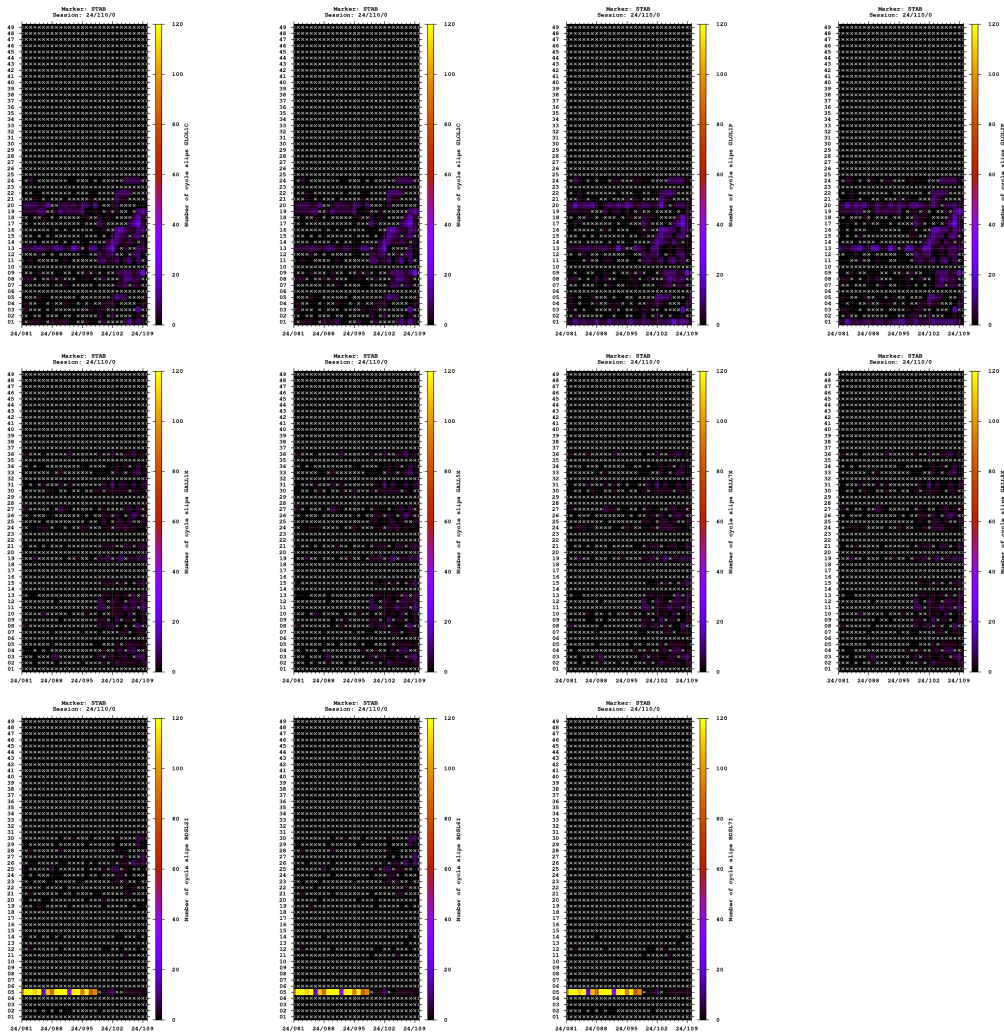


Multipath

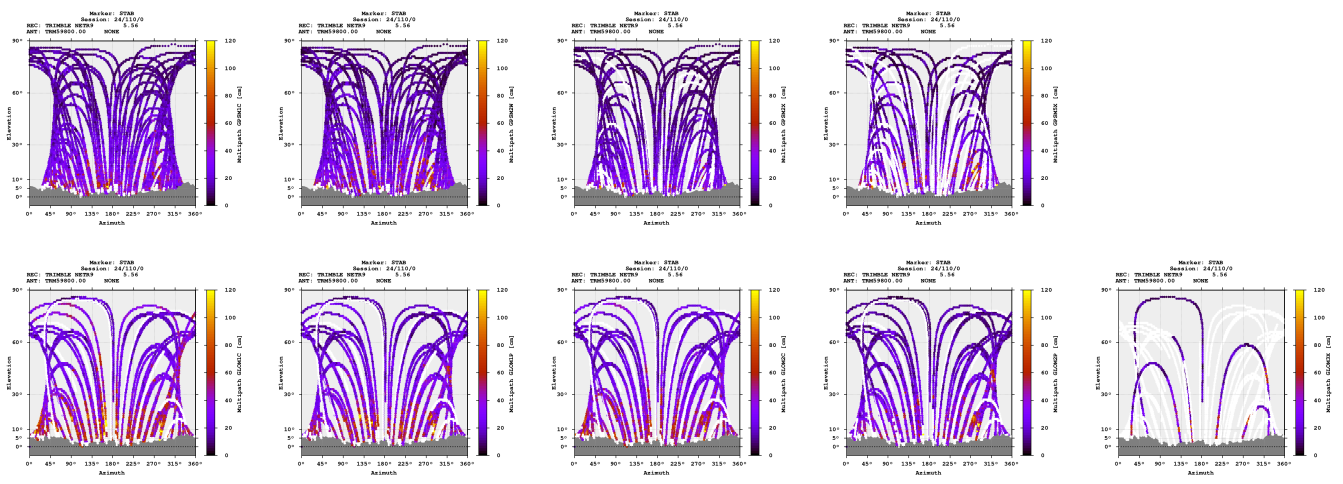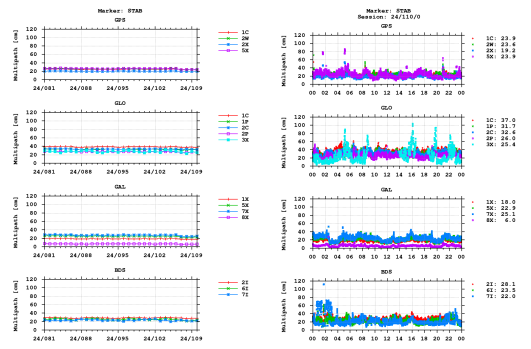


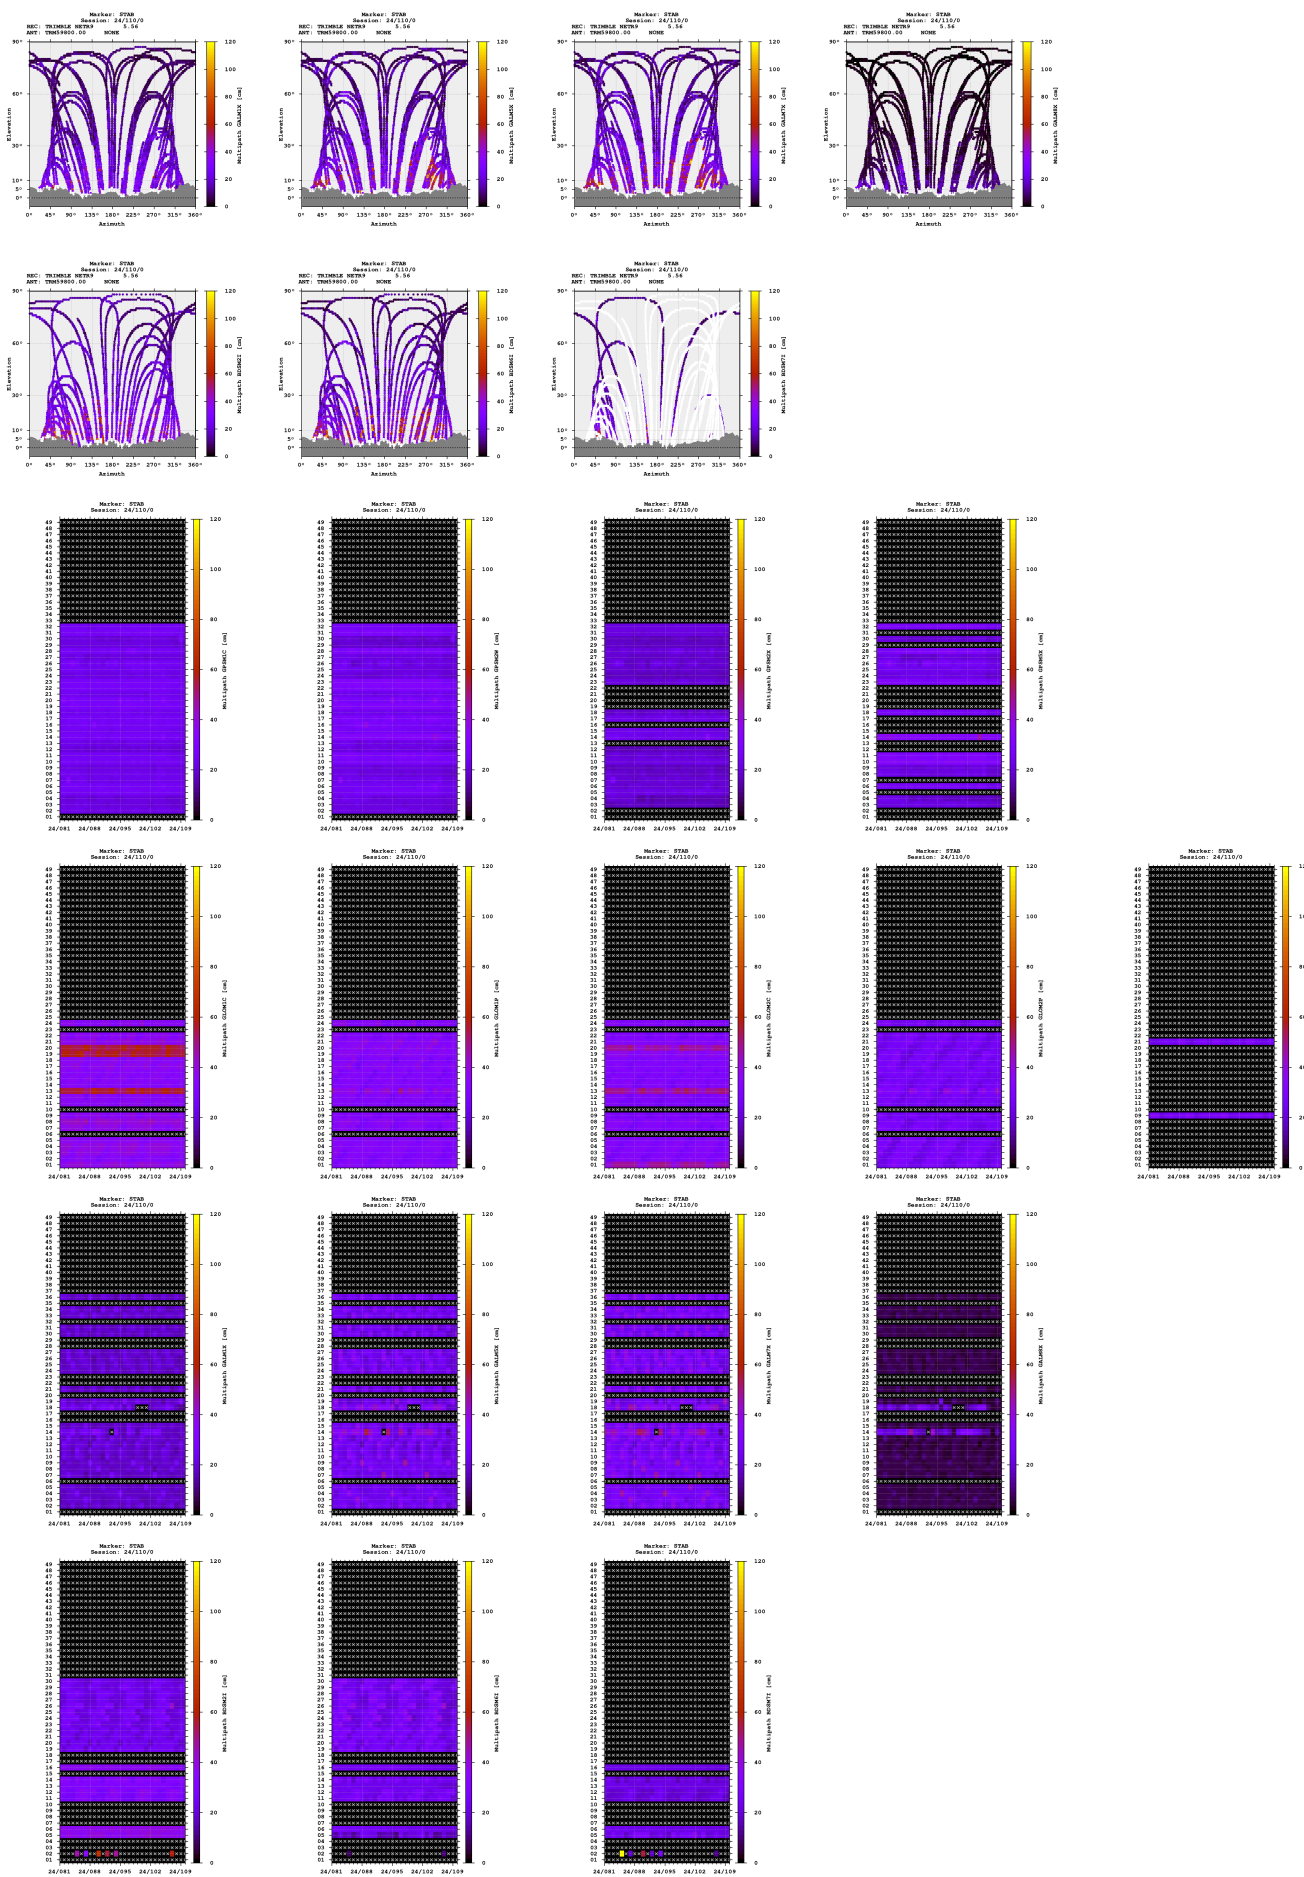

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

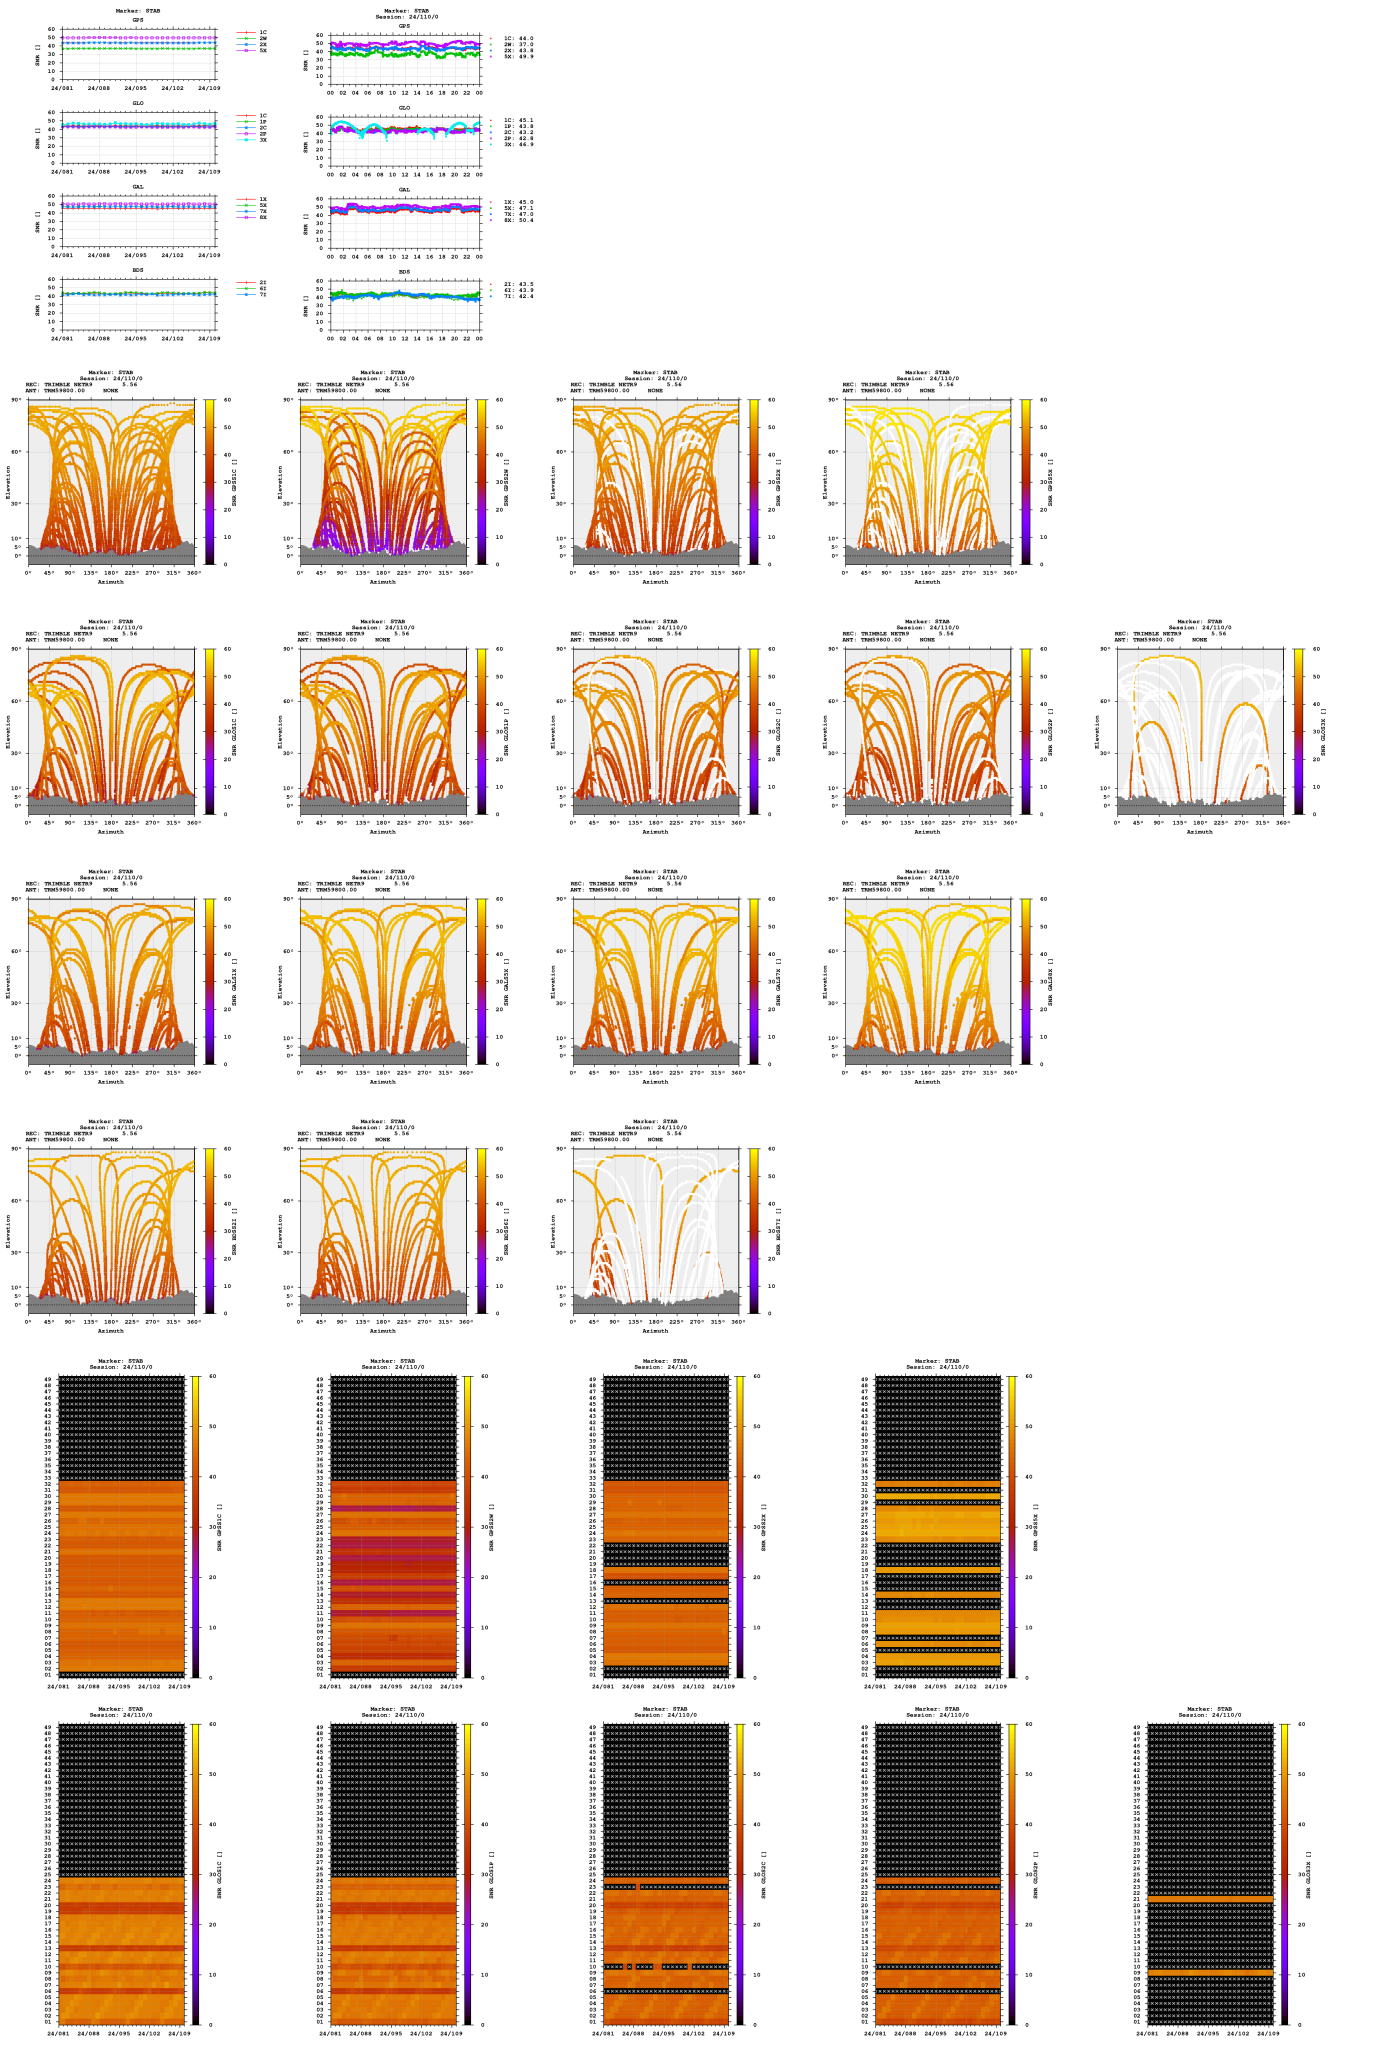

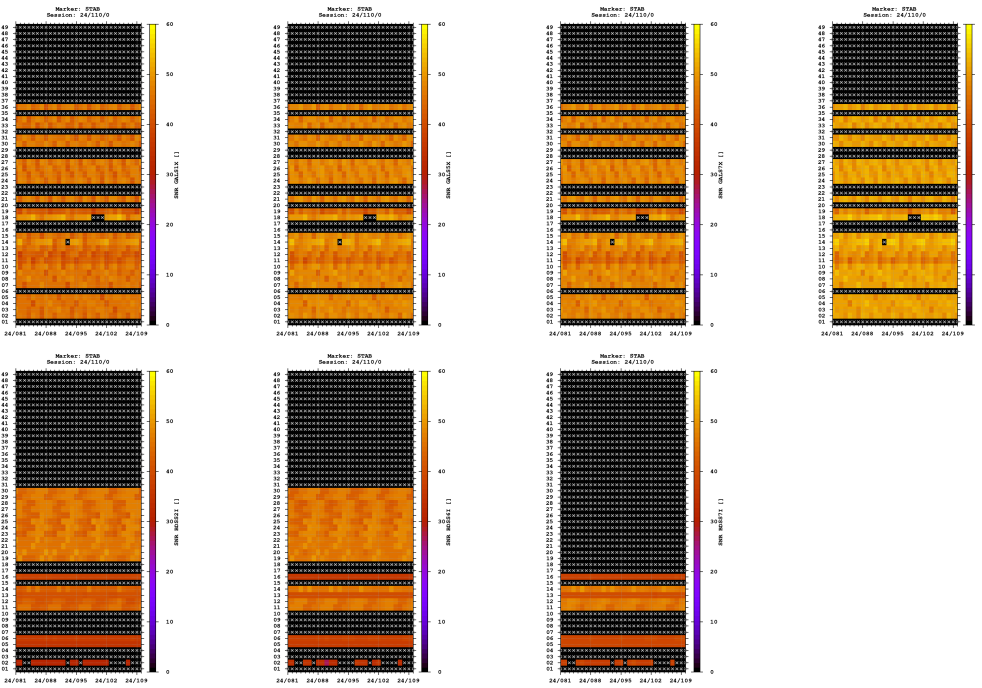

Estimates

2024-04-19 00:00:00	GPS	4396039.6347	691675.3679	4554403.2772	45.855860700	8.941644705	417.2179
2024-04-19 00:00:00	GLO	4396041.3493	691674.9566	4554404.0398	45.855854957	8.941636043	418.9003
2024-04-19 00:00:00	GAL	4396039.8191	691675.2144	4554403.0325	45.855858189	8.941642492	417.1104
2024-04-19 00:00:00	BDS	4396039.4520	691674.0550	4554403.2675	45.855863686	8.941629321	417.6630

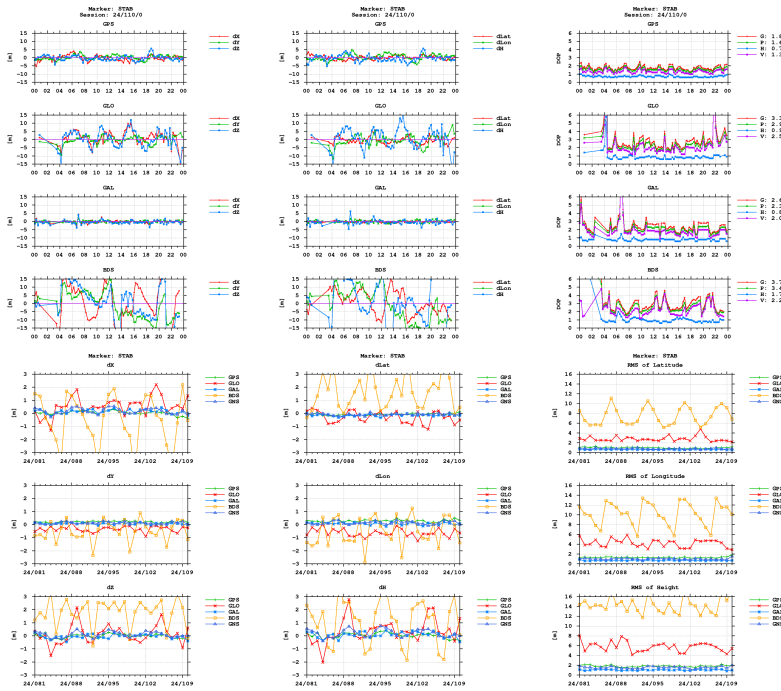

Equipment

2024-03-21 00:00:00 TRIMBLE NETR9 5.56 5433R492 TRIMBLE NE

Program info

G-Nut/Anubis Free [3.8] Mar 3 2024 20:32:19 (Rev: 4233)