

GNSS observation file monitoring for TLMF

Last RINEX file: TLMF1970.25D.Z


RINEX version: 3.04

Marker: TLMF 10003M010

Receiver: 2090084 LEICA GR50 4.80

Antenna: 4711118098 TRM57971.00 NONE


Epochs

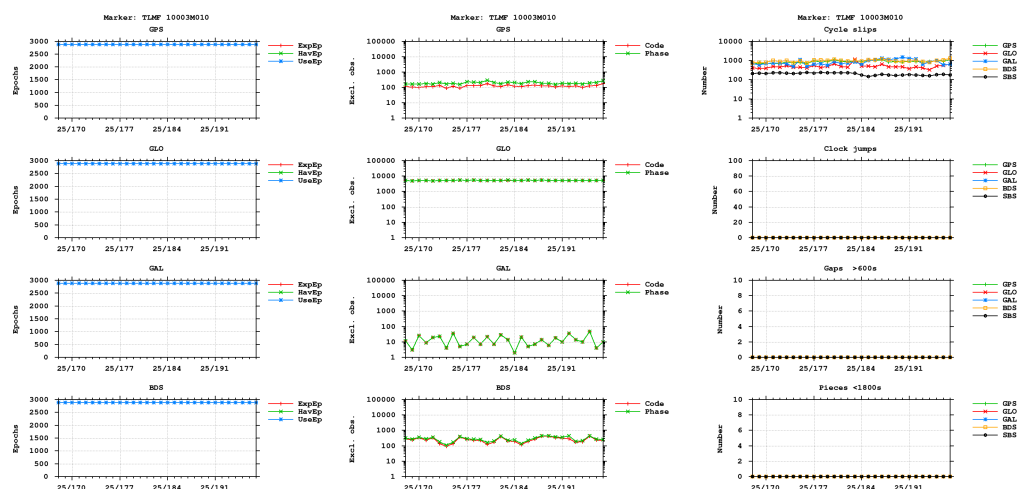


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

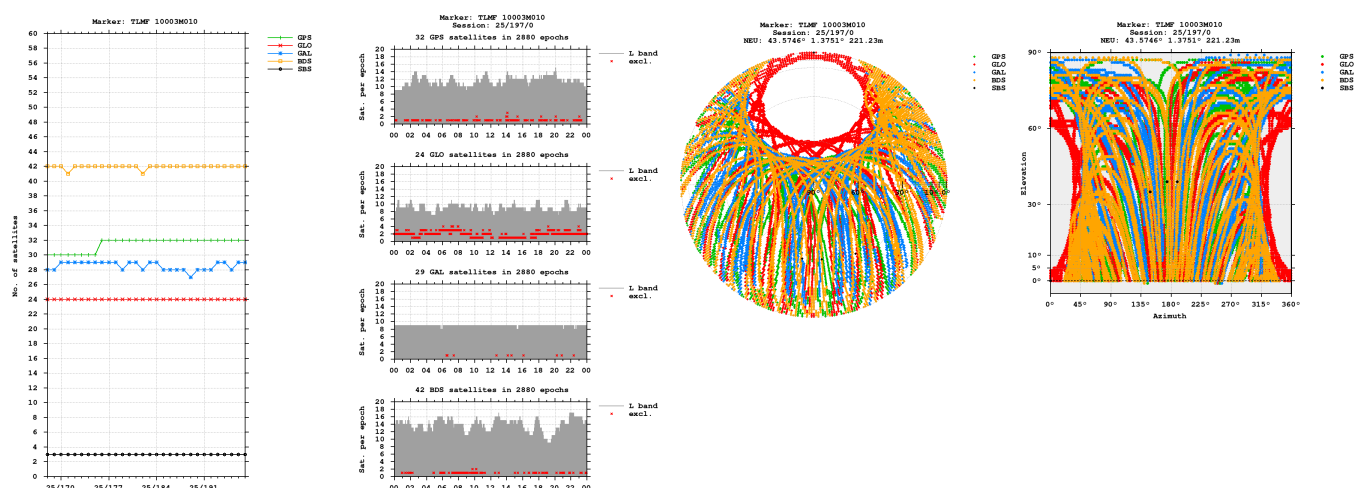


Bands

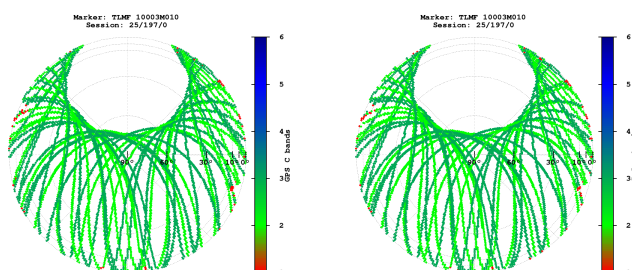


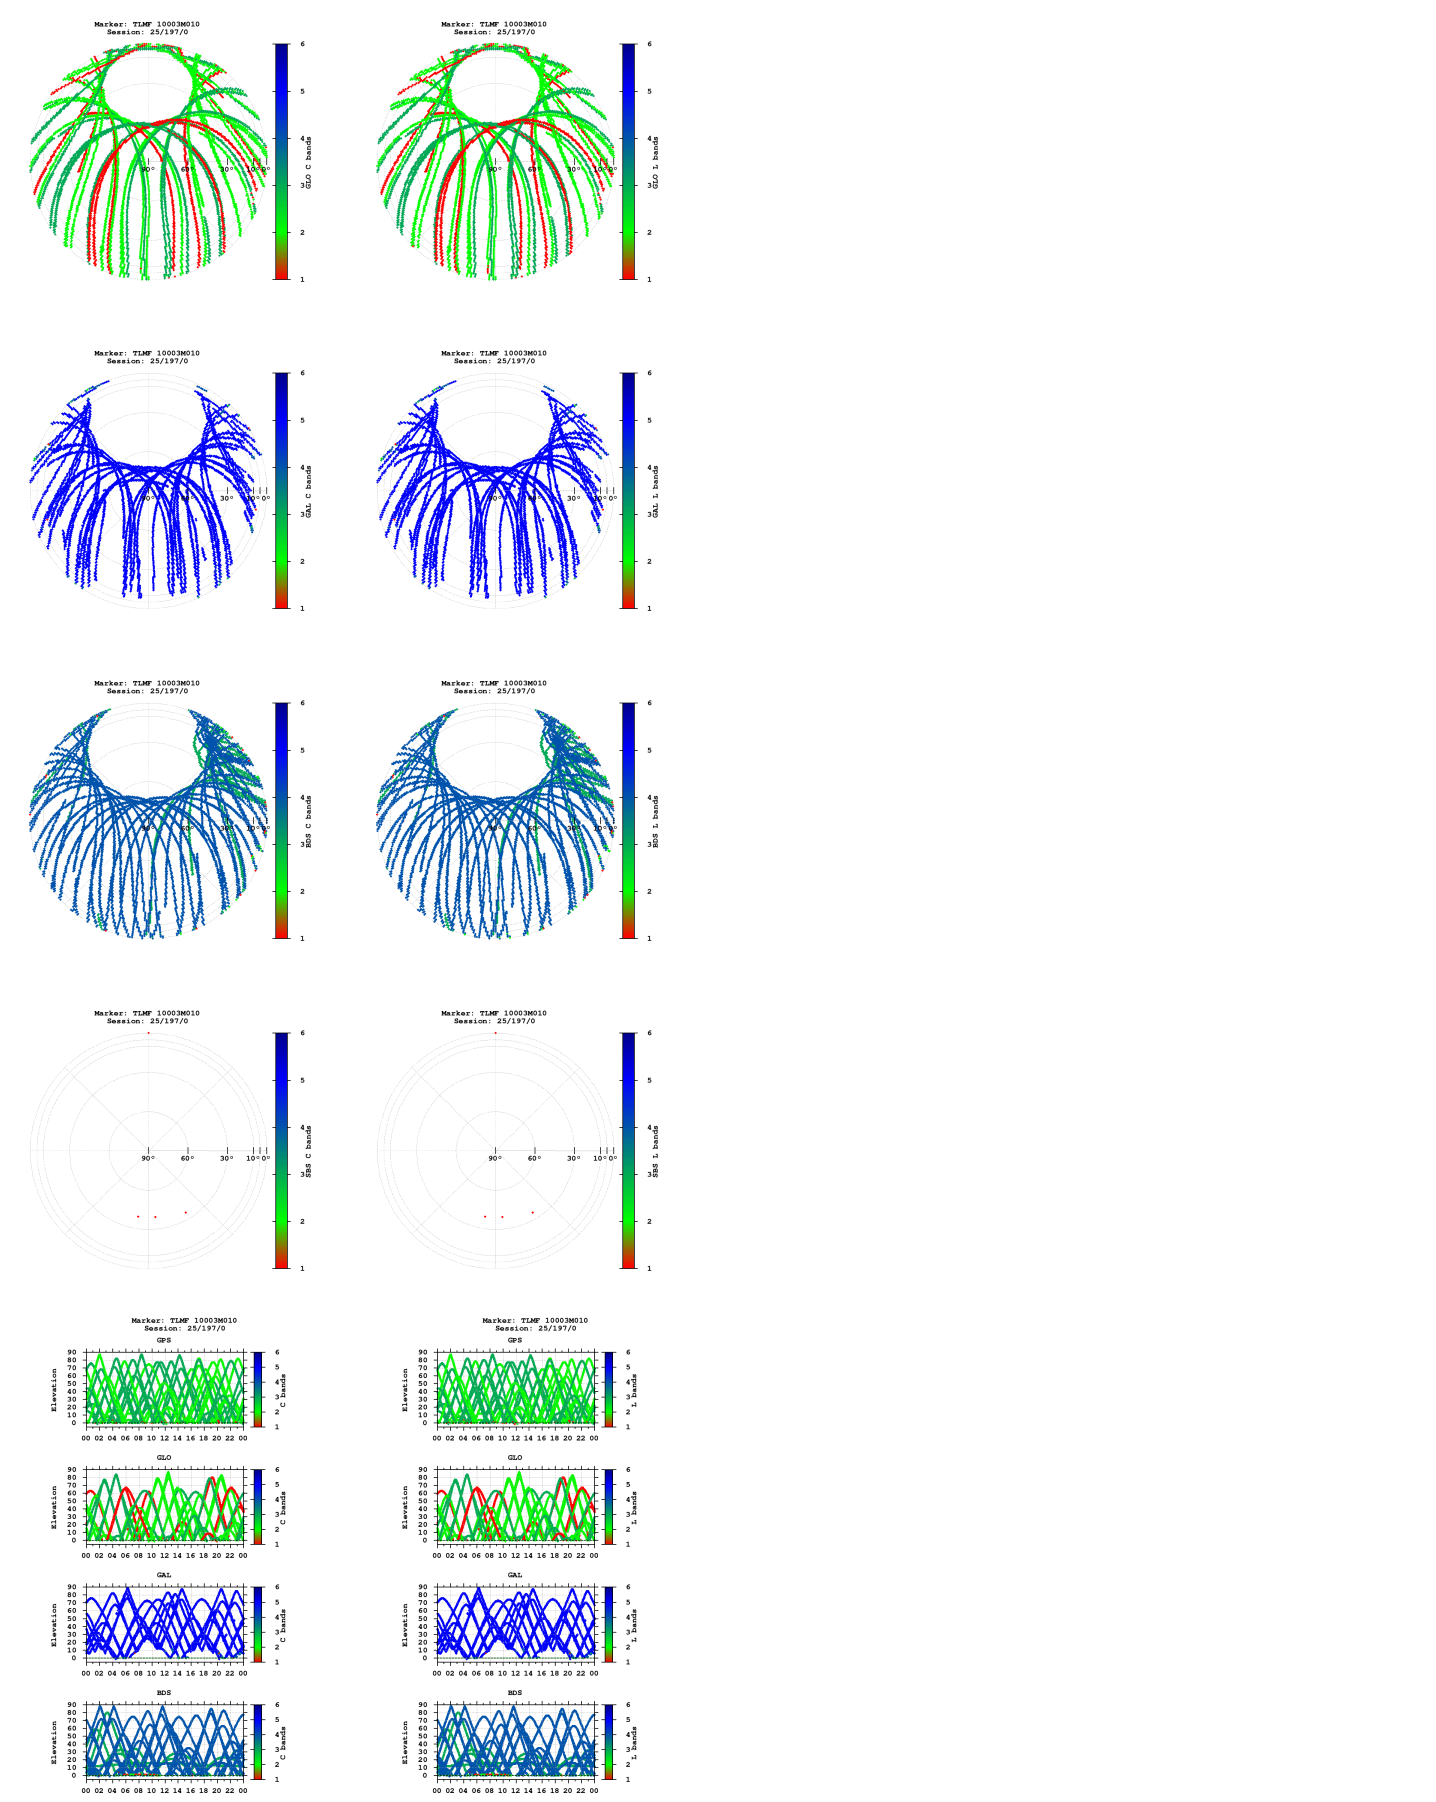

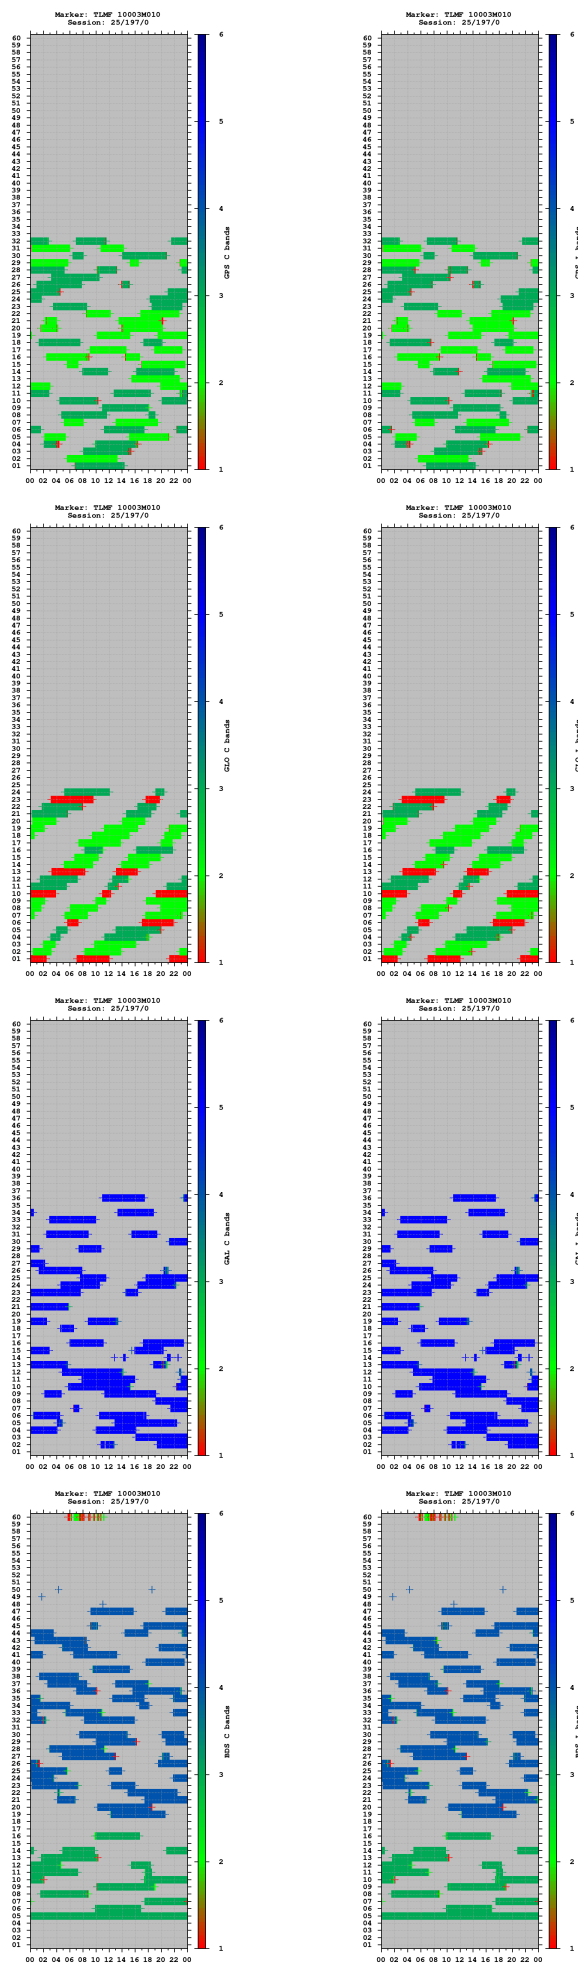


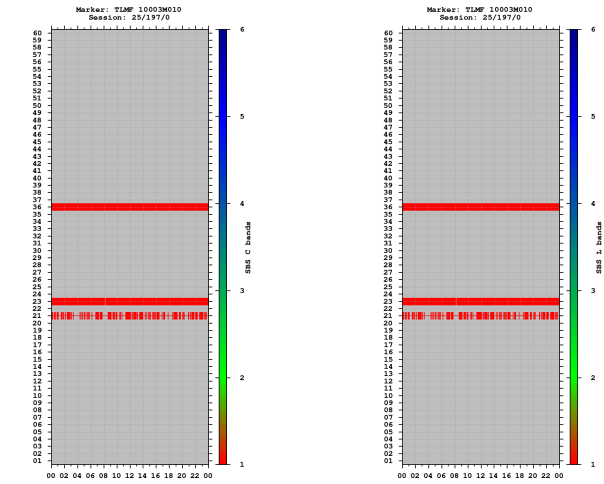


Observations

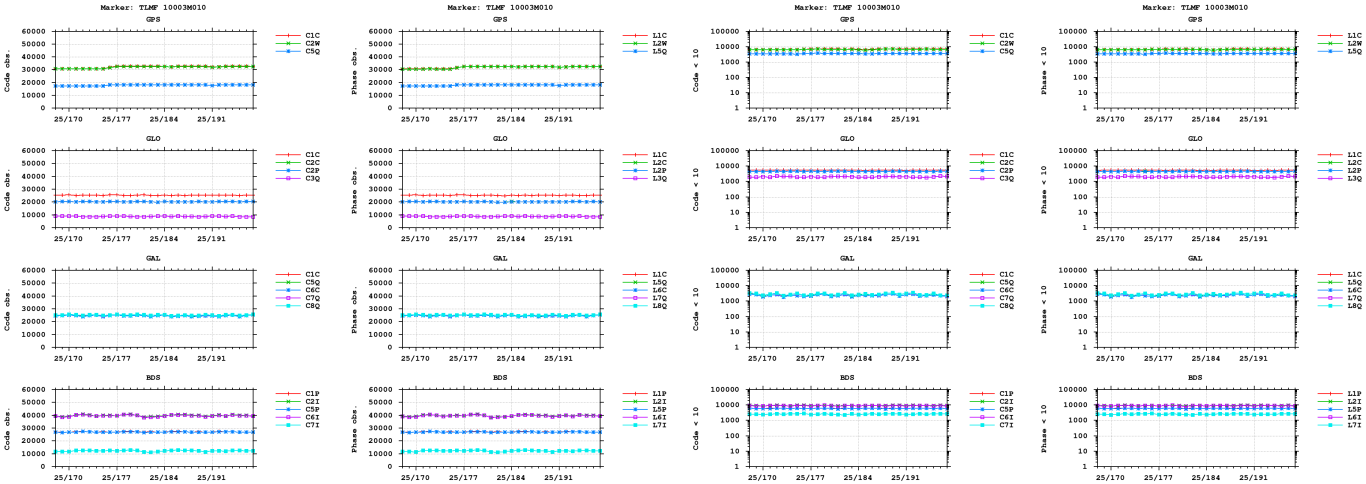



Cycle slips

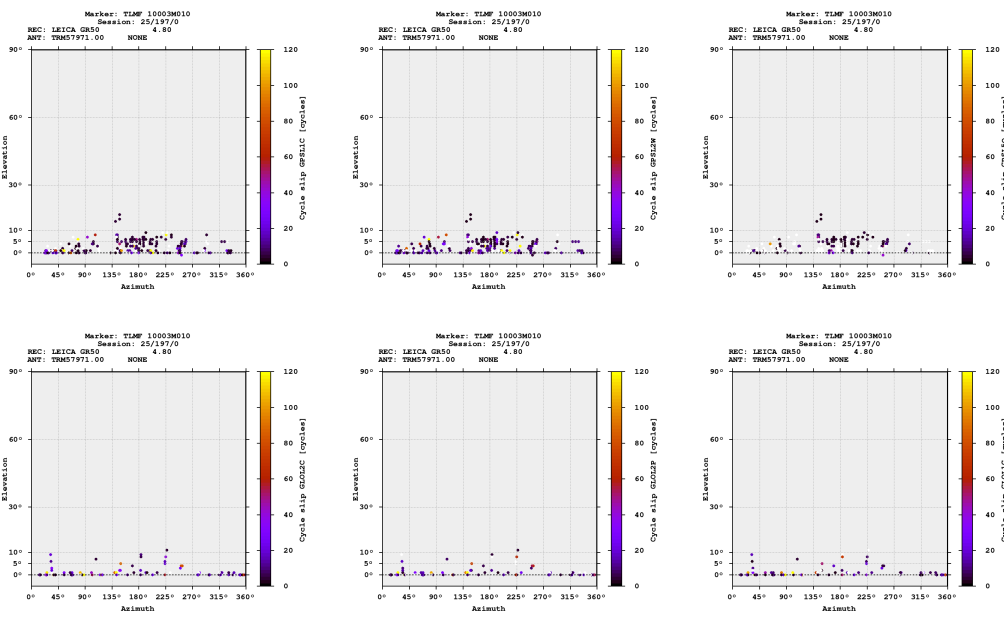


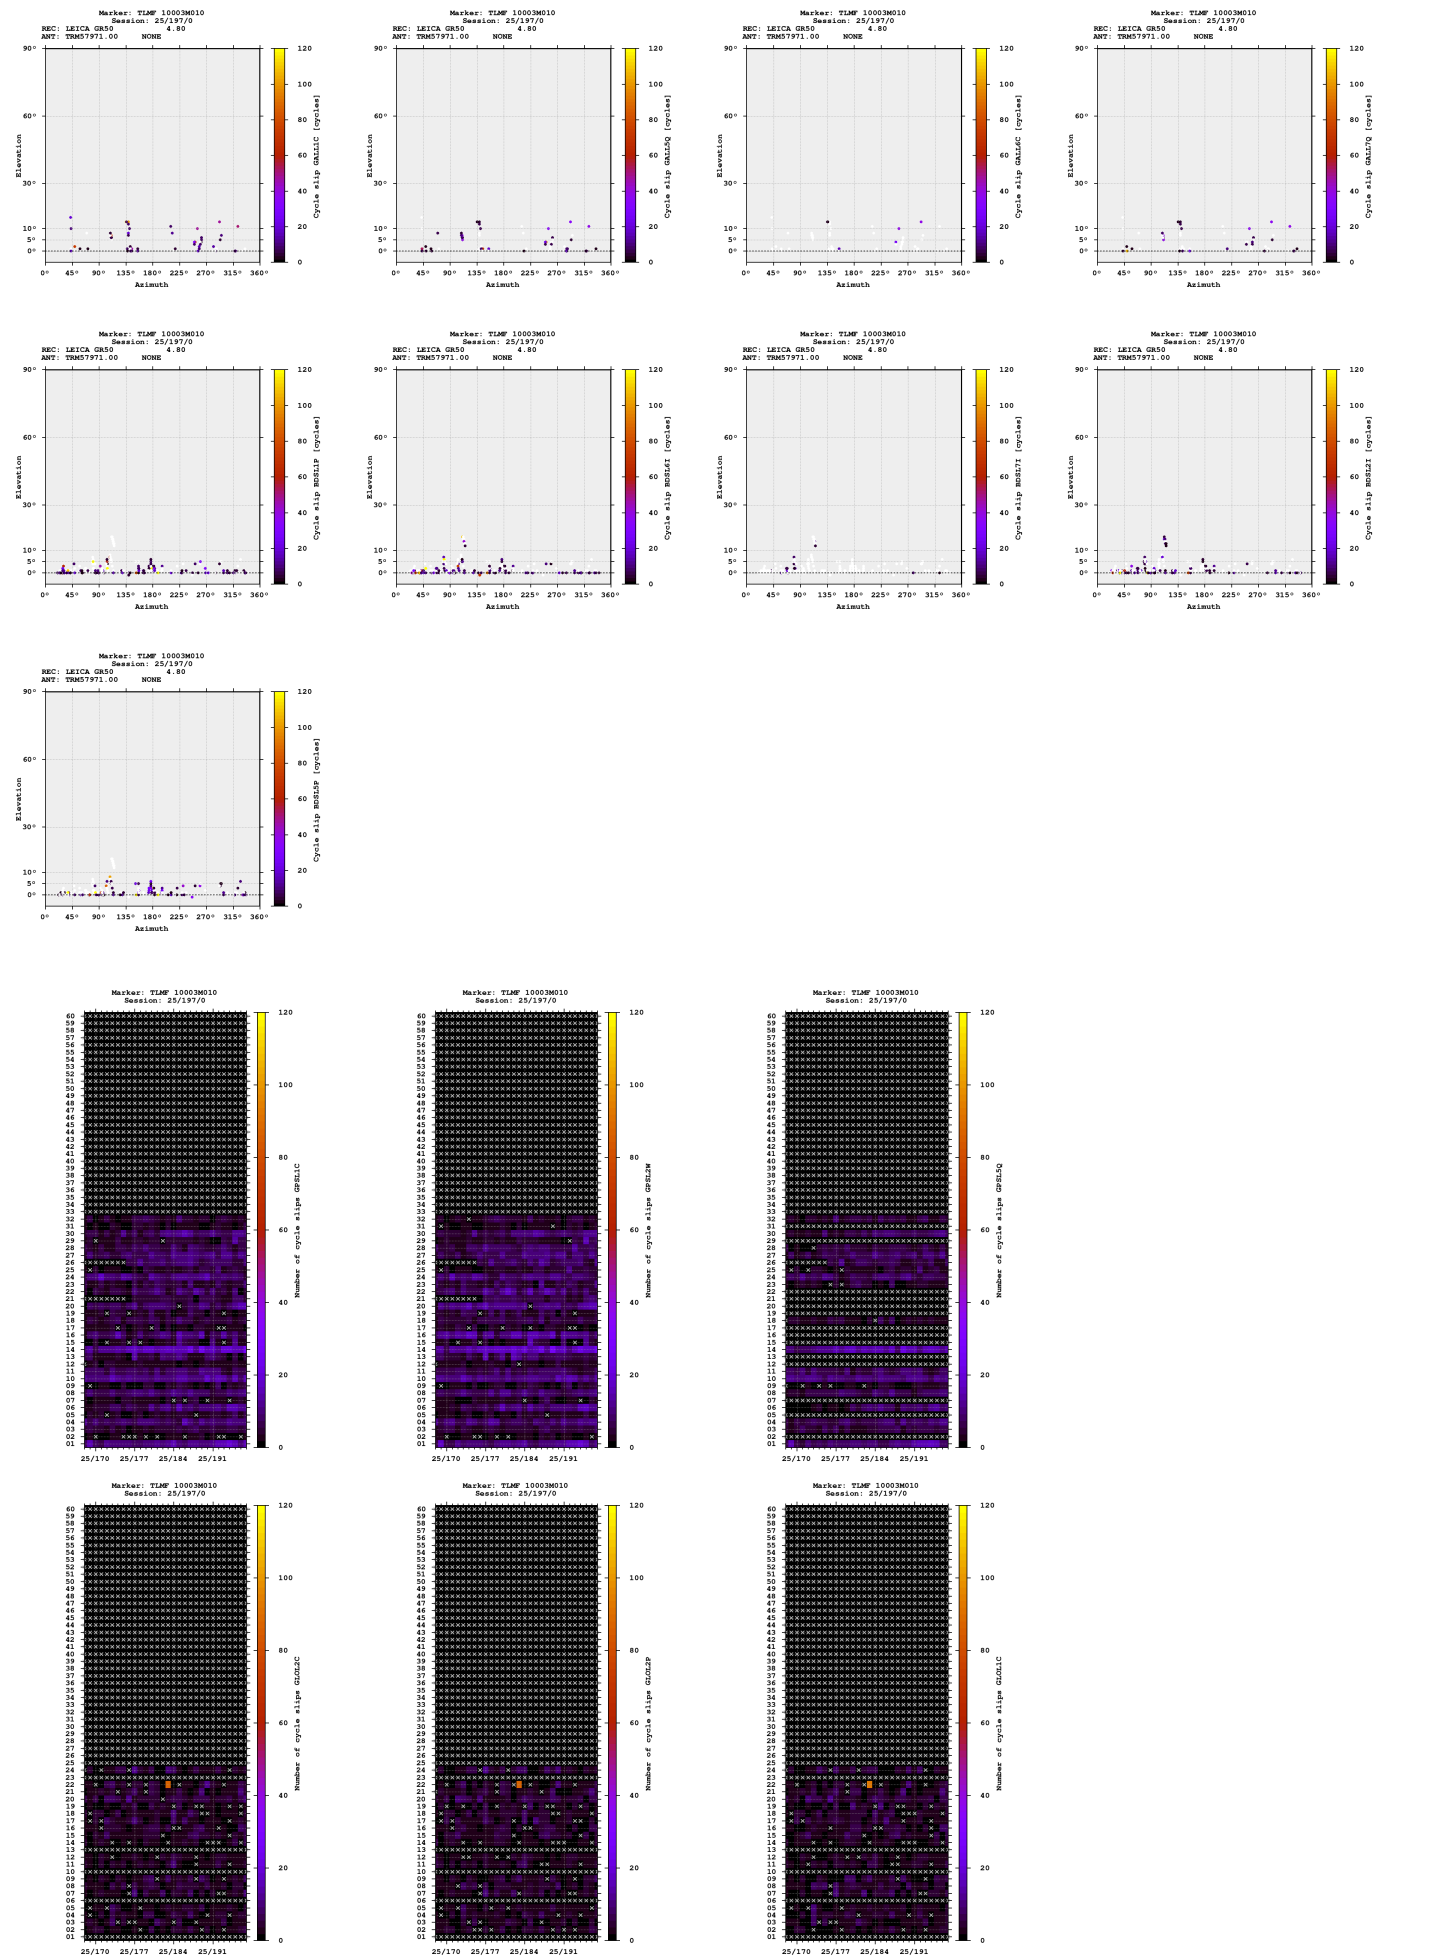



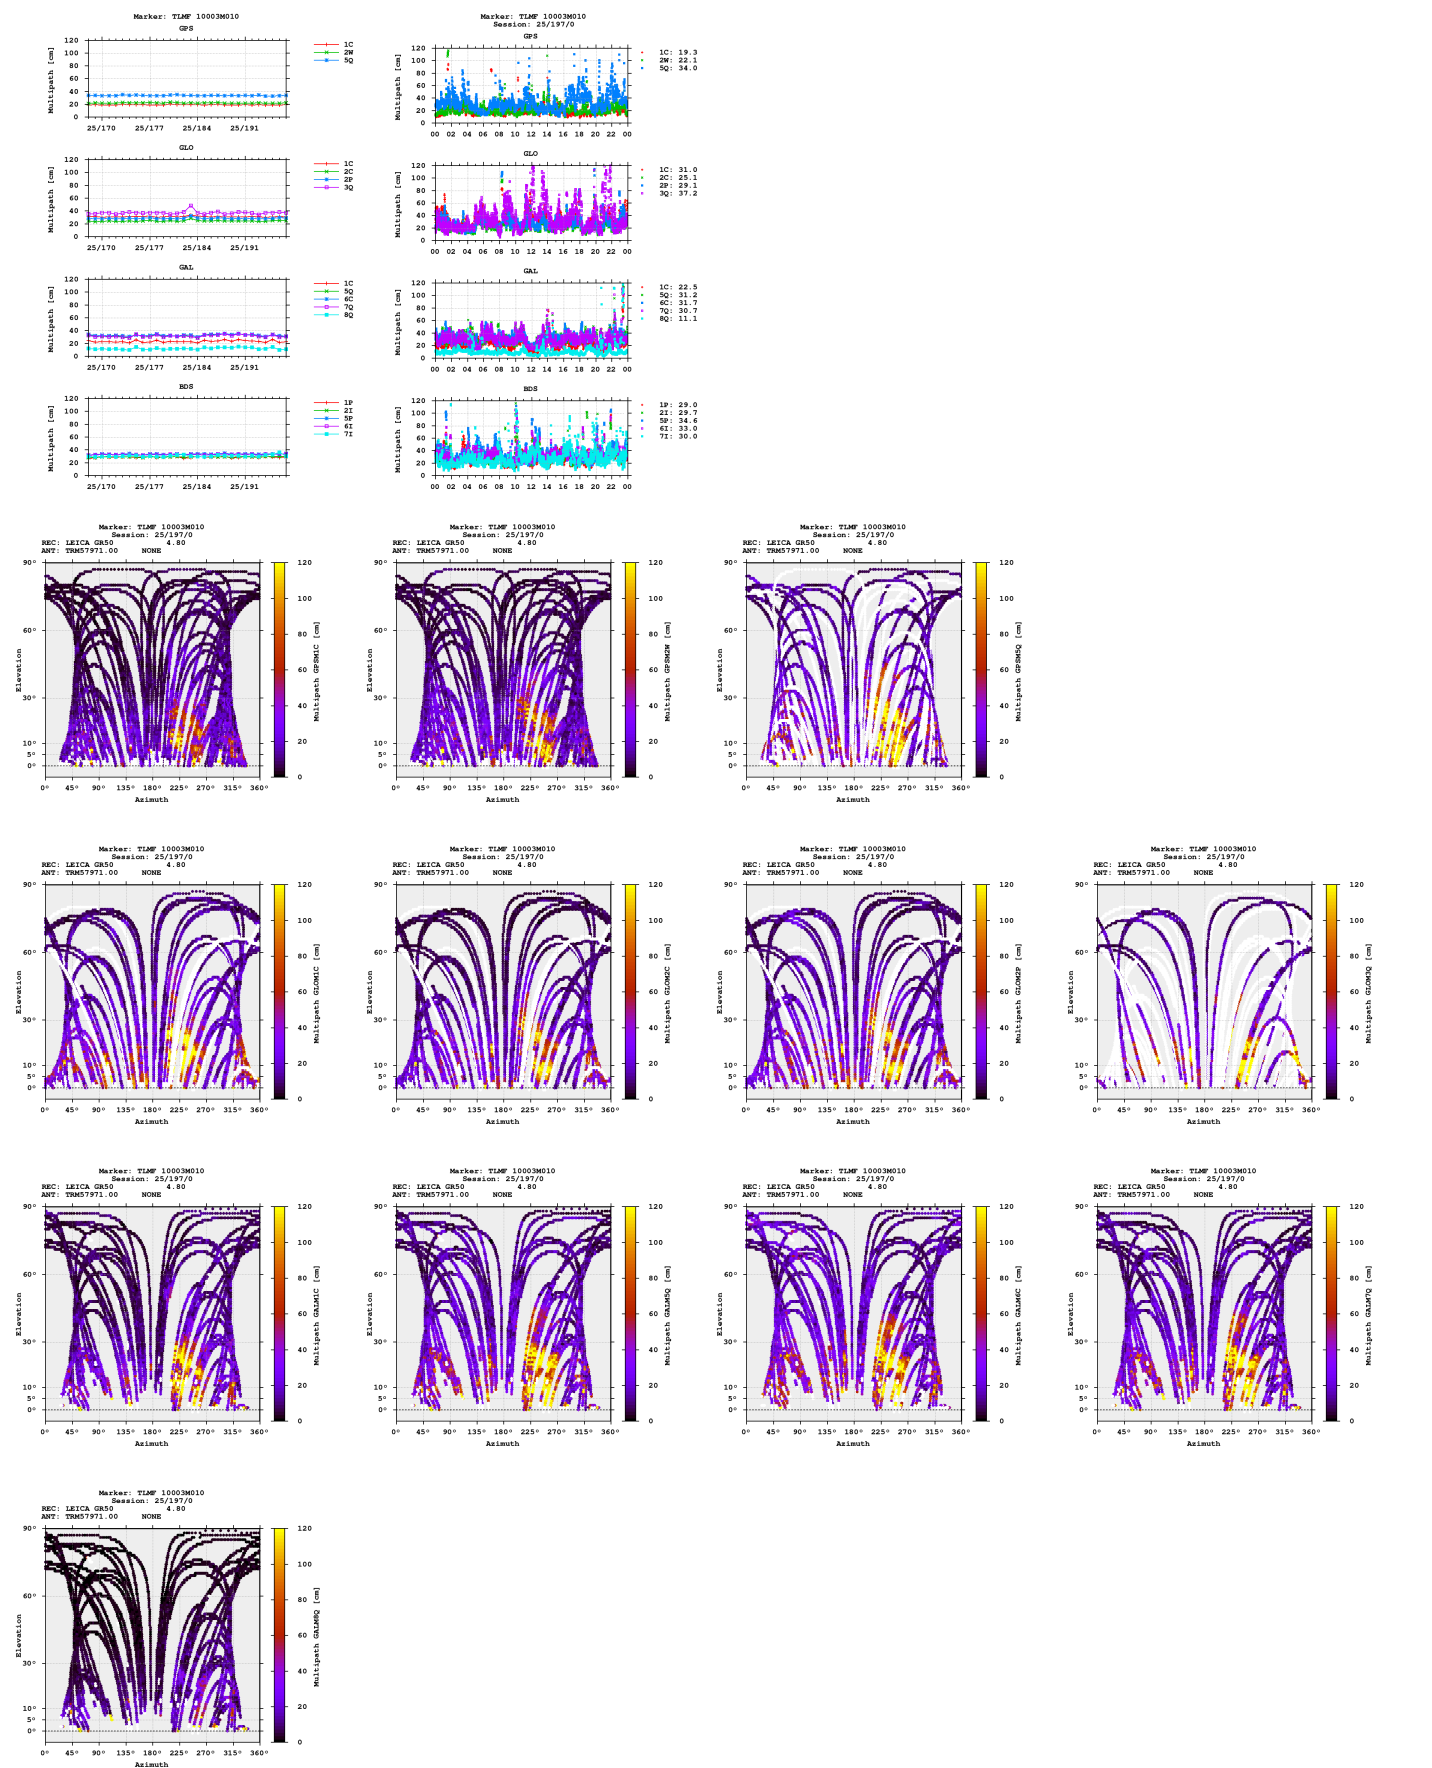


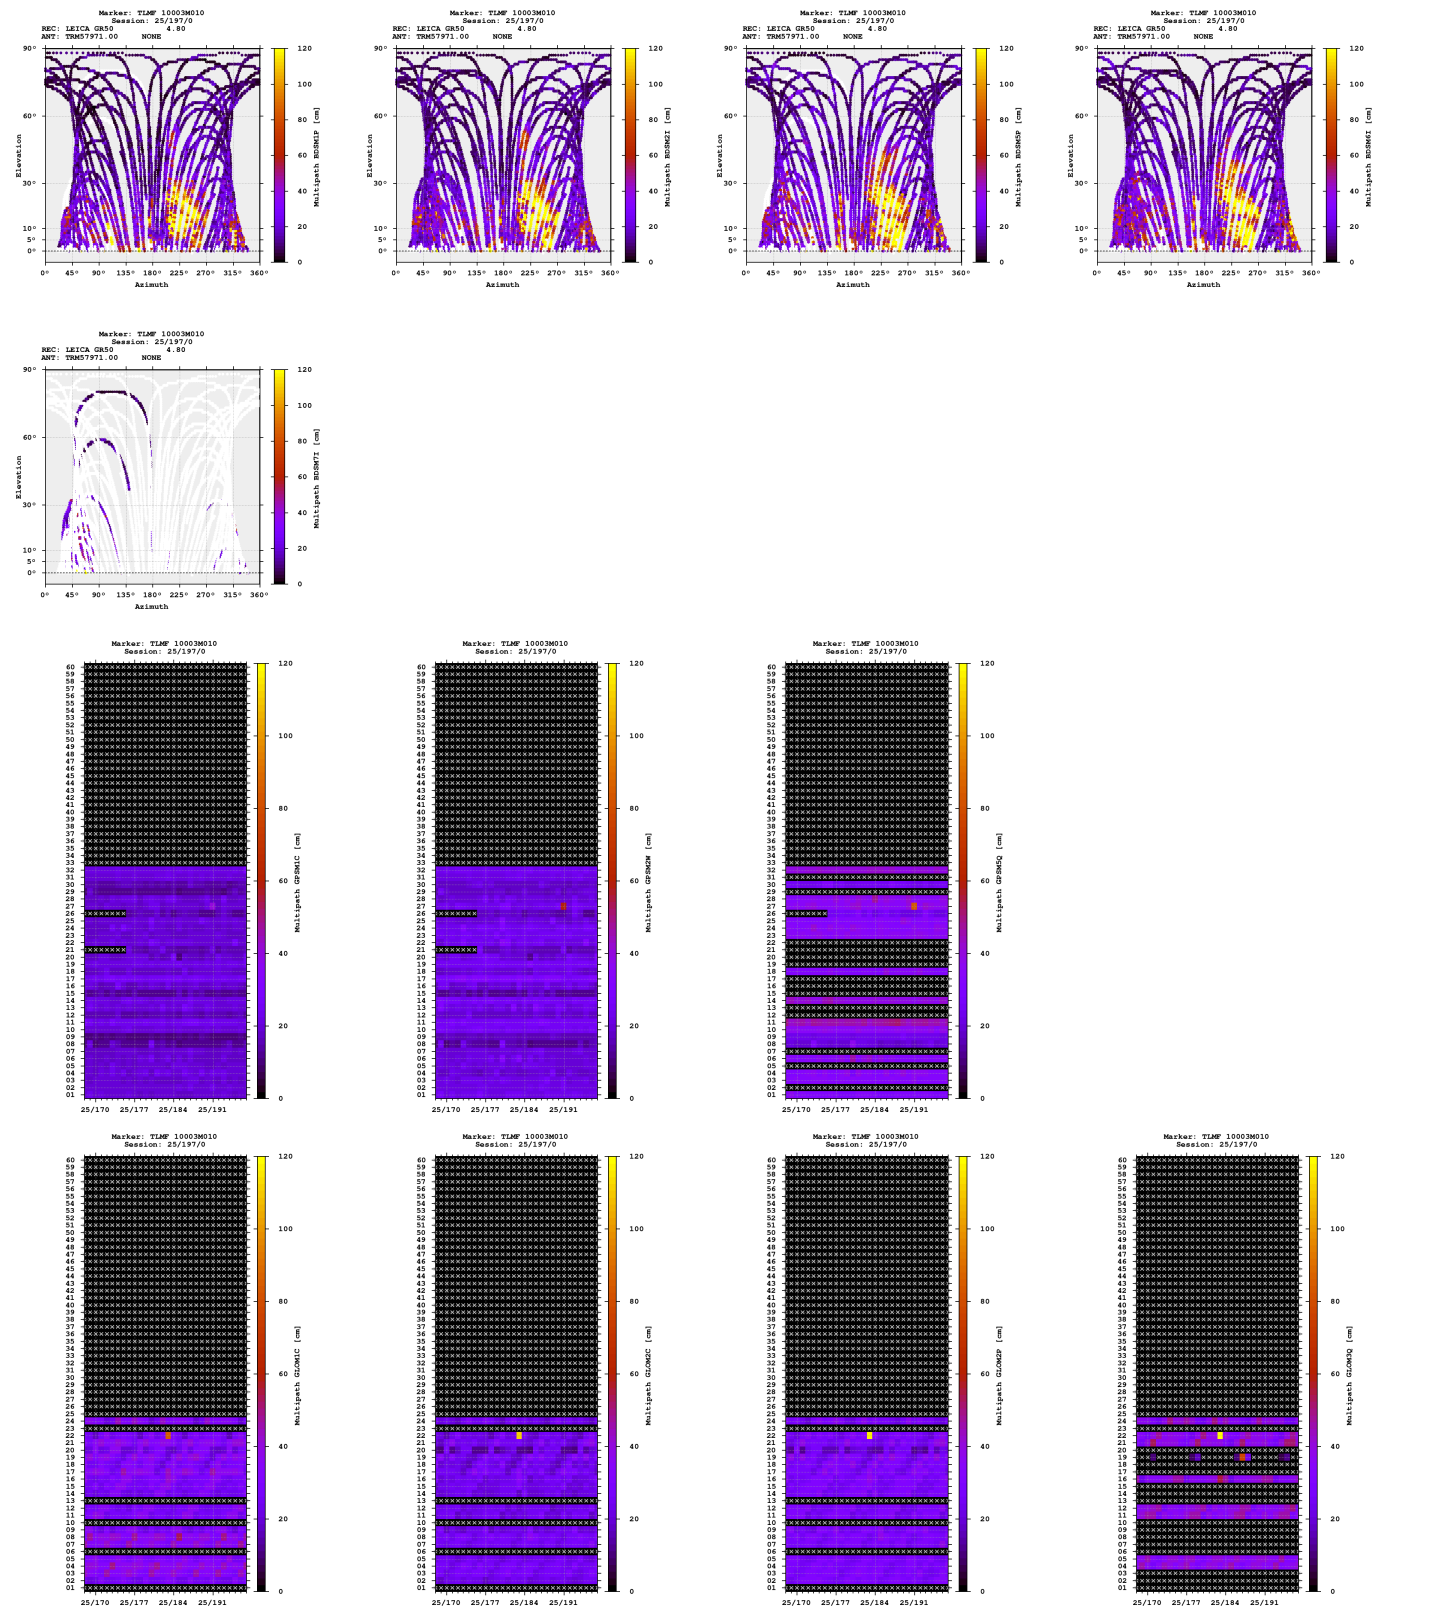


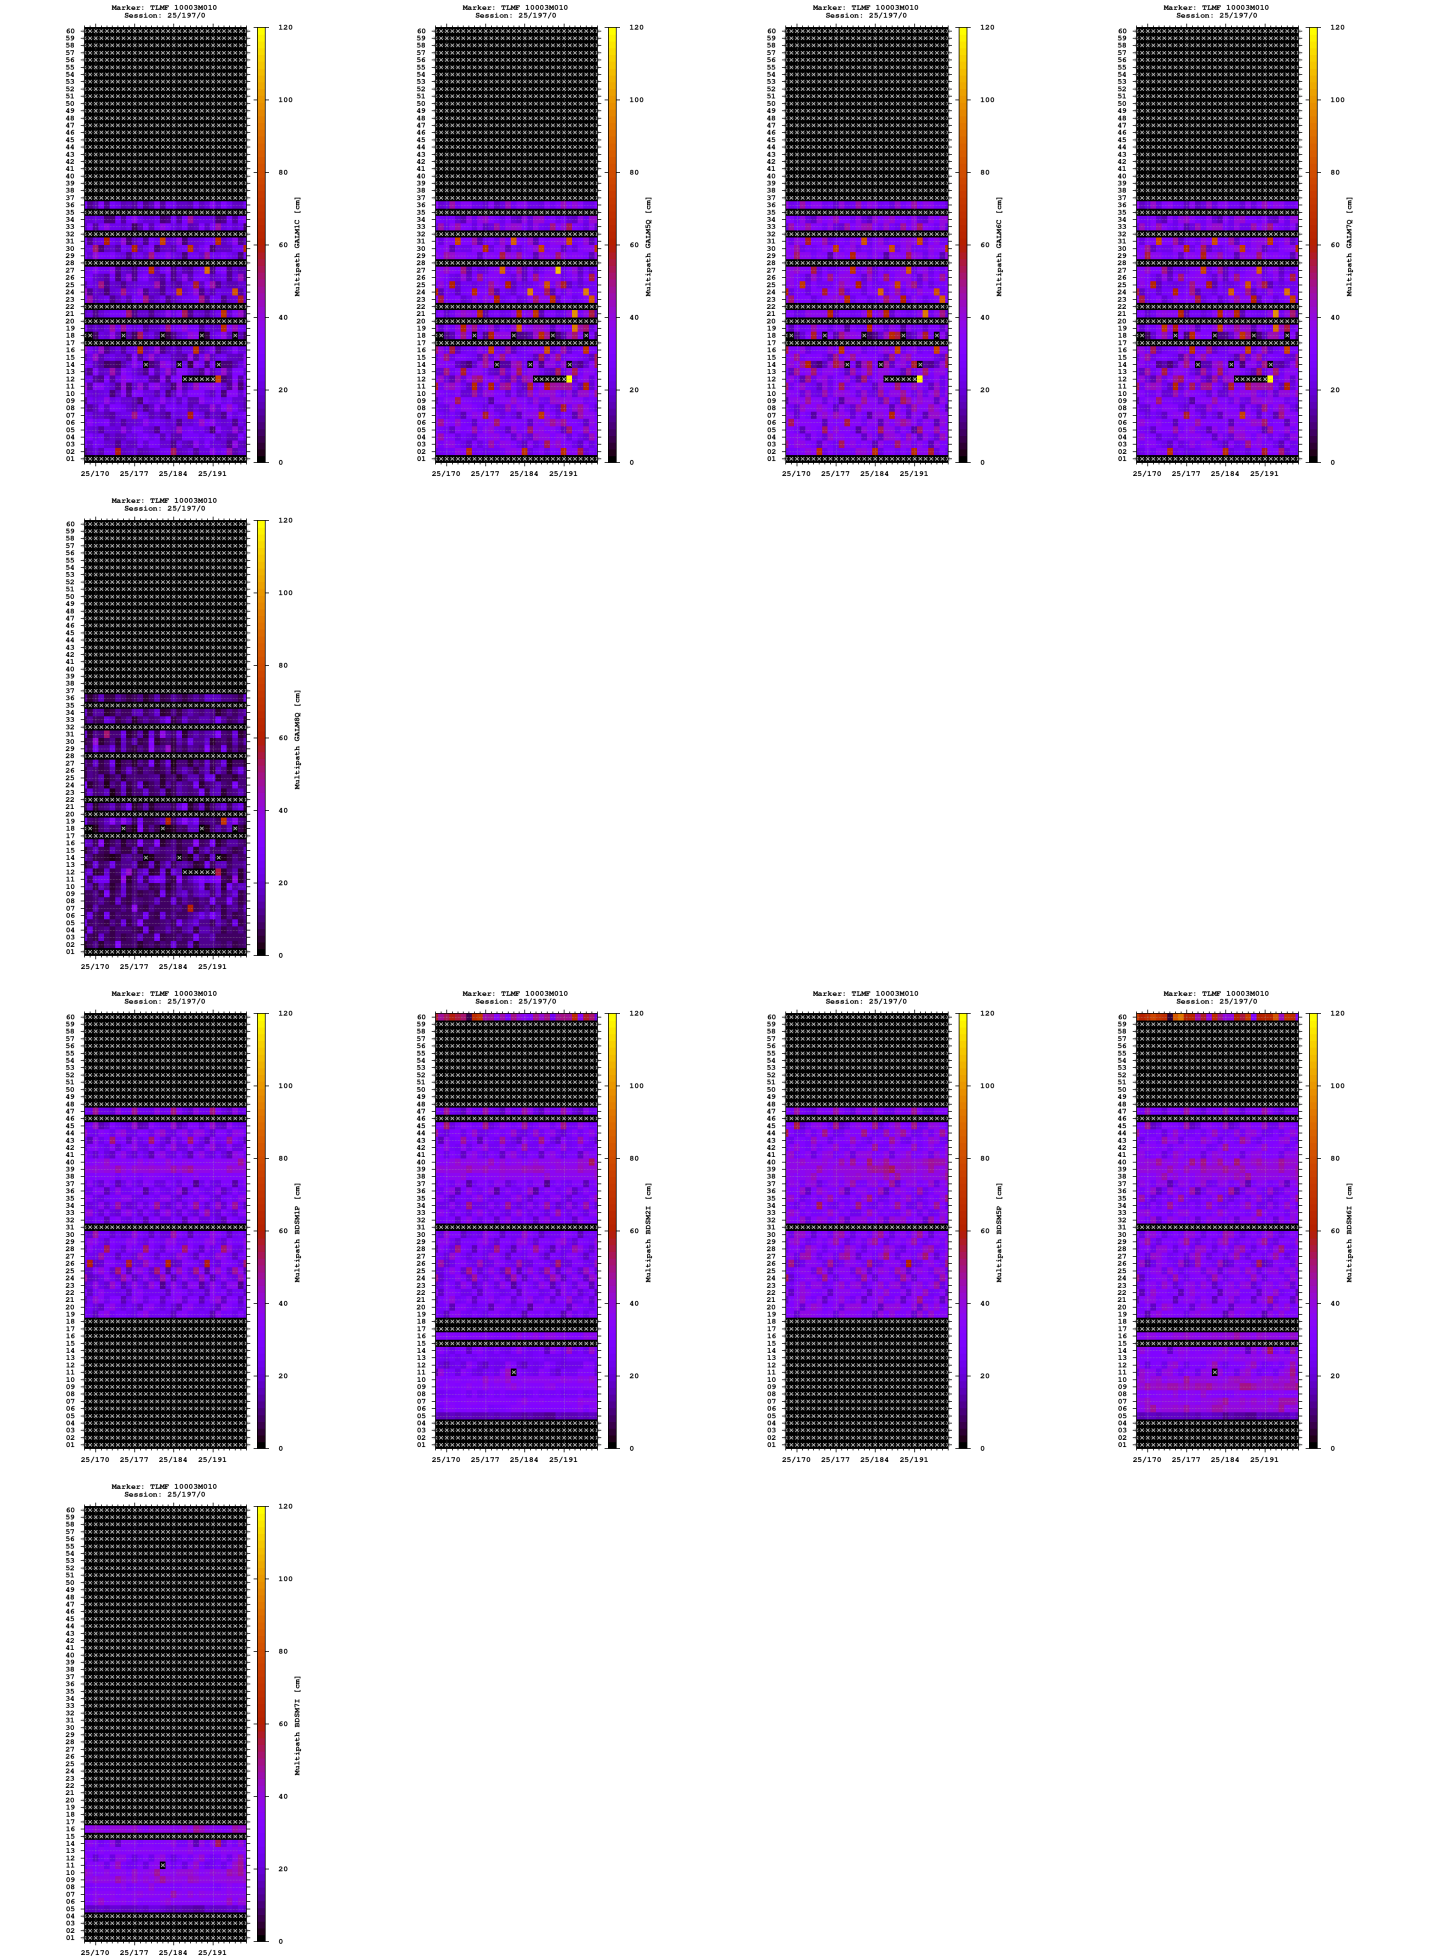



- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

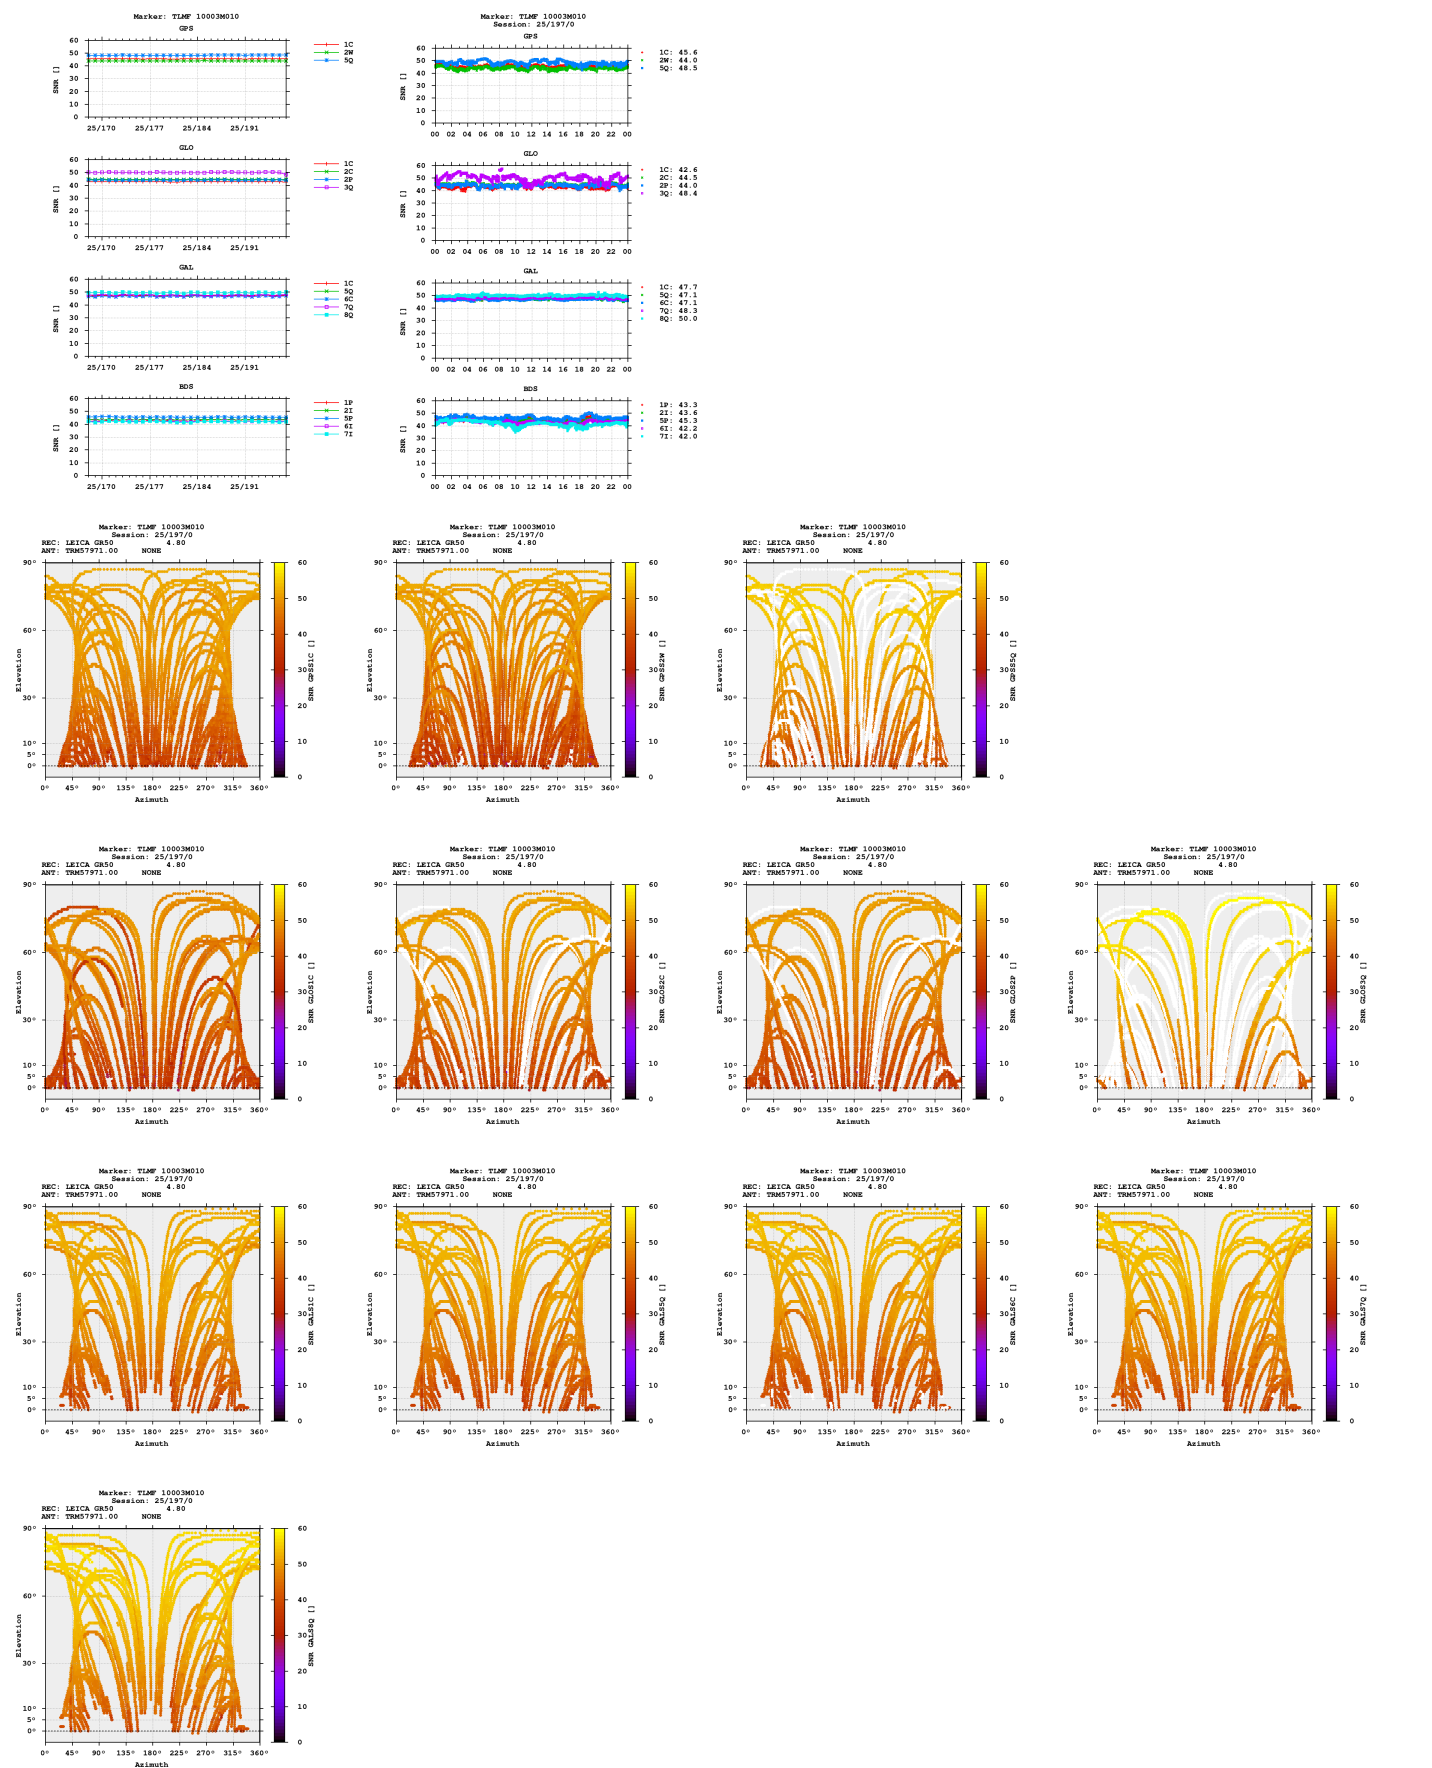

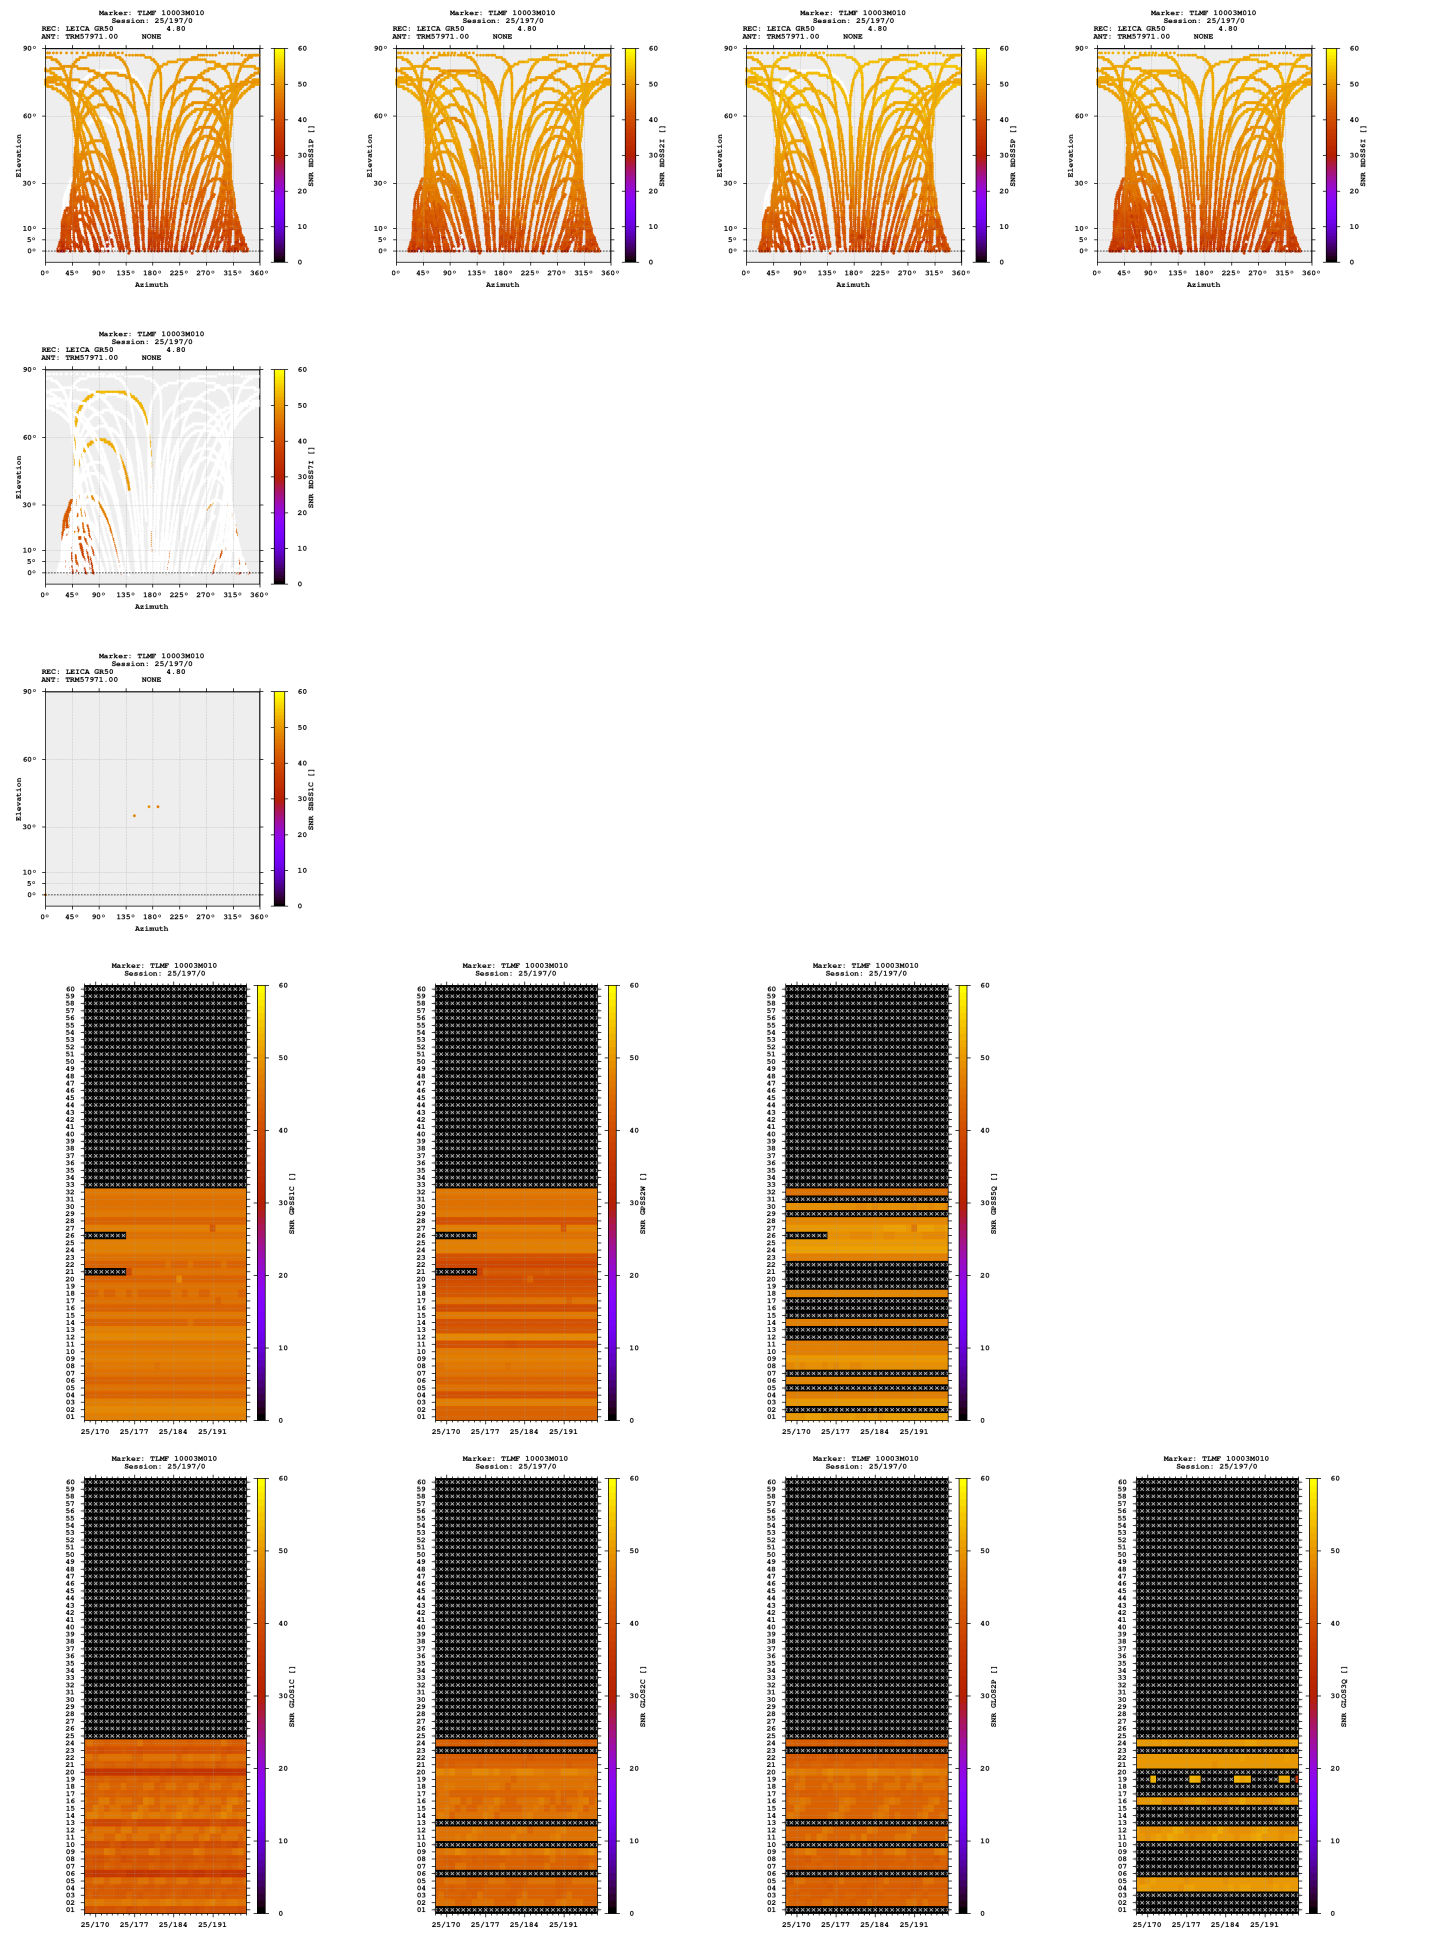


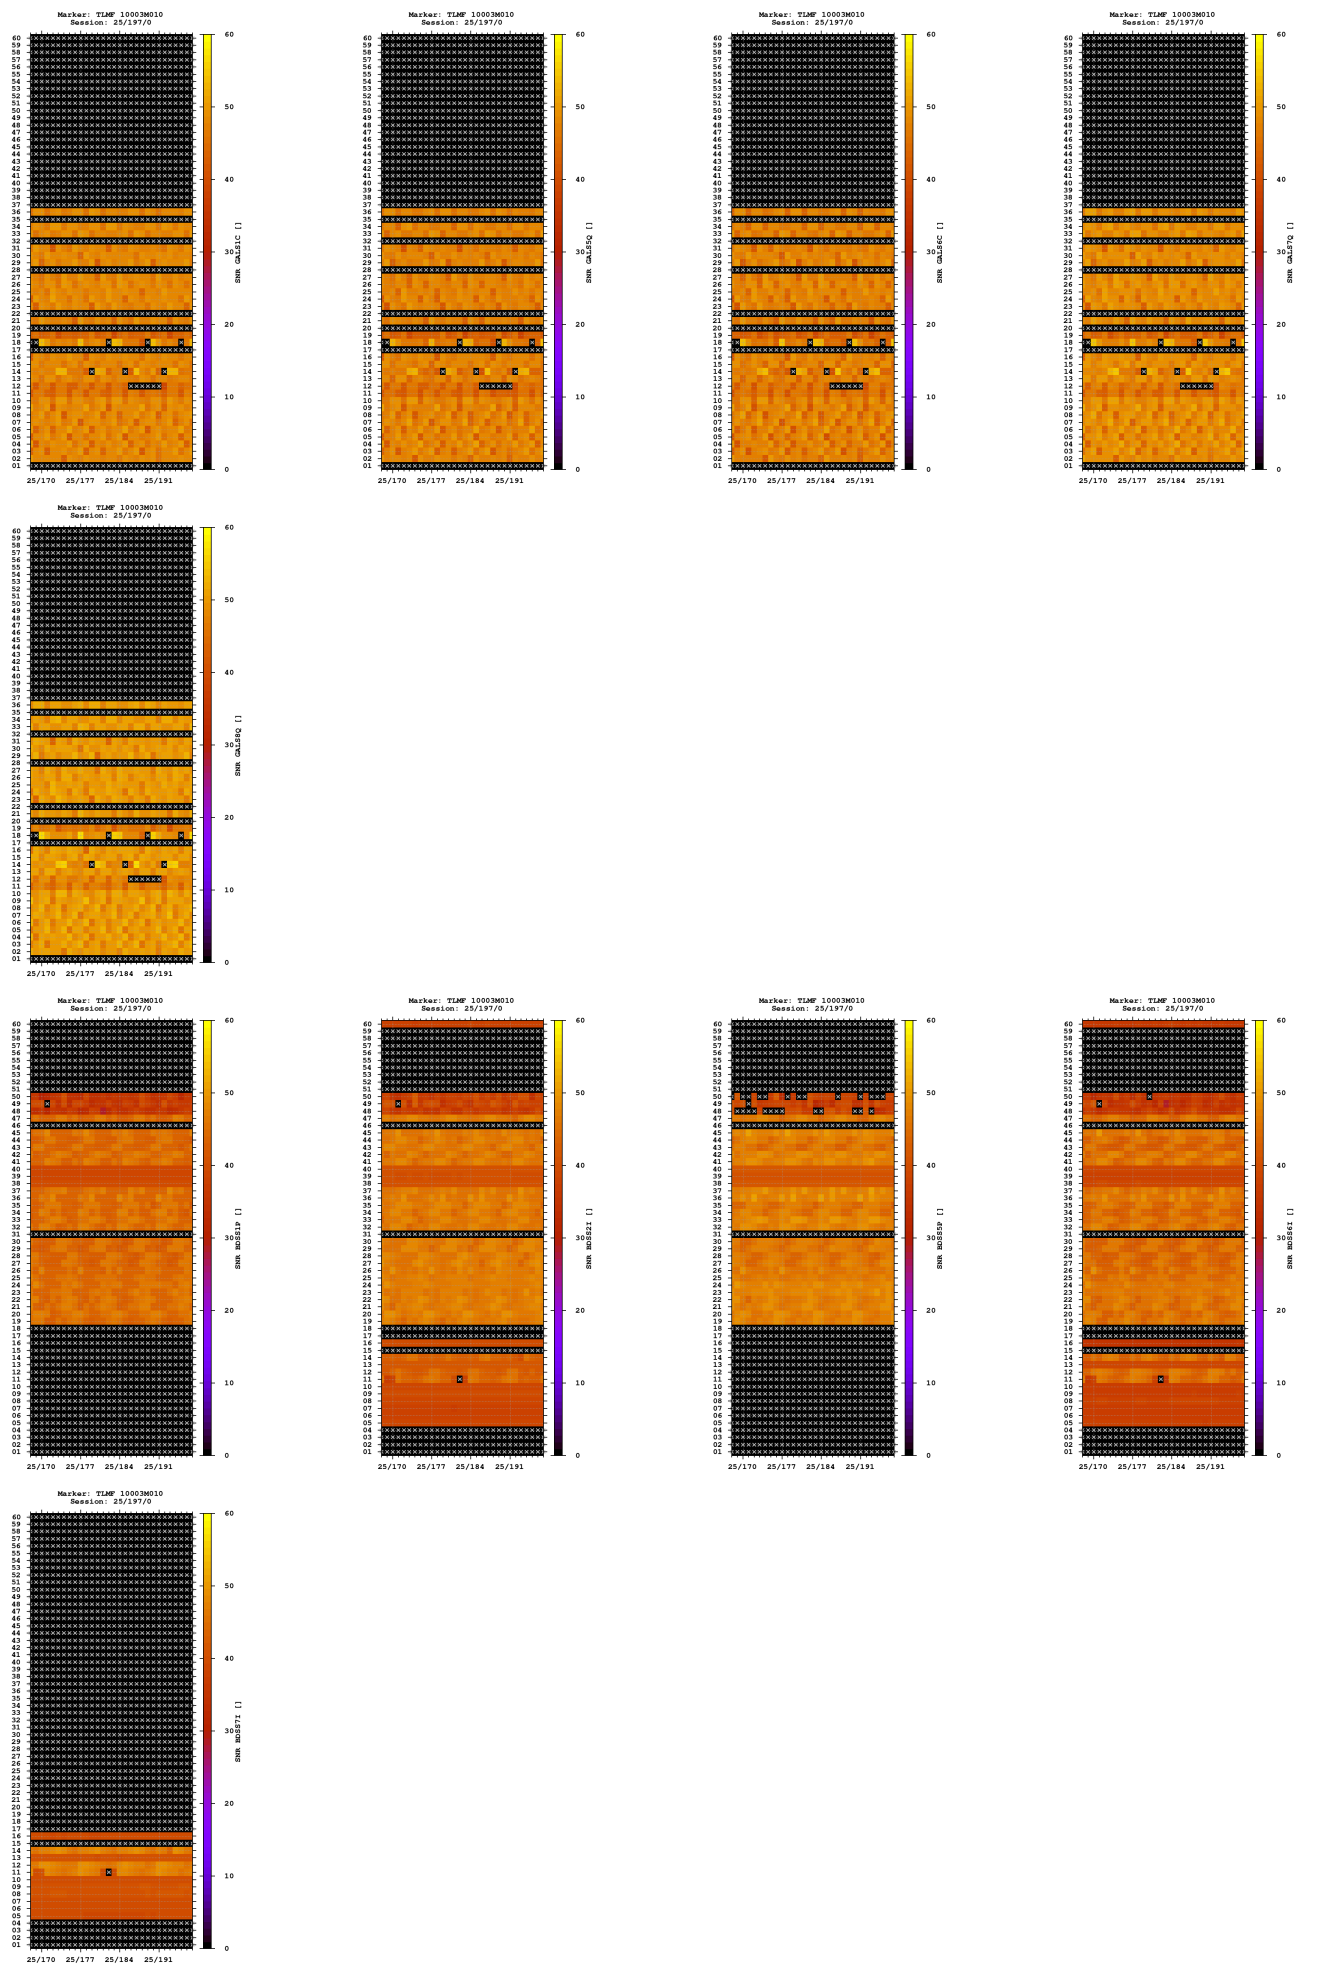

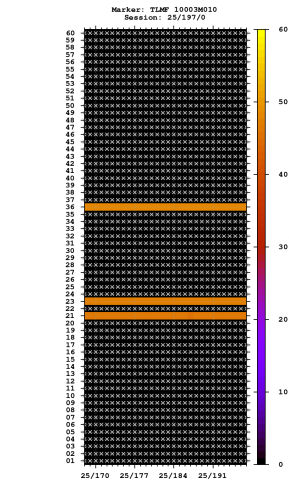

Estimates

2025-07-16 00:00:00	GPS	4627009.5904	111069.7771	4374123.3260	43.574609986	1.375101441	221.0260
2025-07-16 00:00:00	GLO	4627010.3965	111069.2041	4374122.9962	43.574603572	1.375093725	220.5887
2025-07-16 00:00:00	GAL	4627009.9726	111069.8695	4374123.4384	43.574608335	1.375102470	221.3820
2025-07-16 00:00:00	BDS	4627009.8070	111070.1234	4374124.2989	43.574614935	1.375105662	221.8596

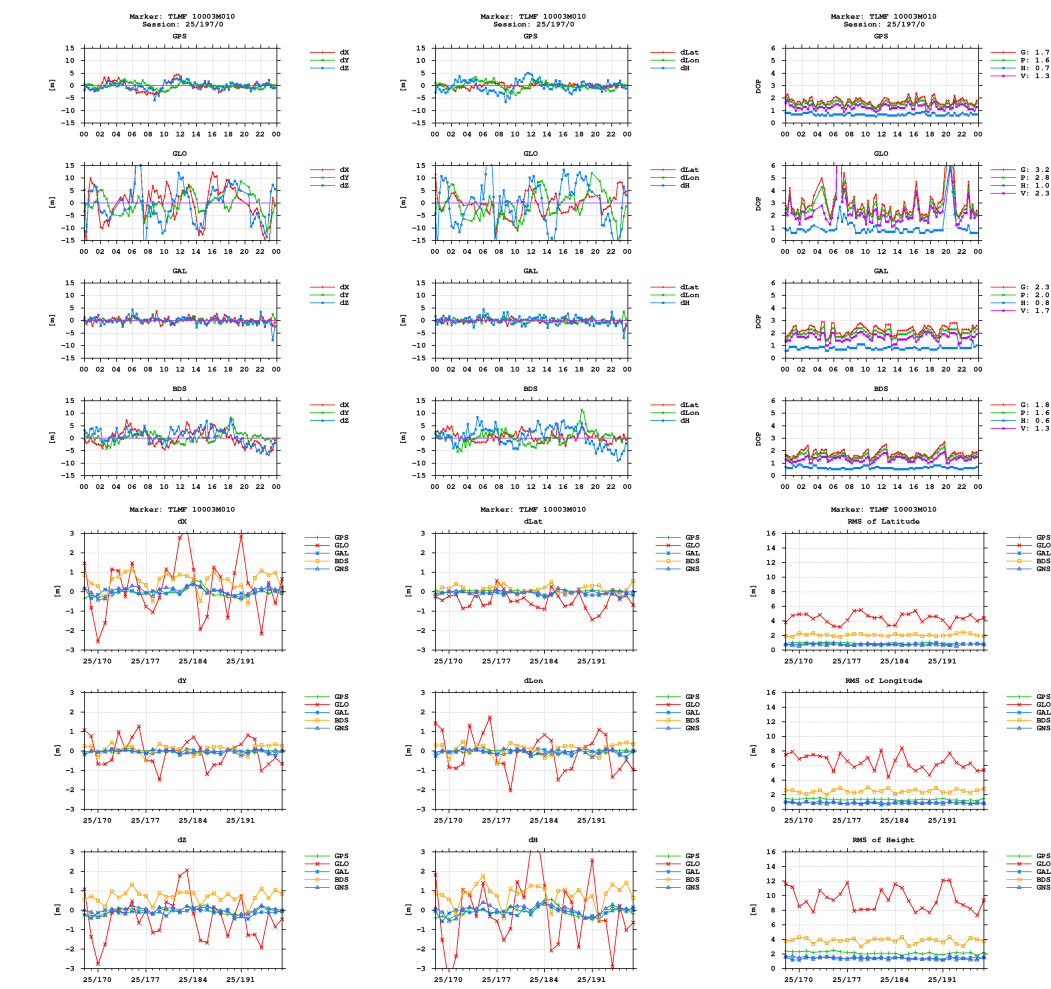

Equipment

2025-06-17 00:00:00 LEICA GR50 4.80 2090084 LEICA GR50

Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)