

GNSS observation file monitoring for TLSE

Last RINEX file: TLSE1970.25D.Z


RINEX version: 3.04

Marker: TLSE 10003M009

Receiver: 6139R401 TRIMBLE ALLOY 6.21

Antenna: 5129354206 TRM59800.00 NONE


Epochs

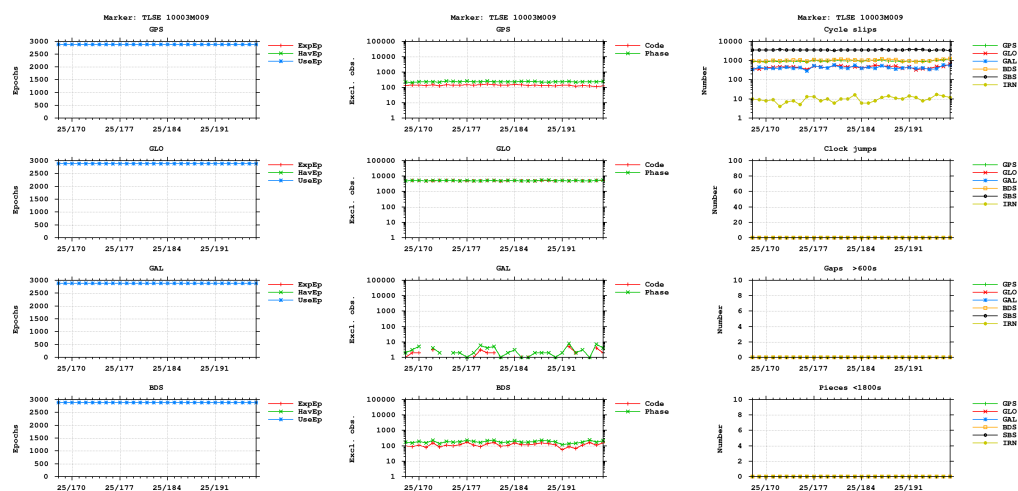


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites


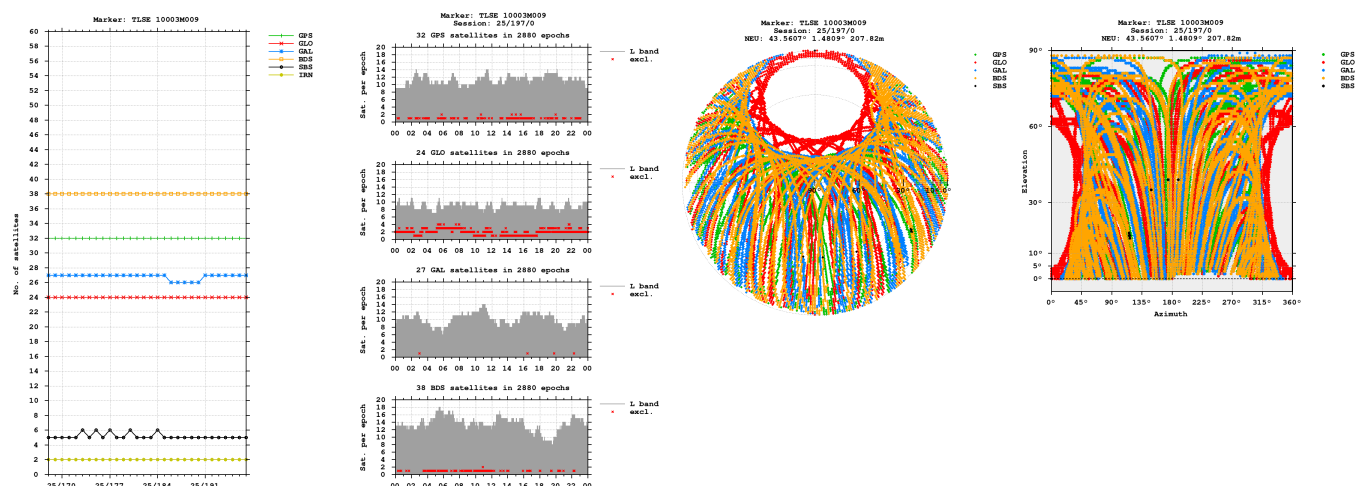


Bands
















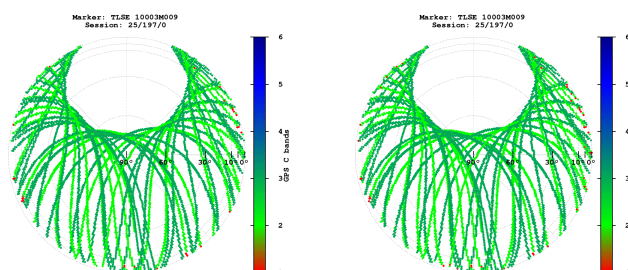


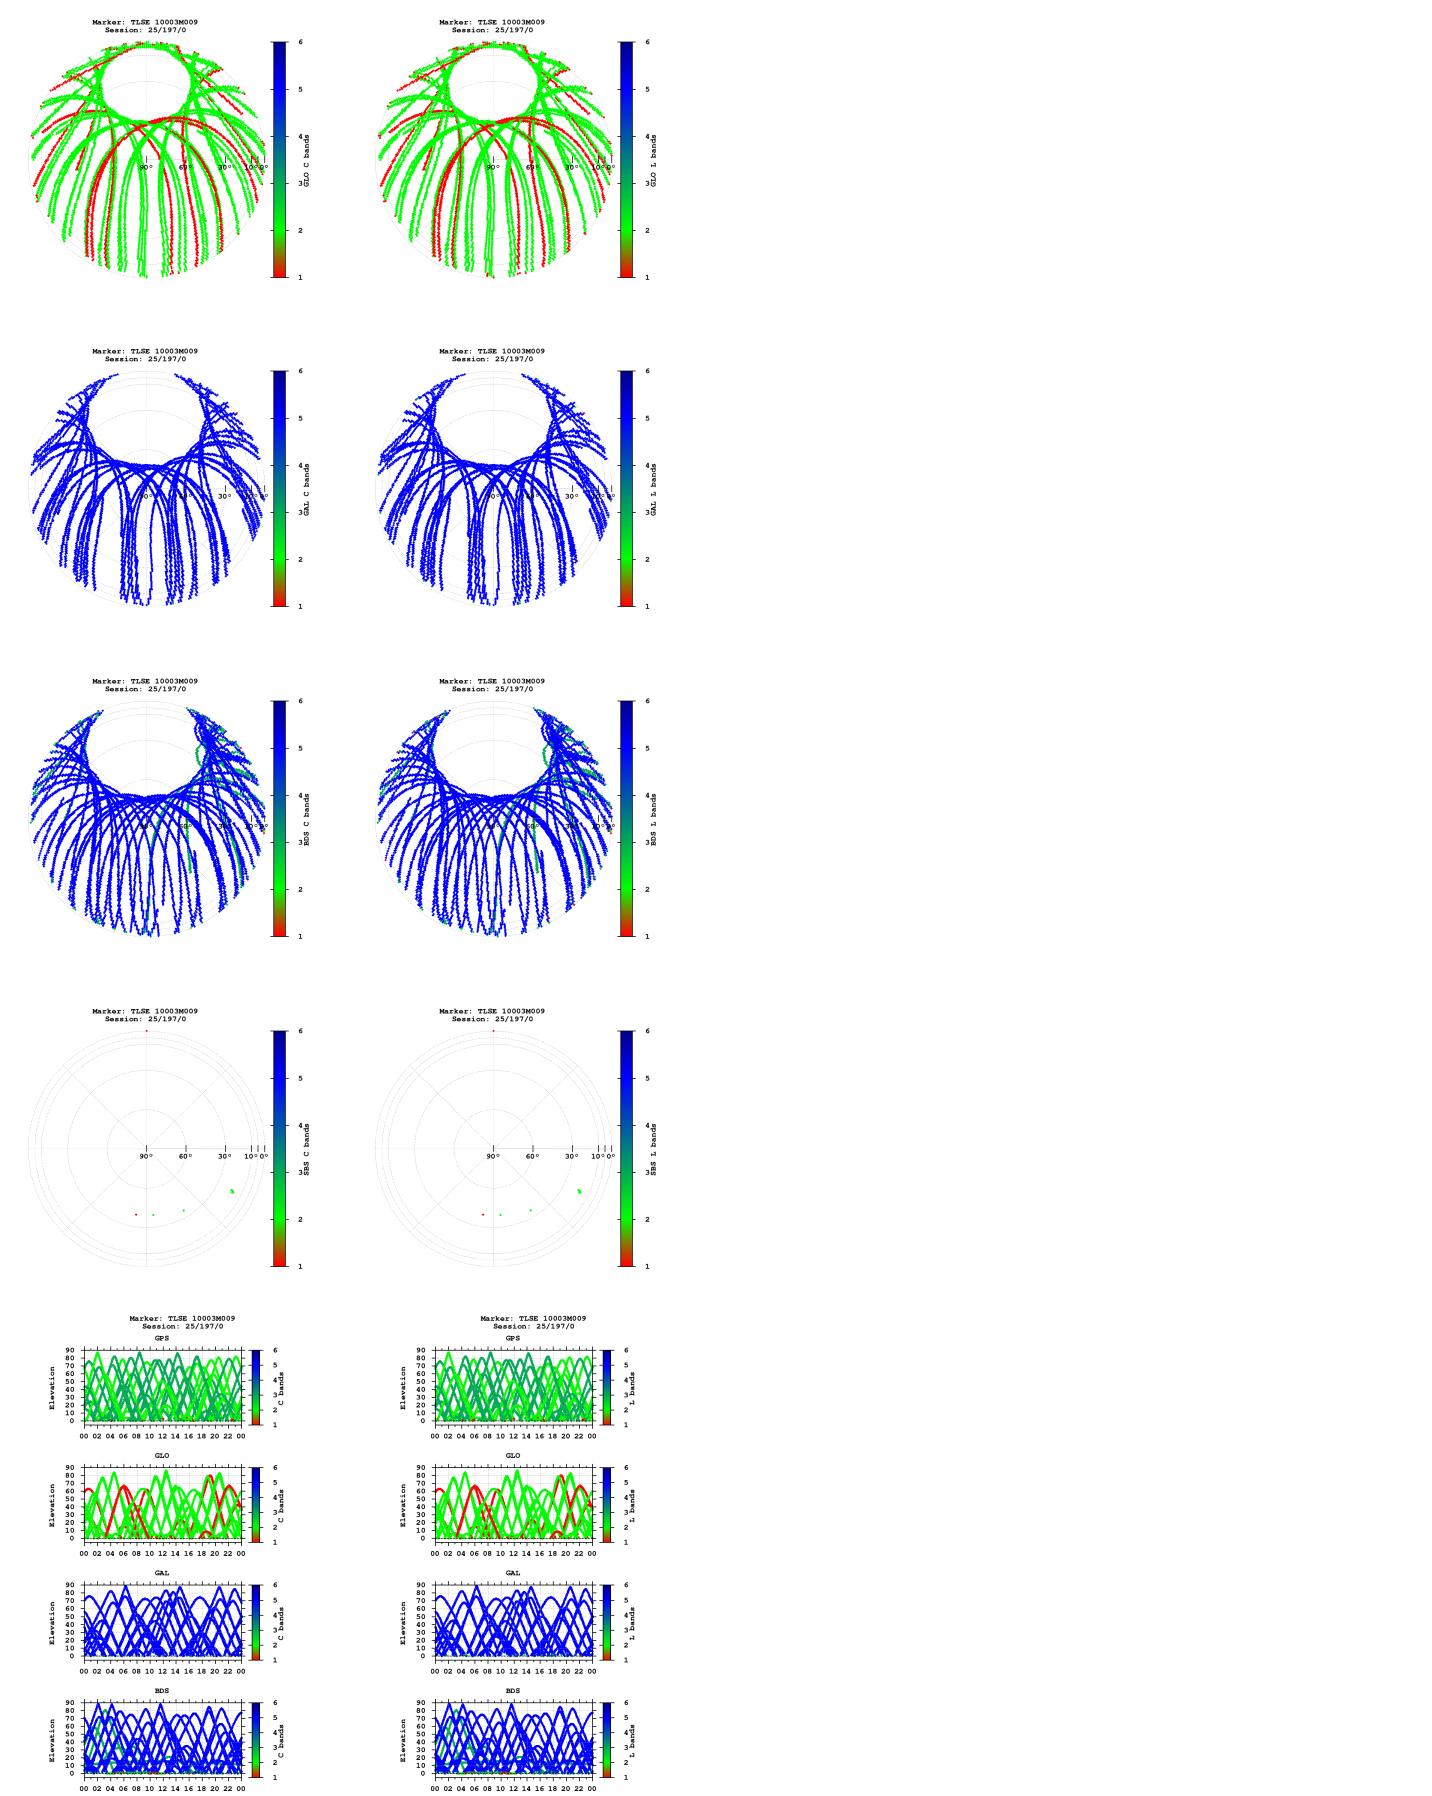





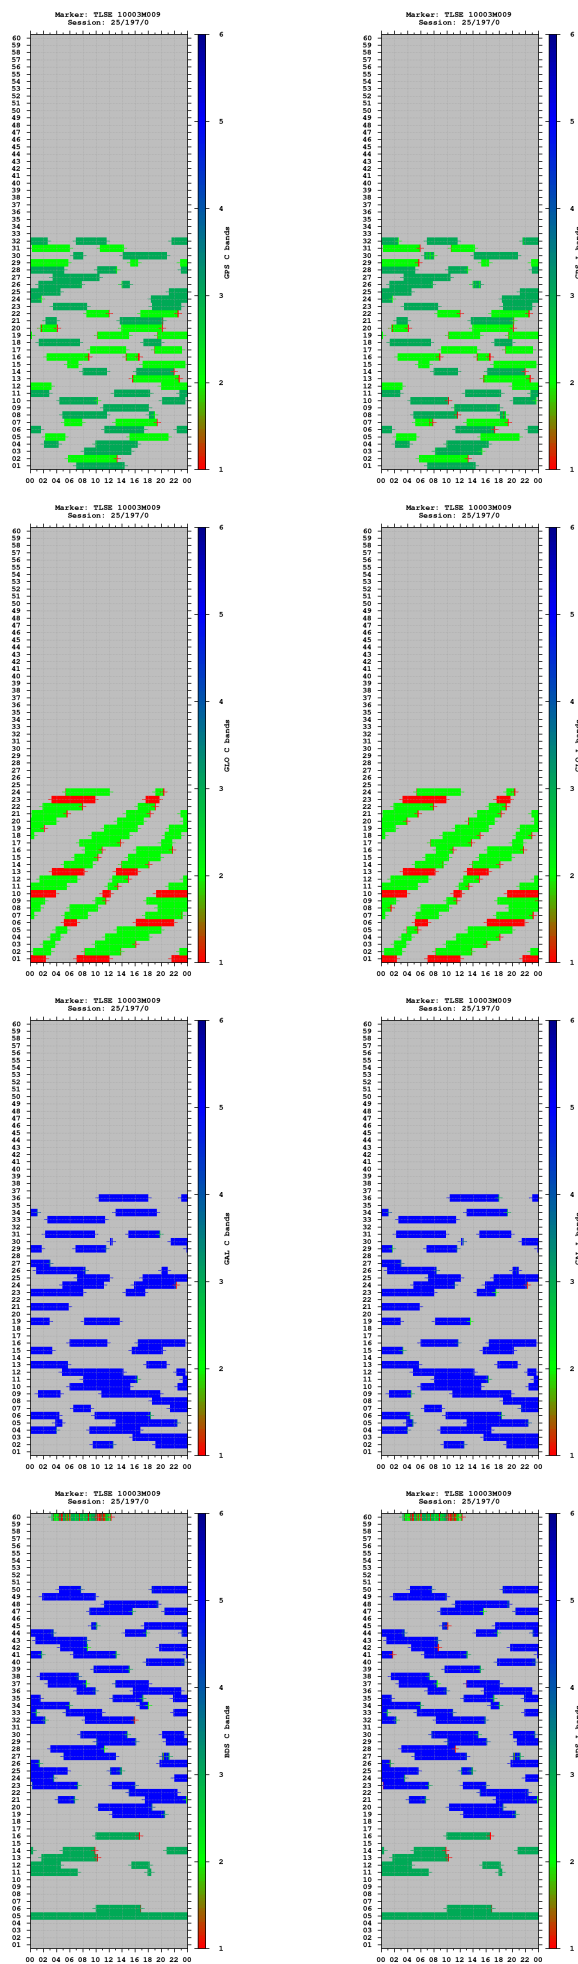


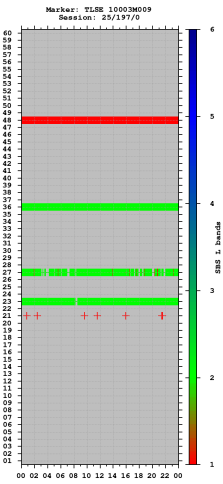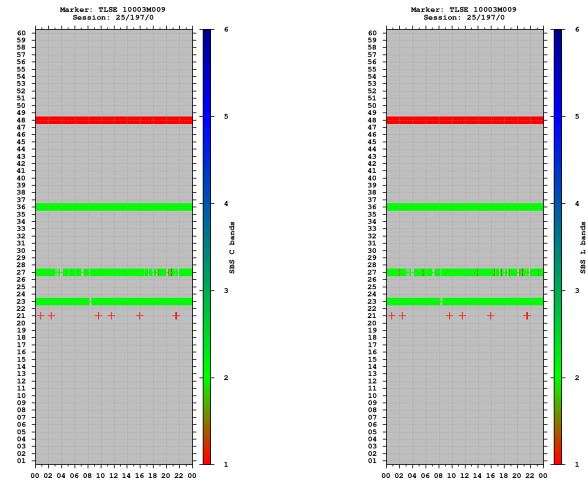

Observations

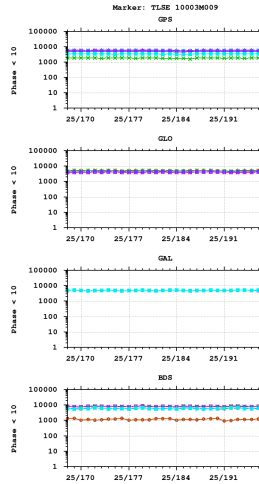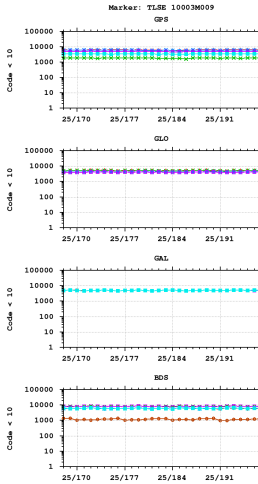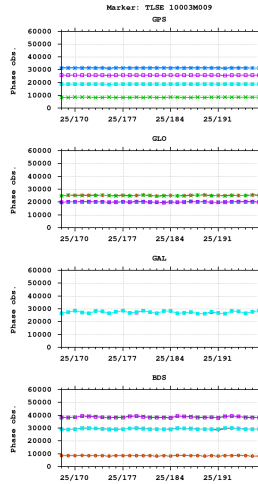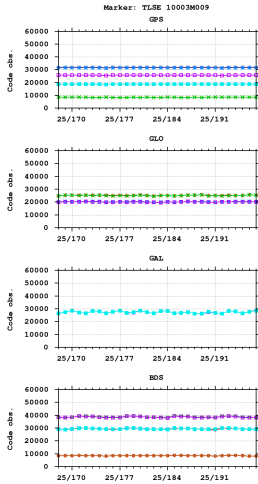


Cycle slips












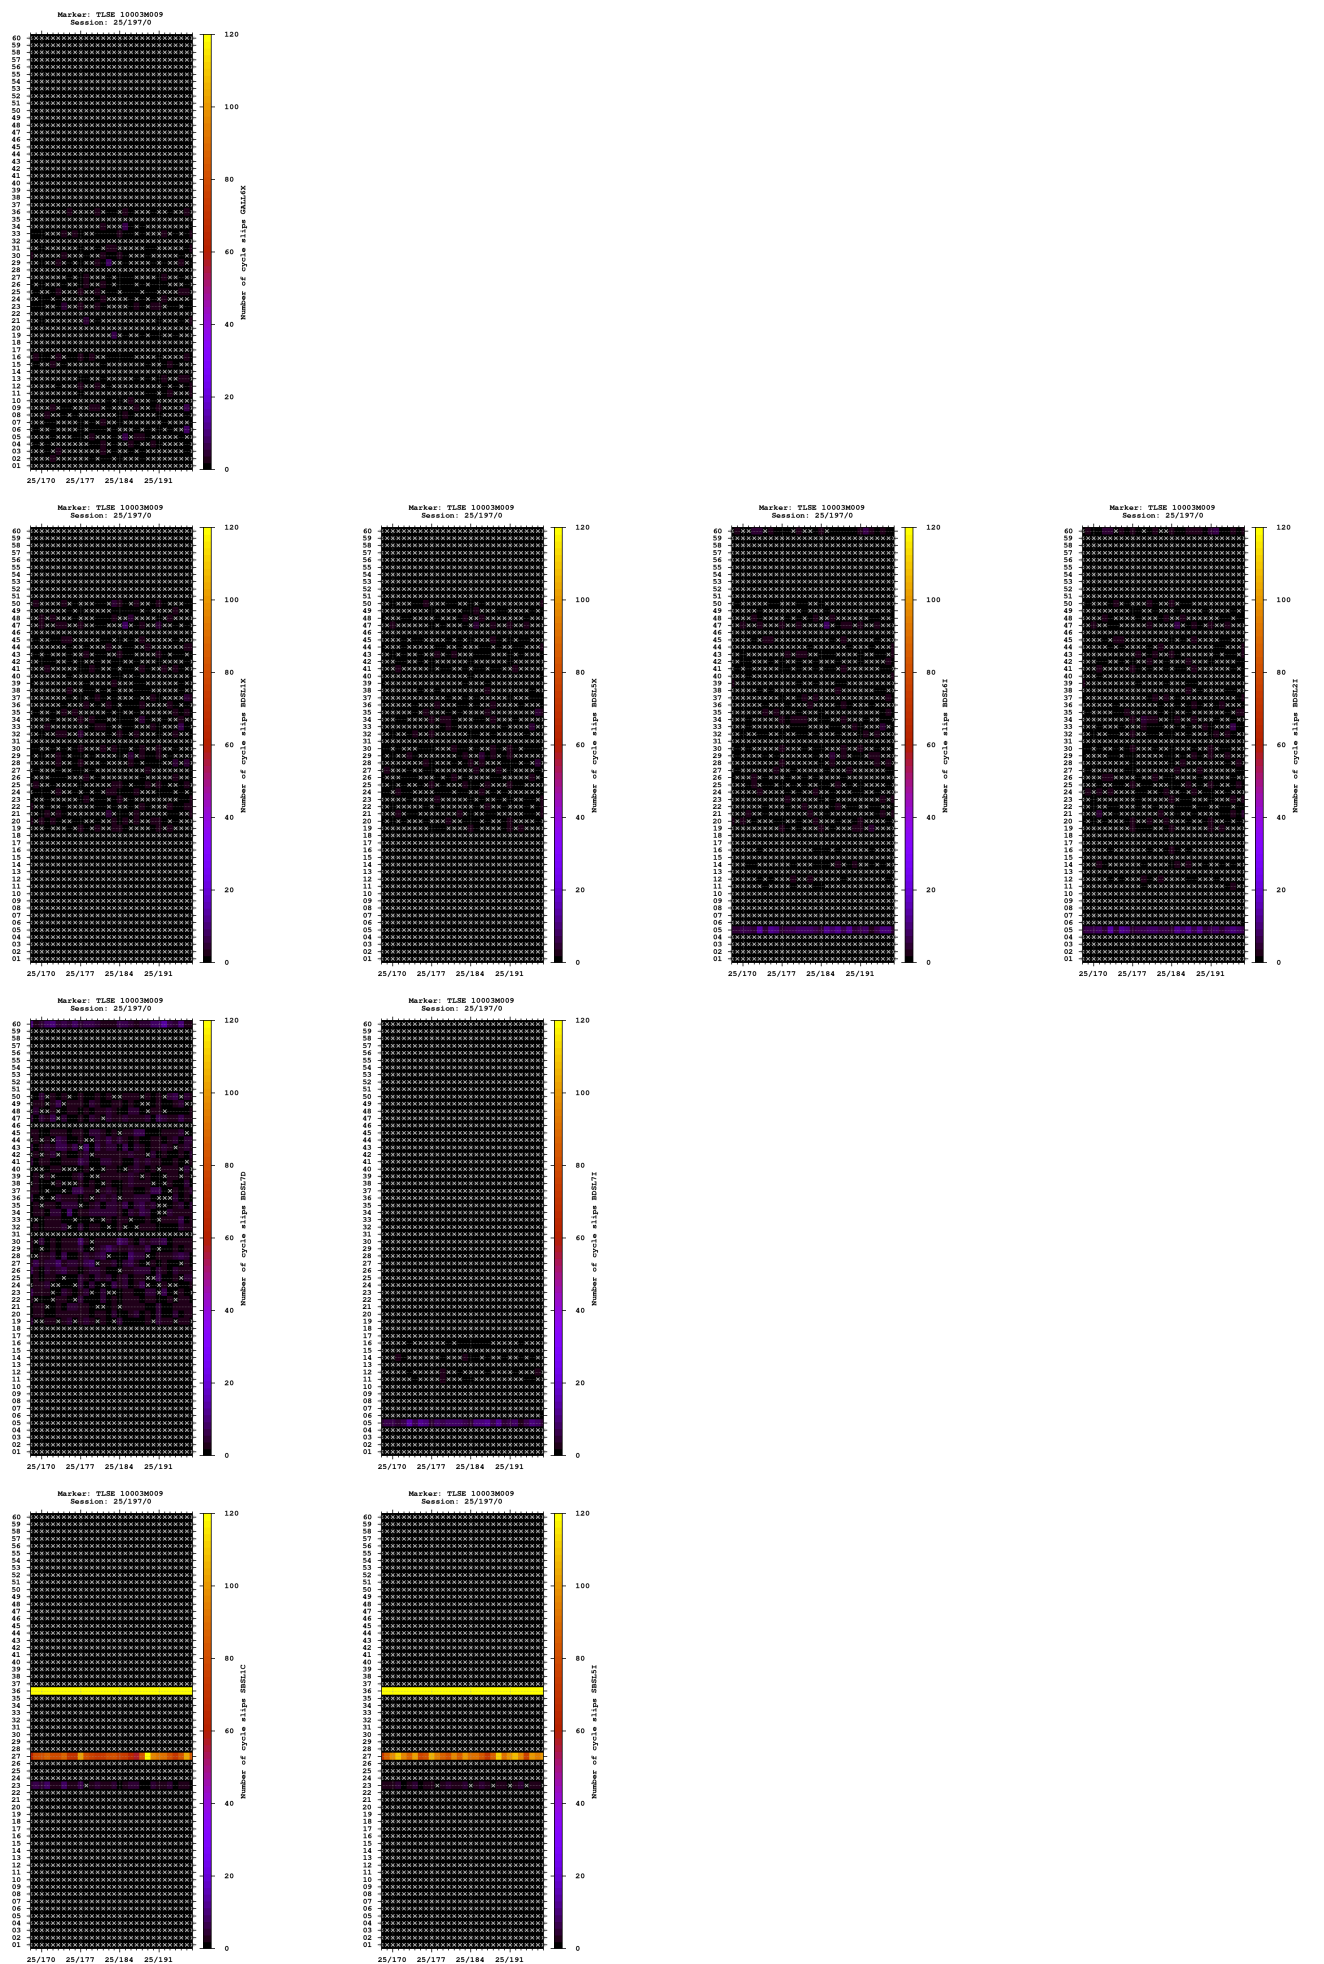


Multipath



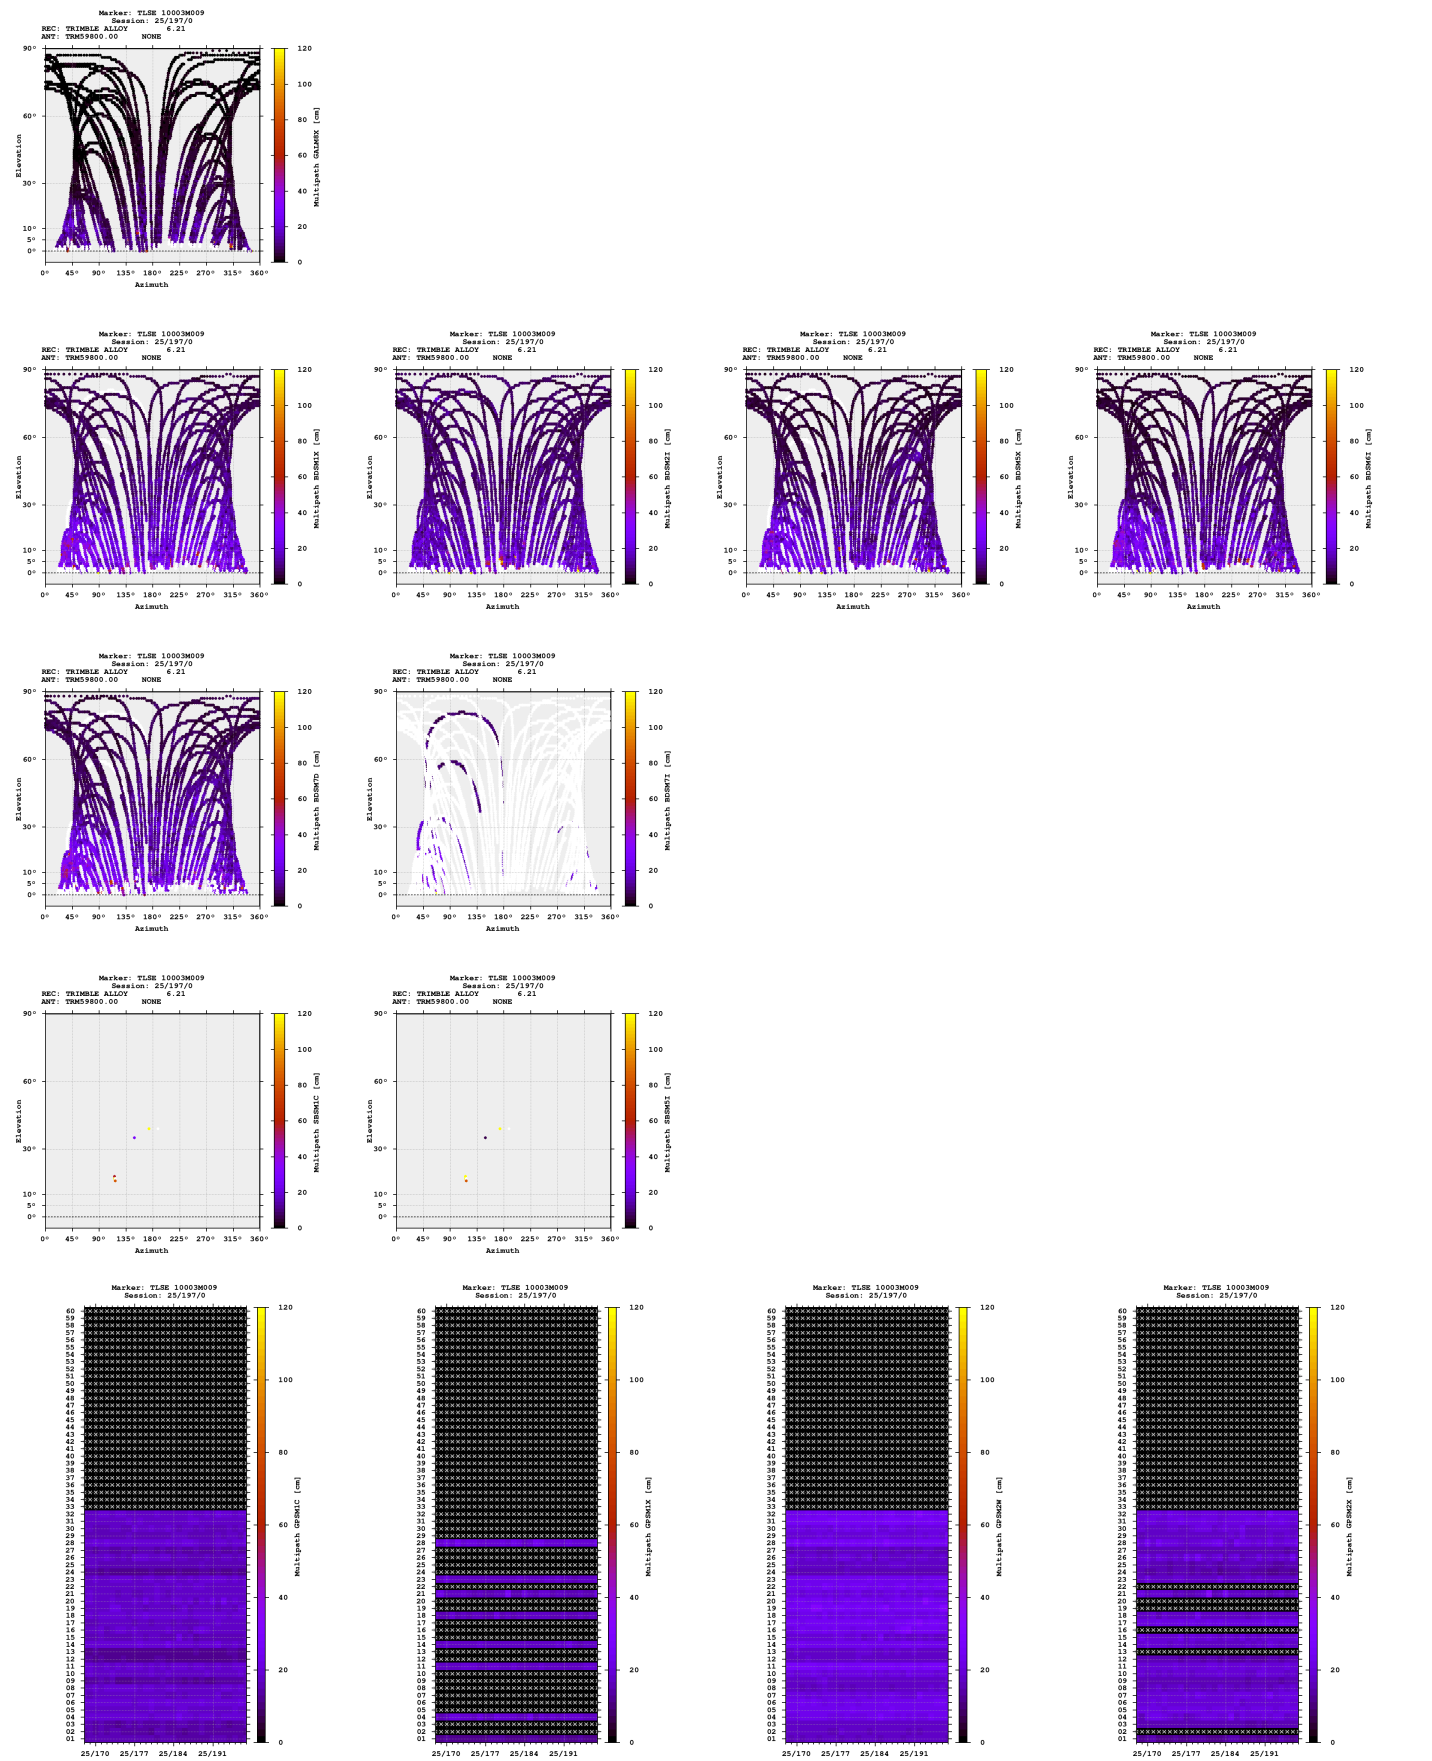


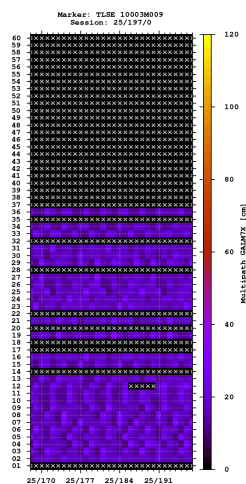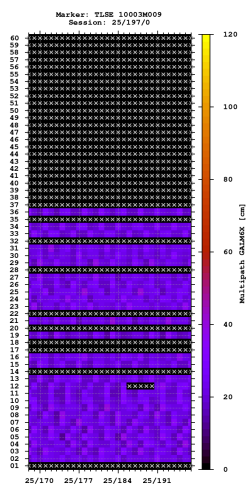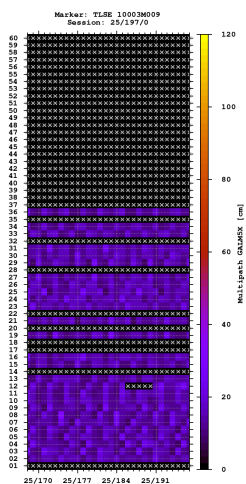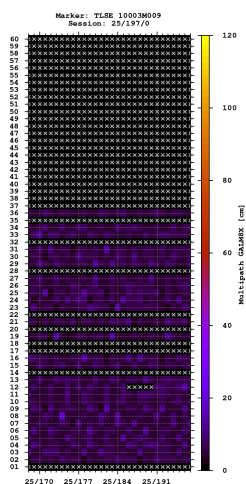


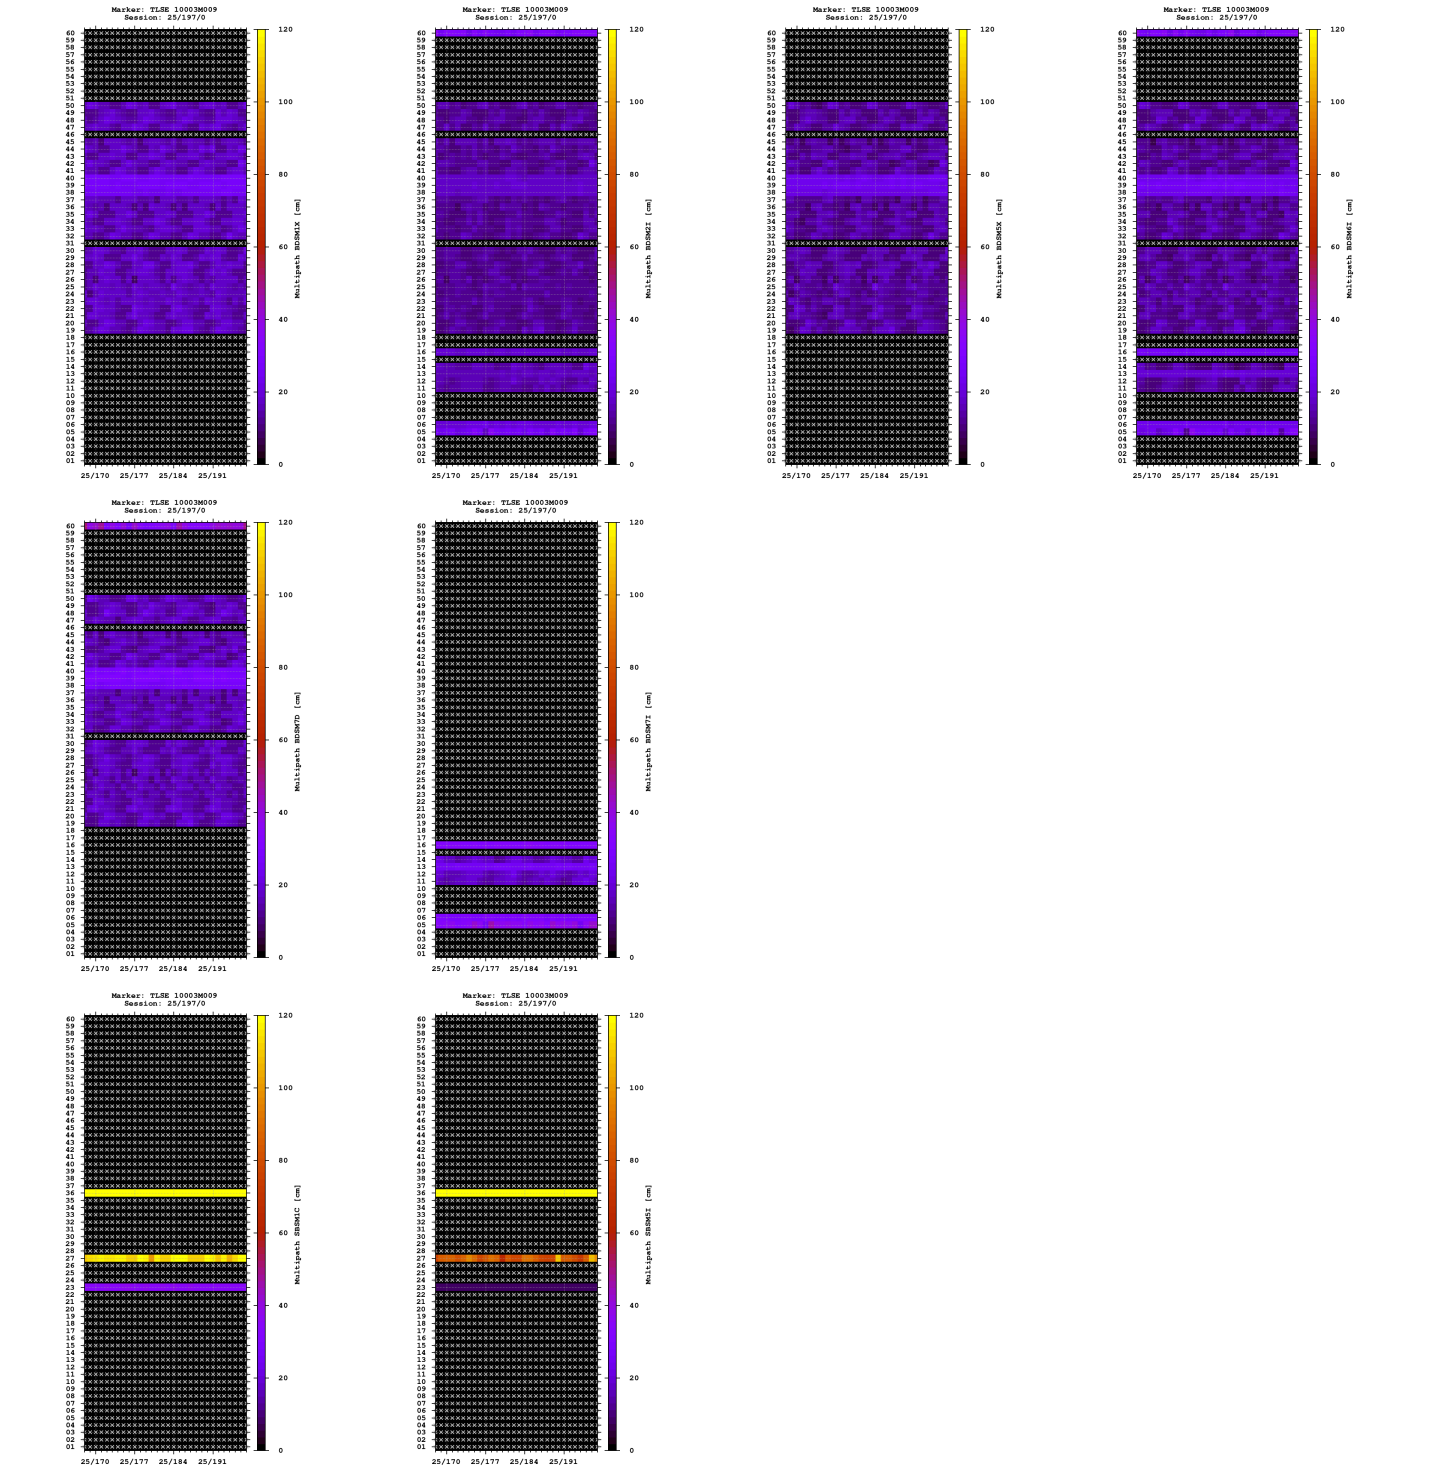



- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

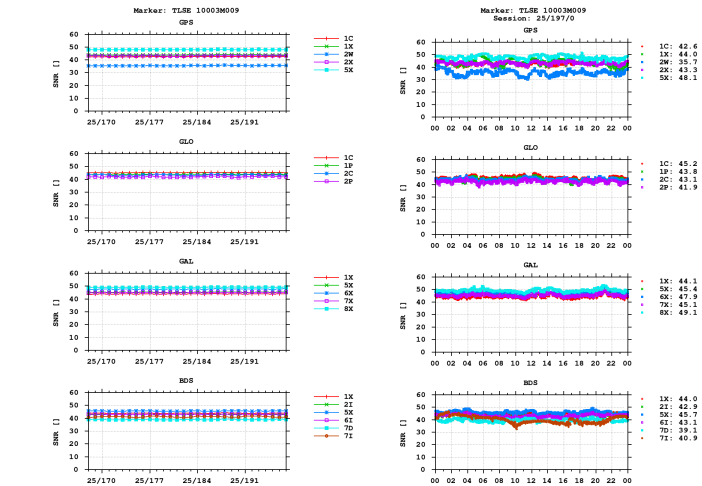

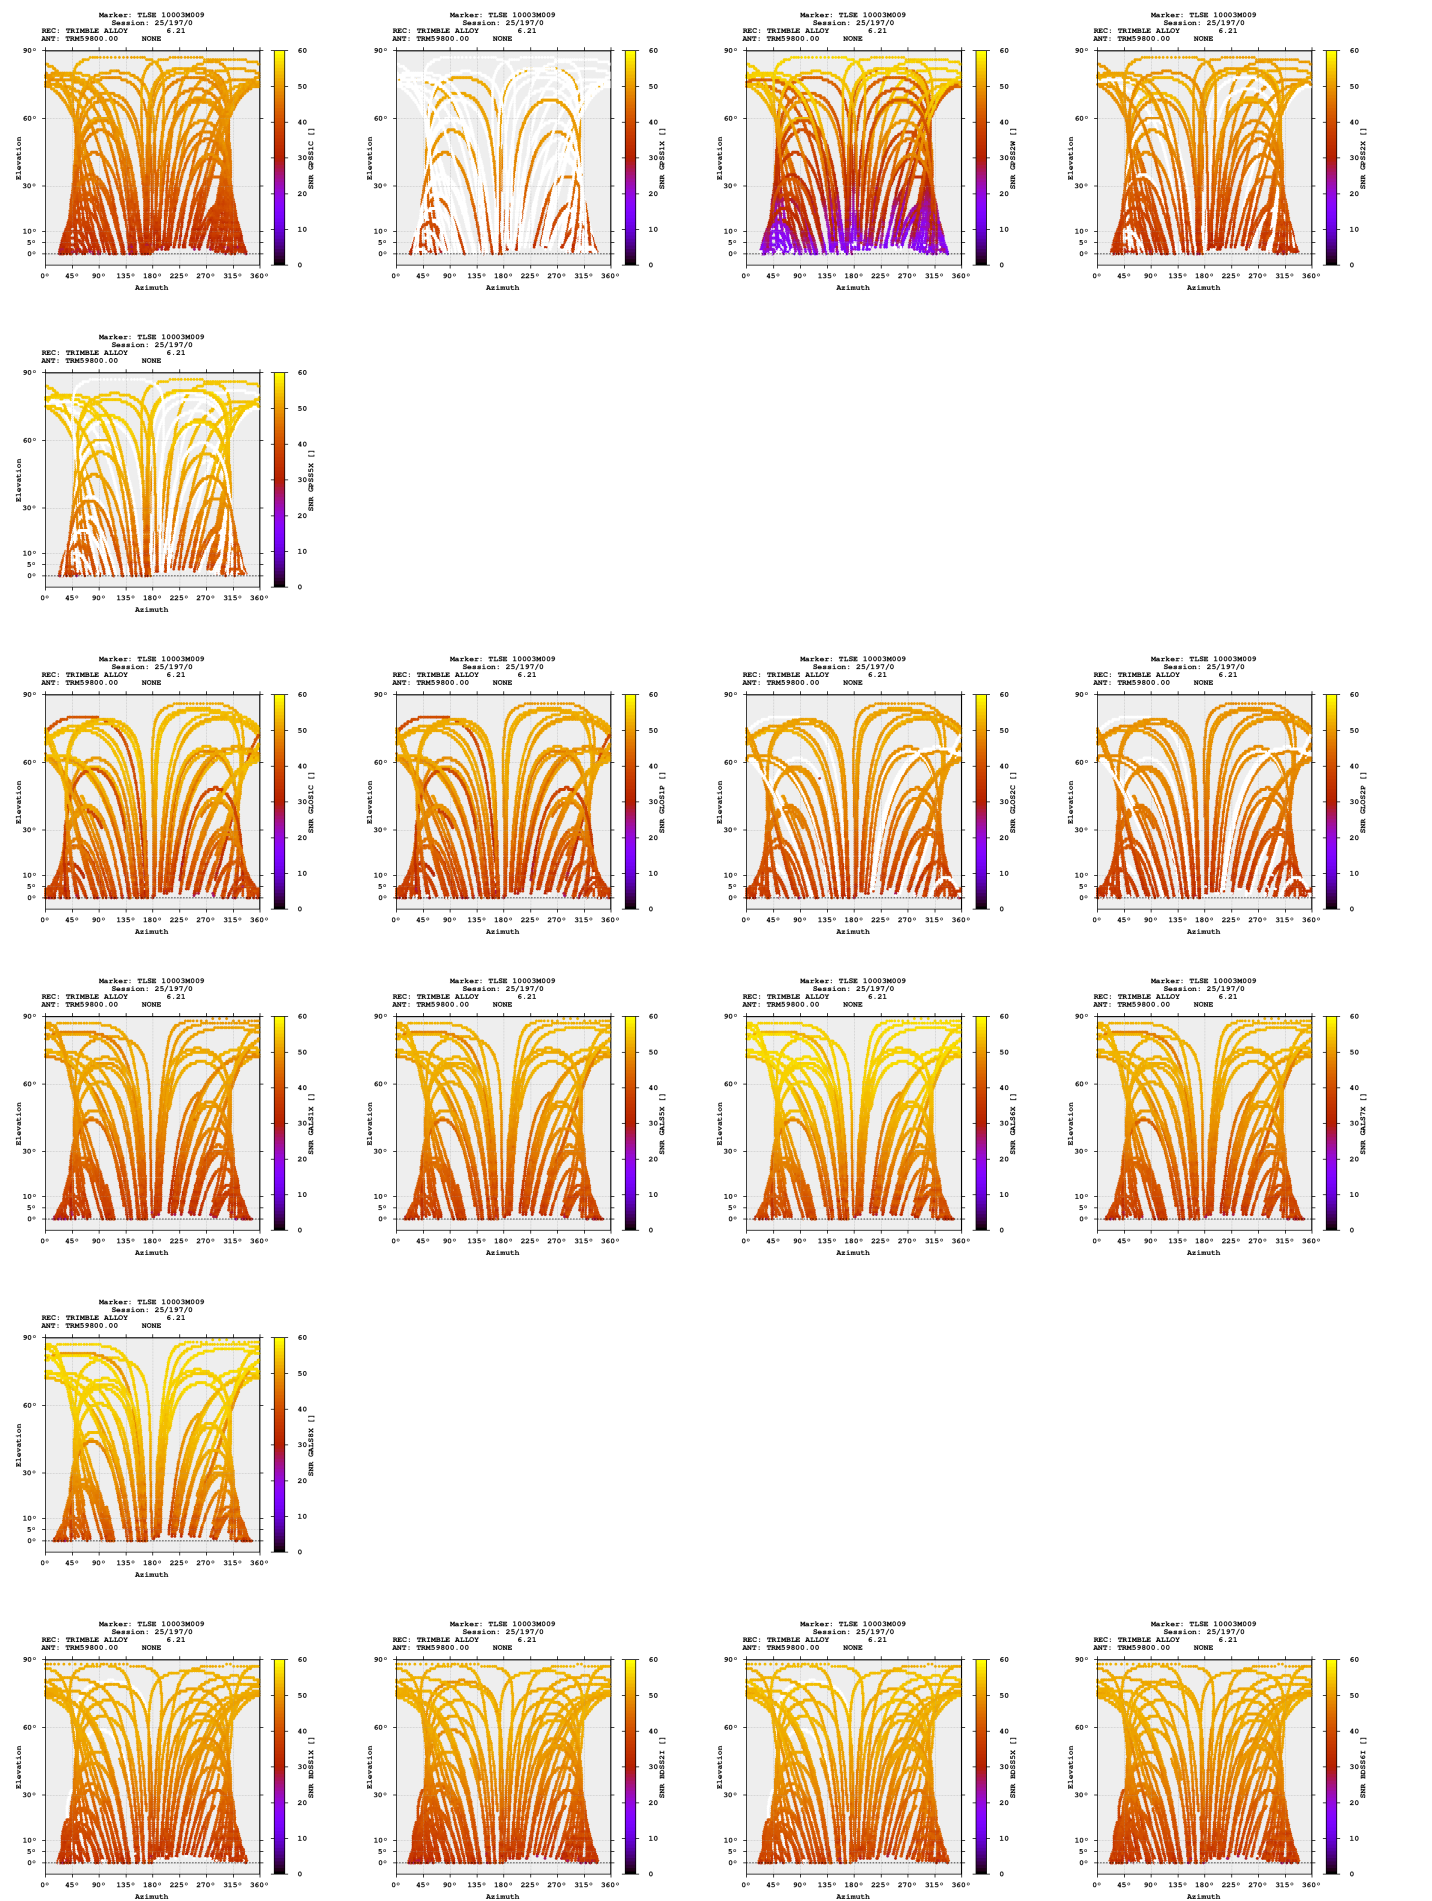

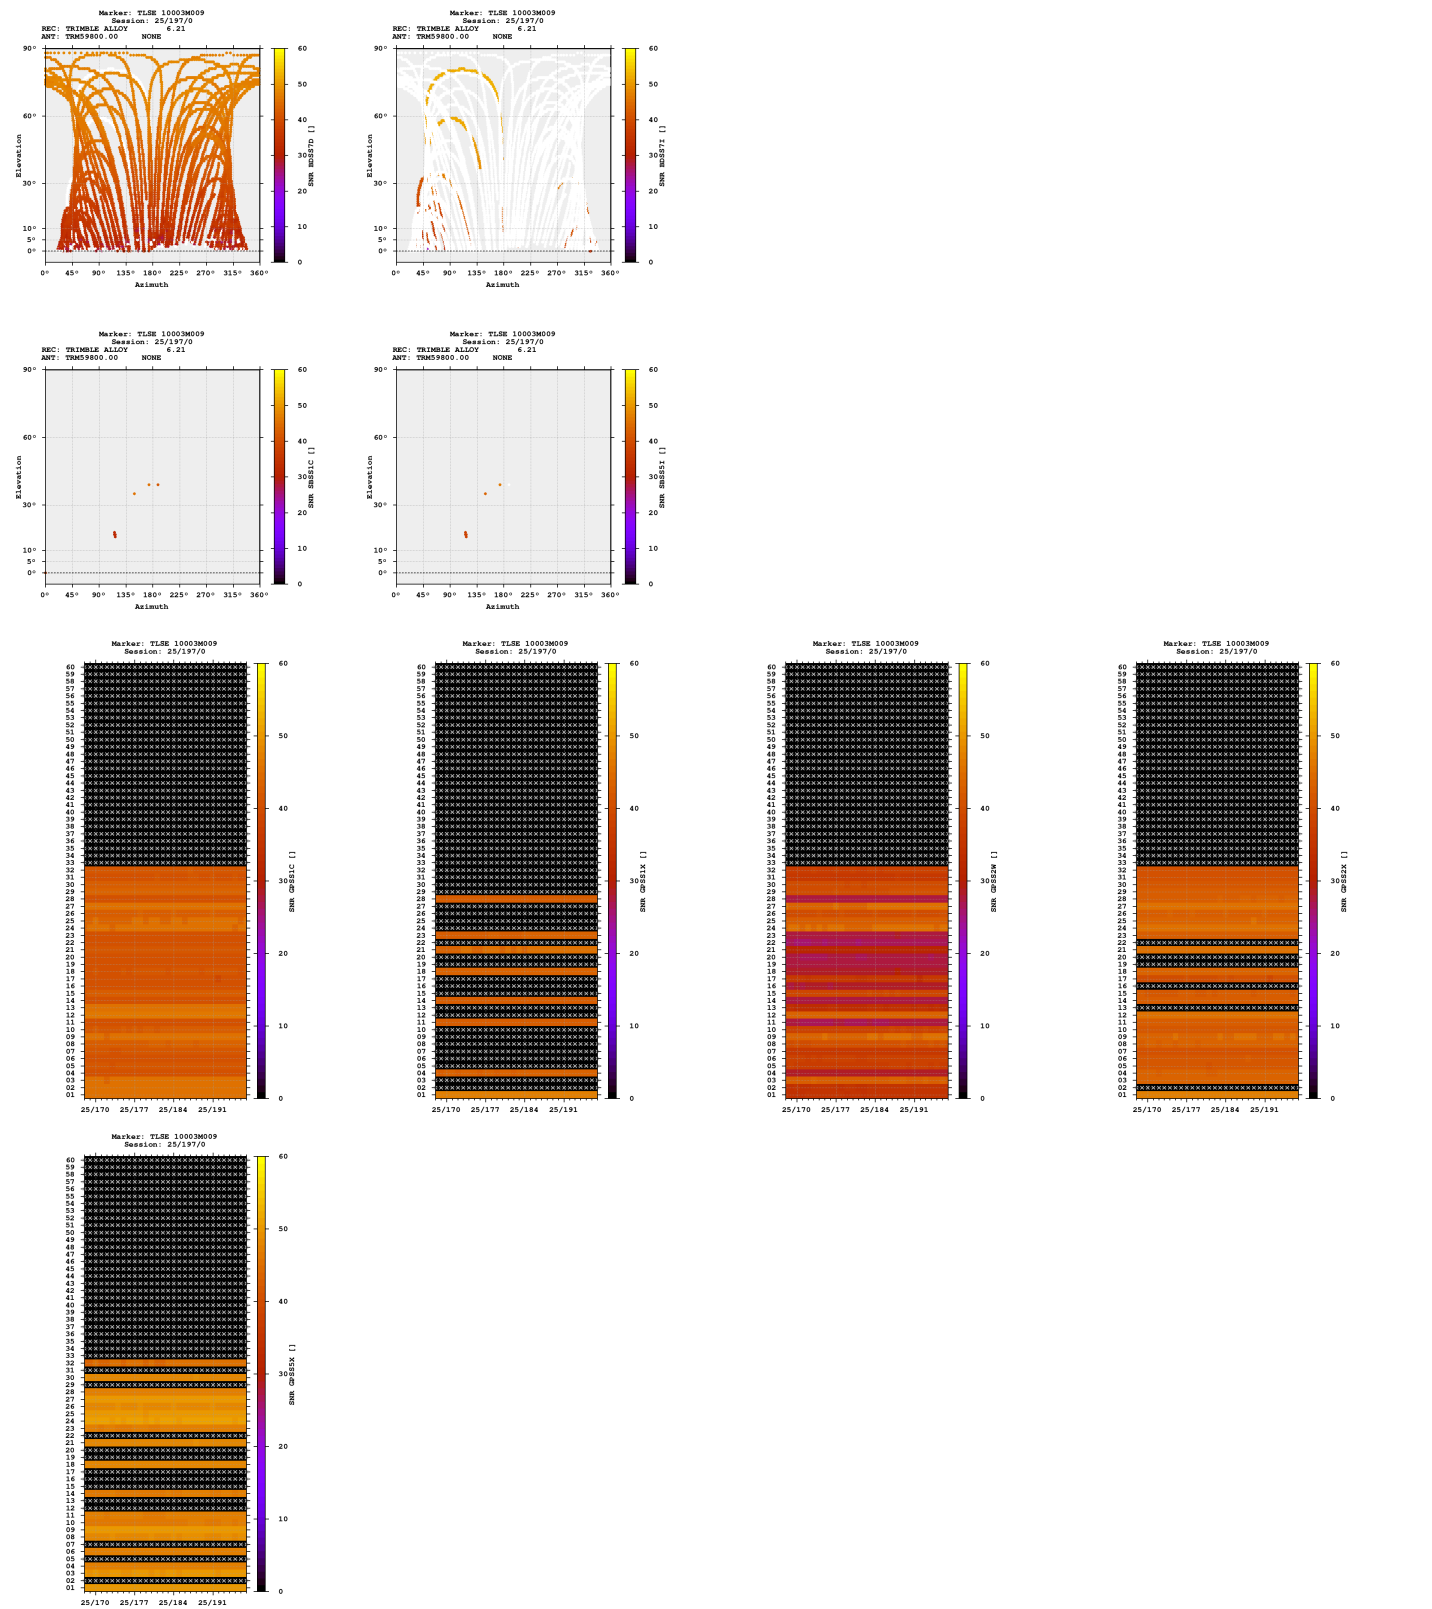


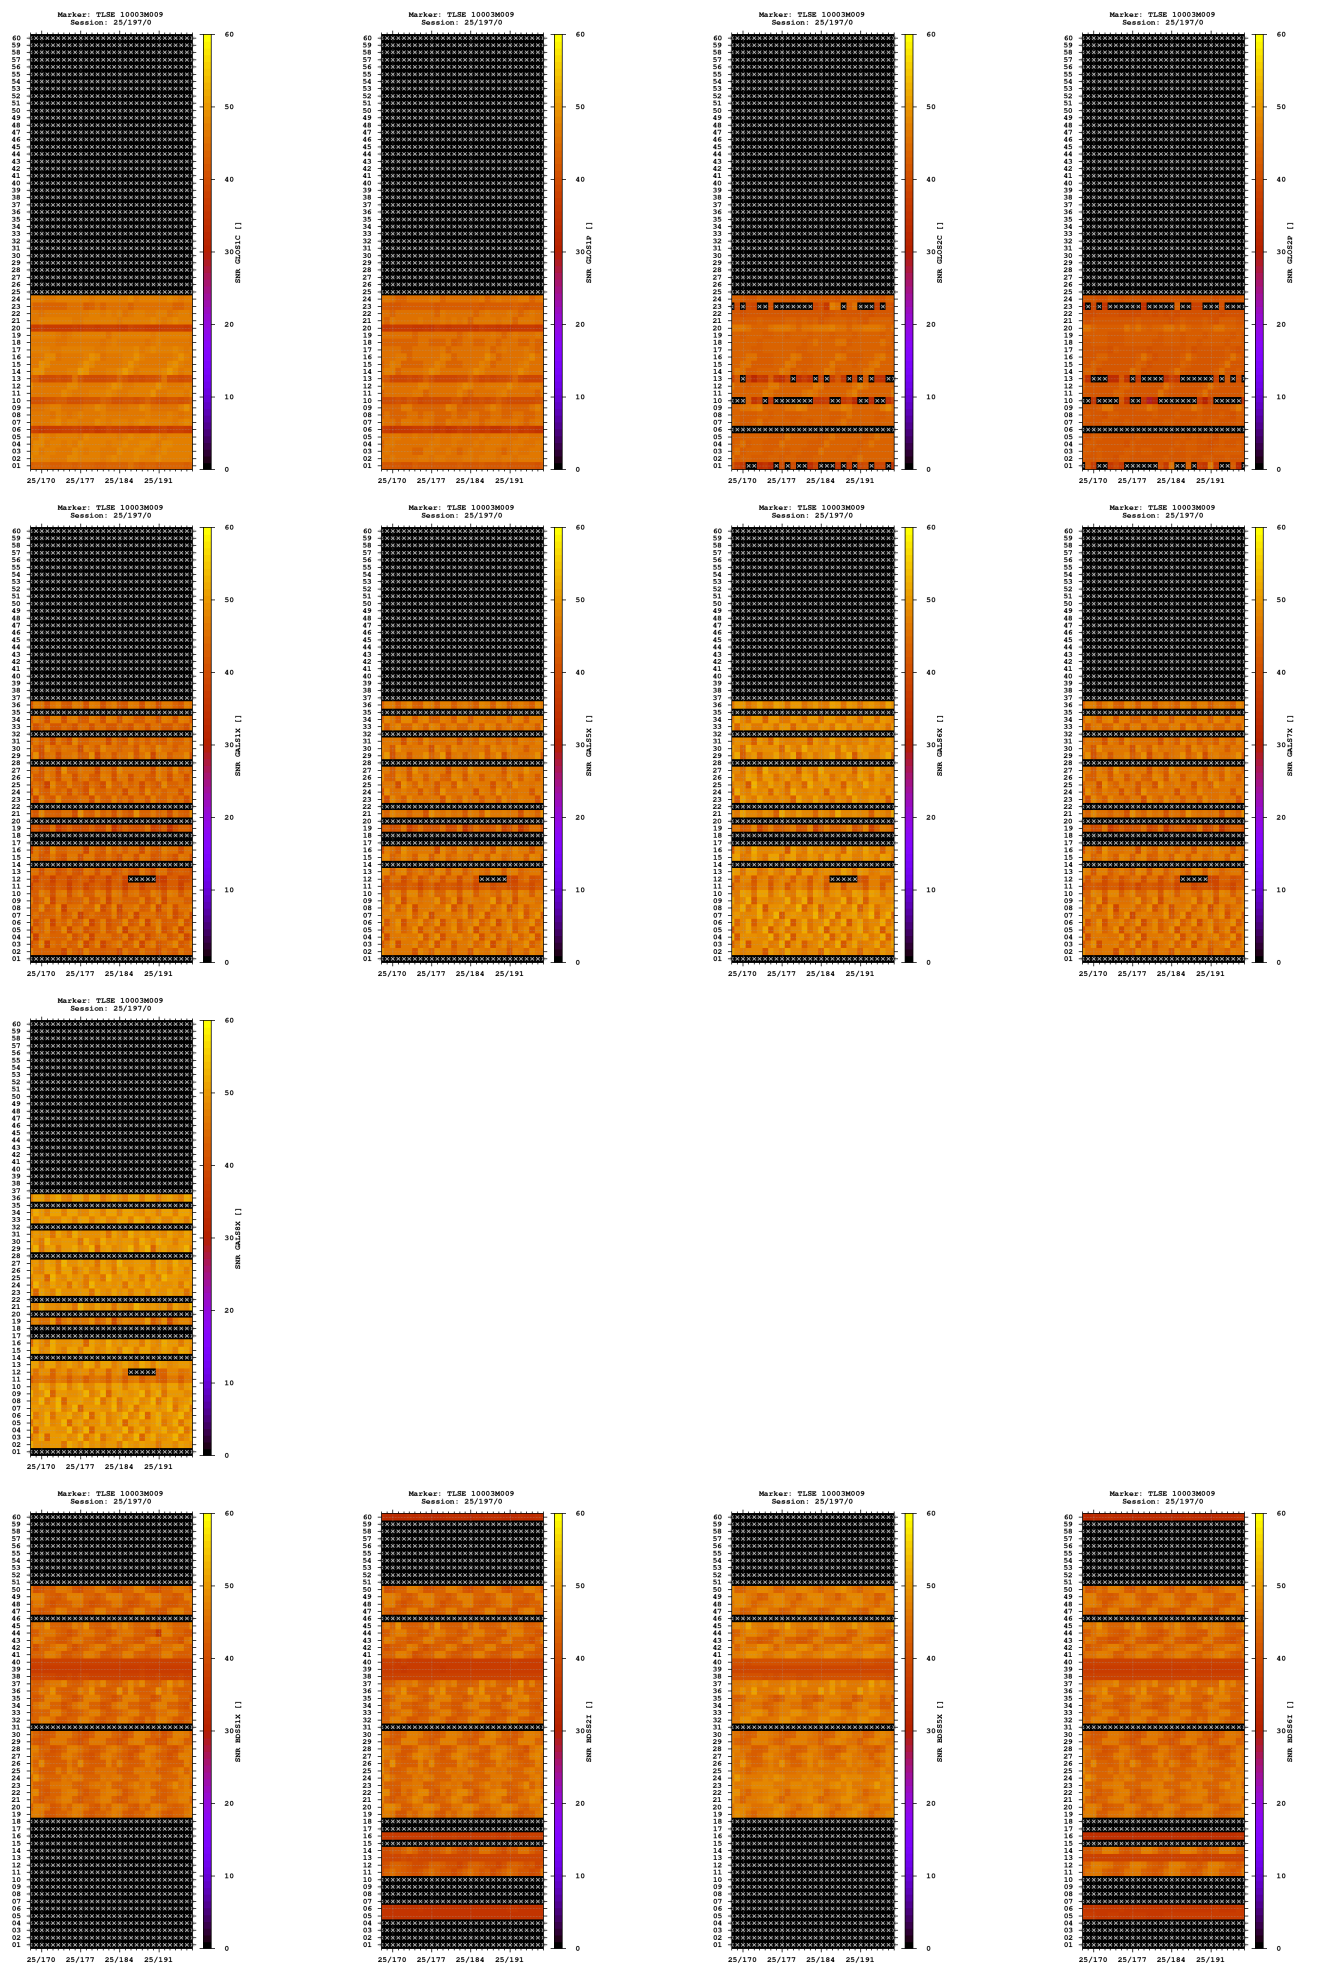


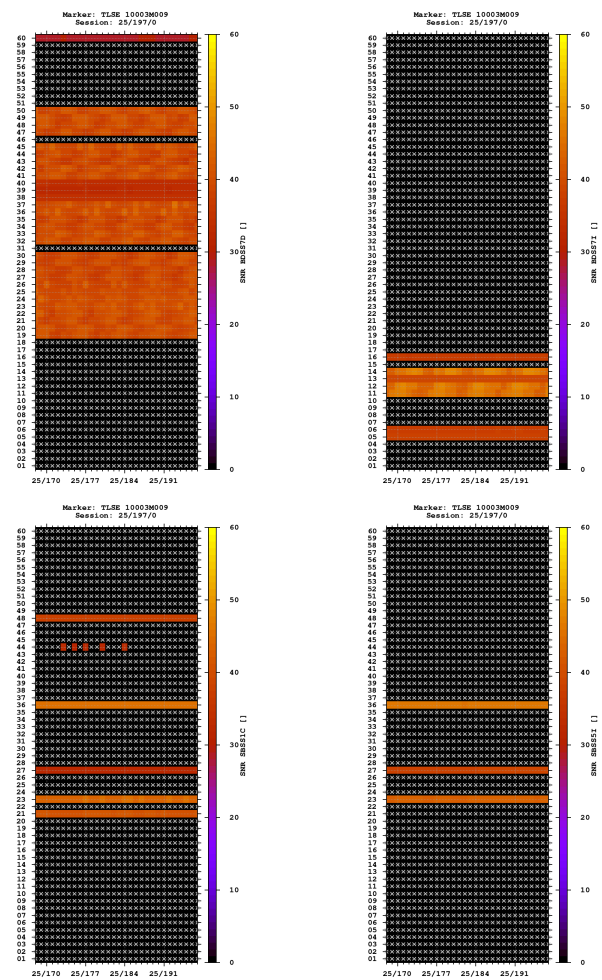

Estimates

2025-07-16 00:00:00	GPS	4627852.4696	119640.2828	4372994.5761	43.560697404	1.480893523	208.3615
2025-07-16 00:00:00	GLO	4627851.7909	119640.1456	4372992.2763	43.560684890	1.480891955	206.0127
2025-07-16 00:00:00	GAL	4627851.8749	119640.2461	4372994.0018	43.560697352	1.480893260	207.5343
2025-07-16 00:00:00	BDS	4627851.5425	119640.1445	4372994.3916	43.560701972	1.480892109	207.5602

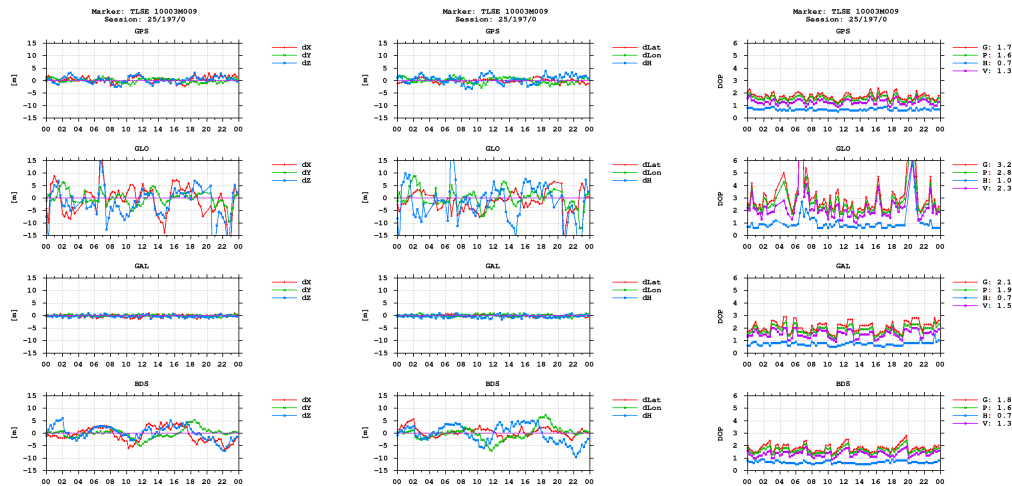

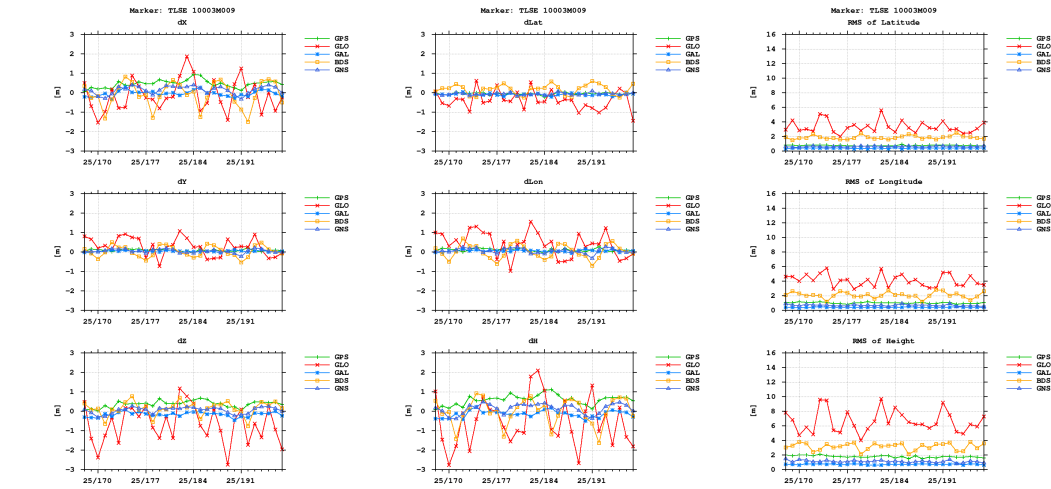

Equipment

2025-06-17 00:00:00 TRIMBLE ALLOY 6.21 6139R401 TRIMBLE AL

Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)