

GNSS observation file monitoring for WEIN

Last RINEX file: WEIN1970.25D.Z


RINEX version: 3.03

Marker: WEIN

Receiver: 6047R400 TRIMBLE ALLOY 6.21,27/JUN/2023

Antenna: 727326 LEIAR25.R4 LEIT


Epochs

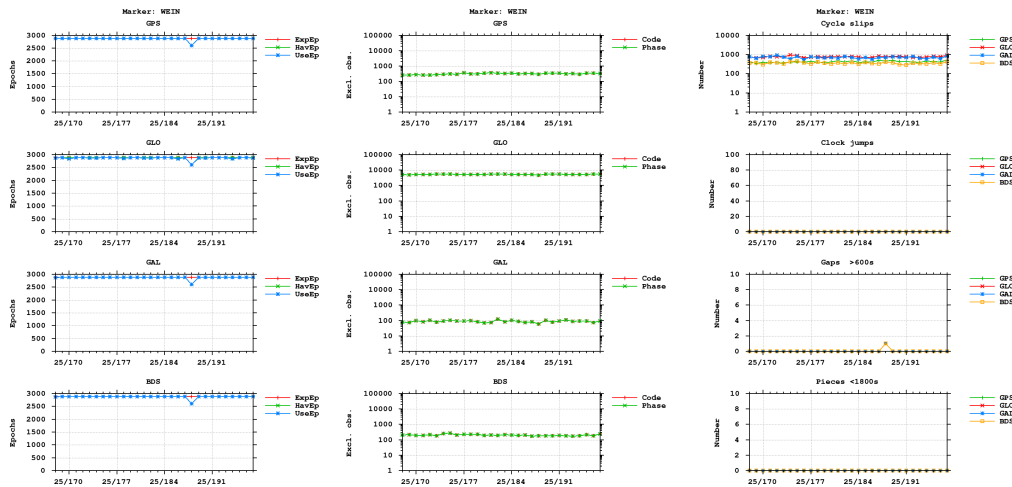


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

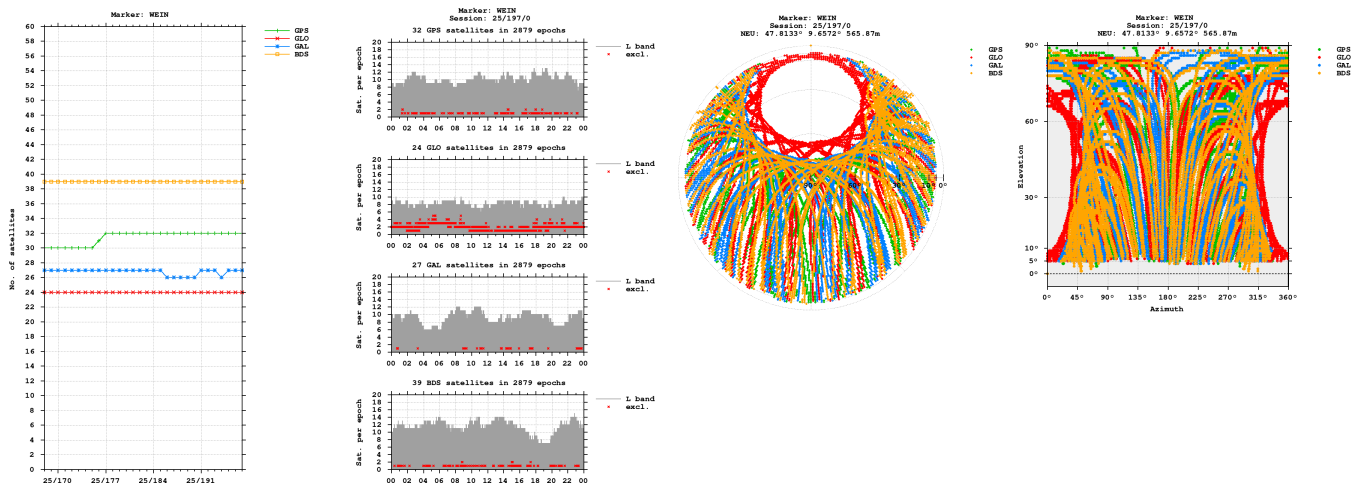


Bands

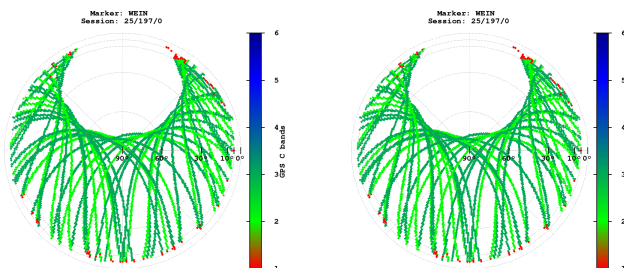

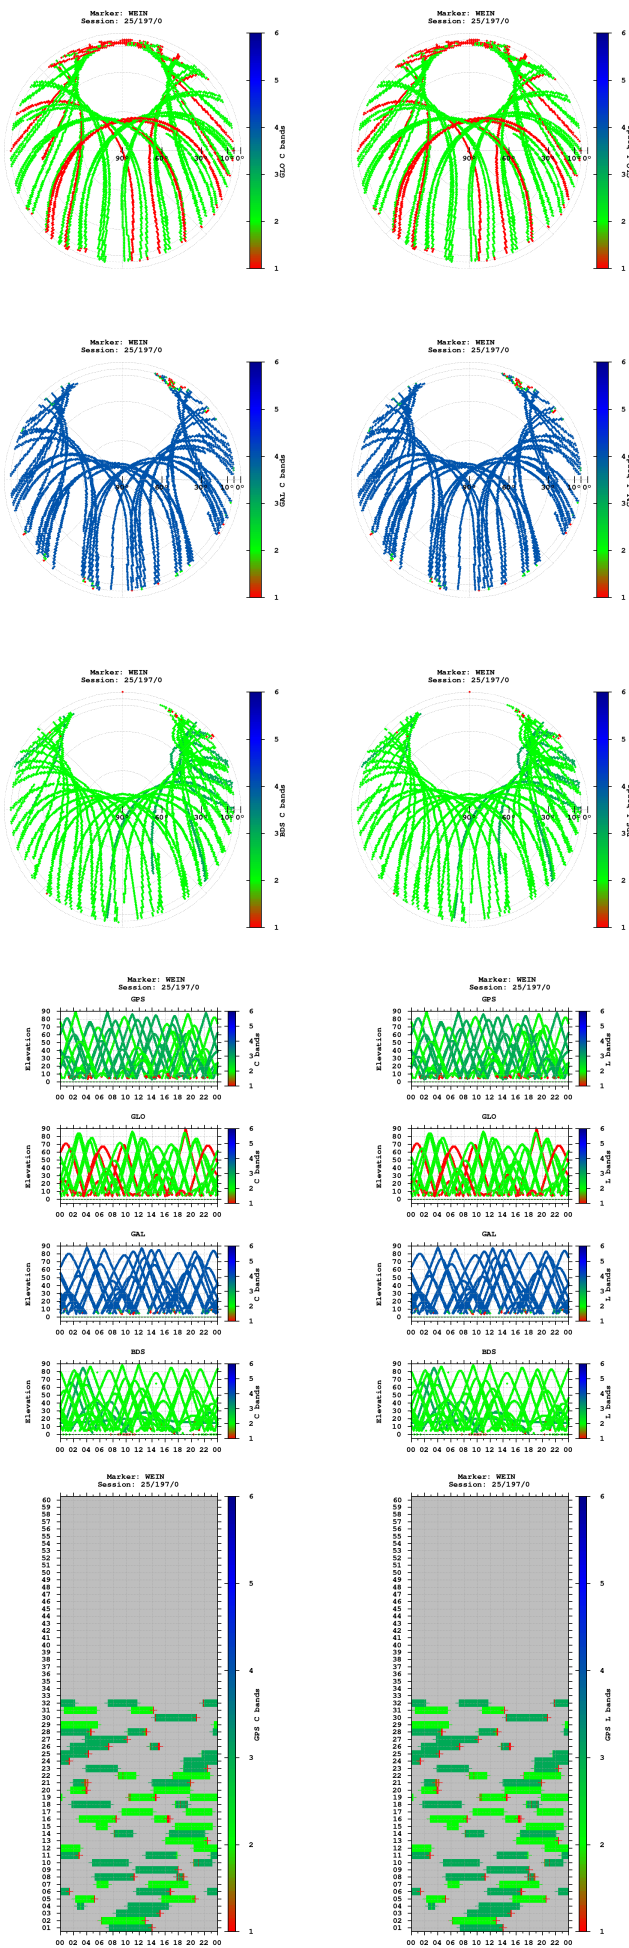


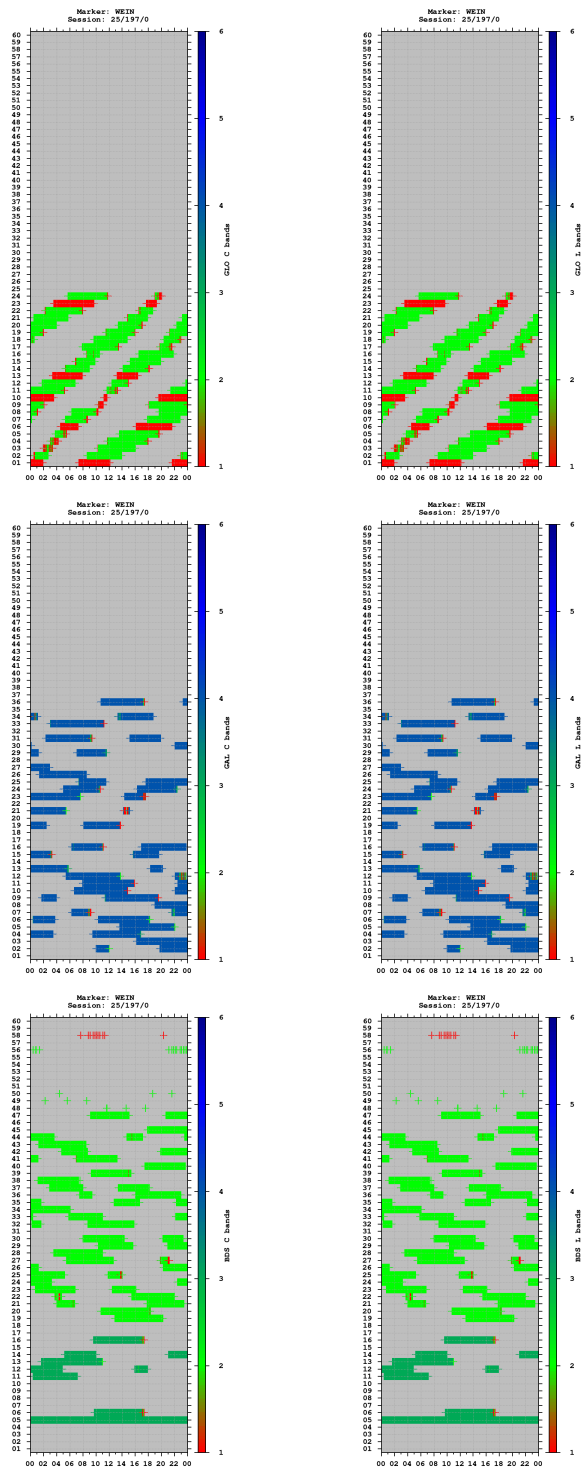


Observations

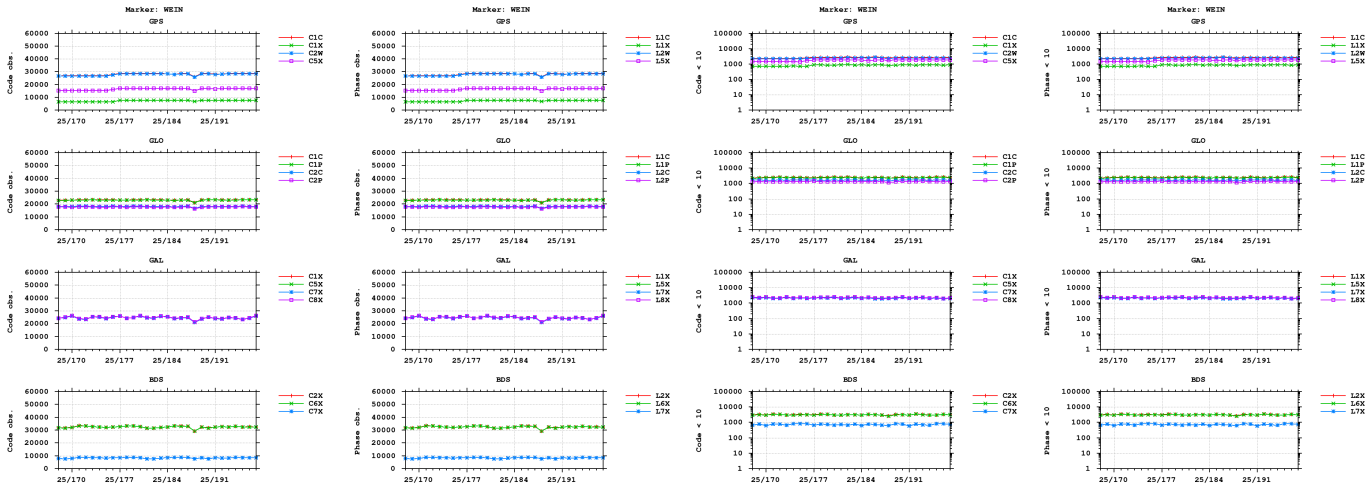


Cycle slips

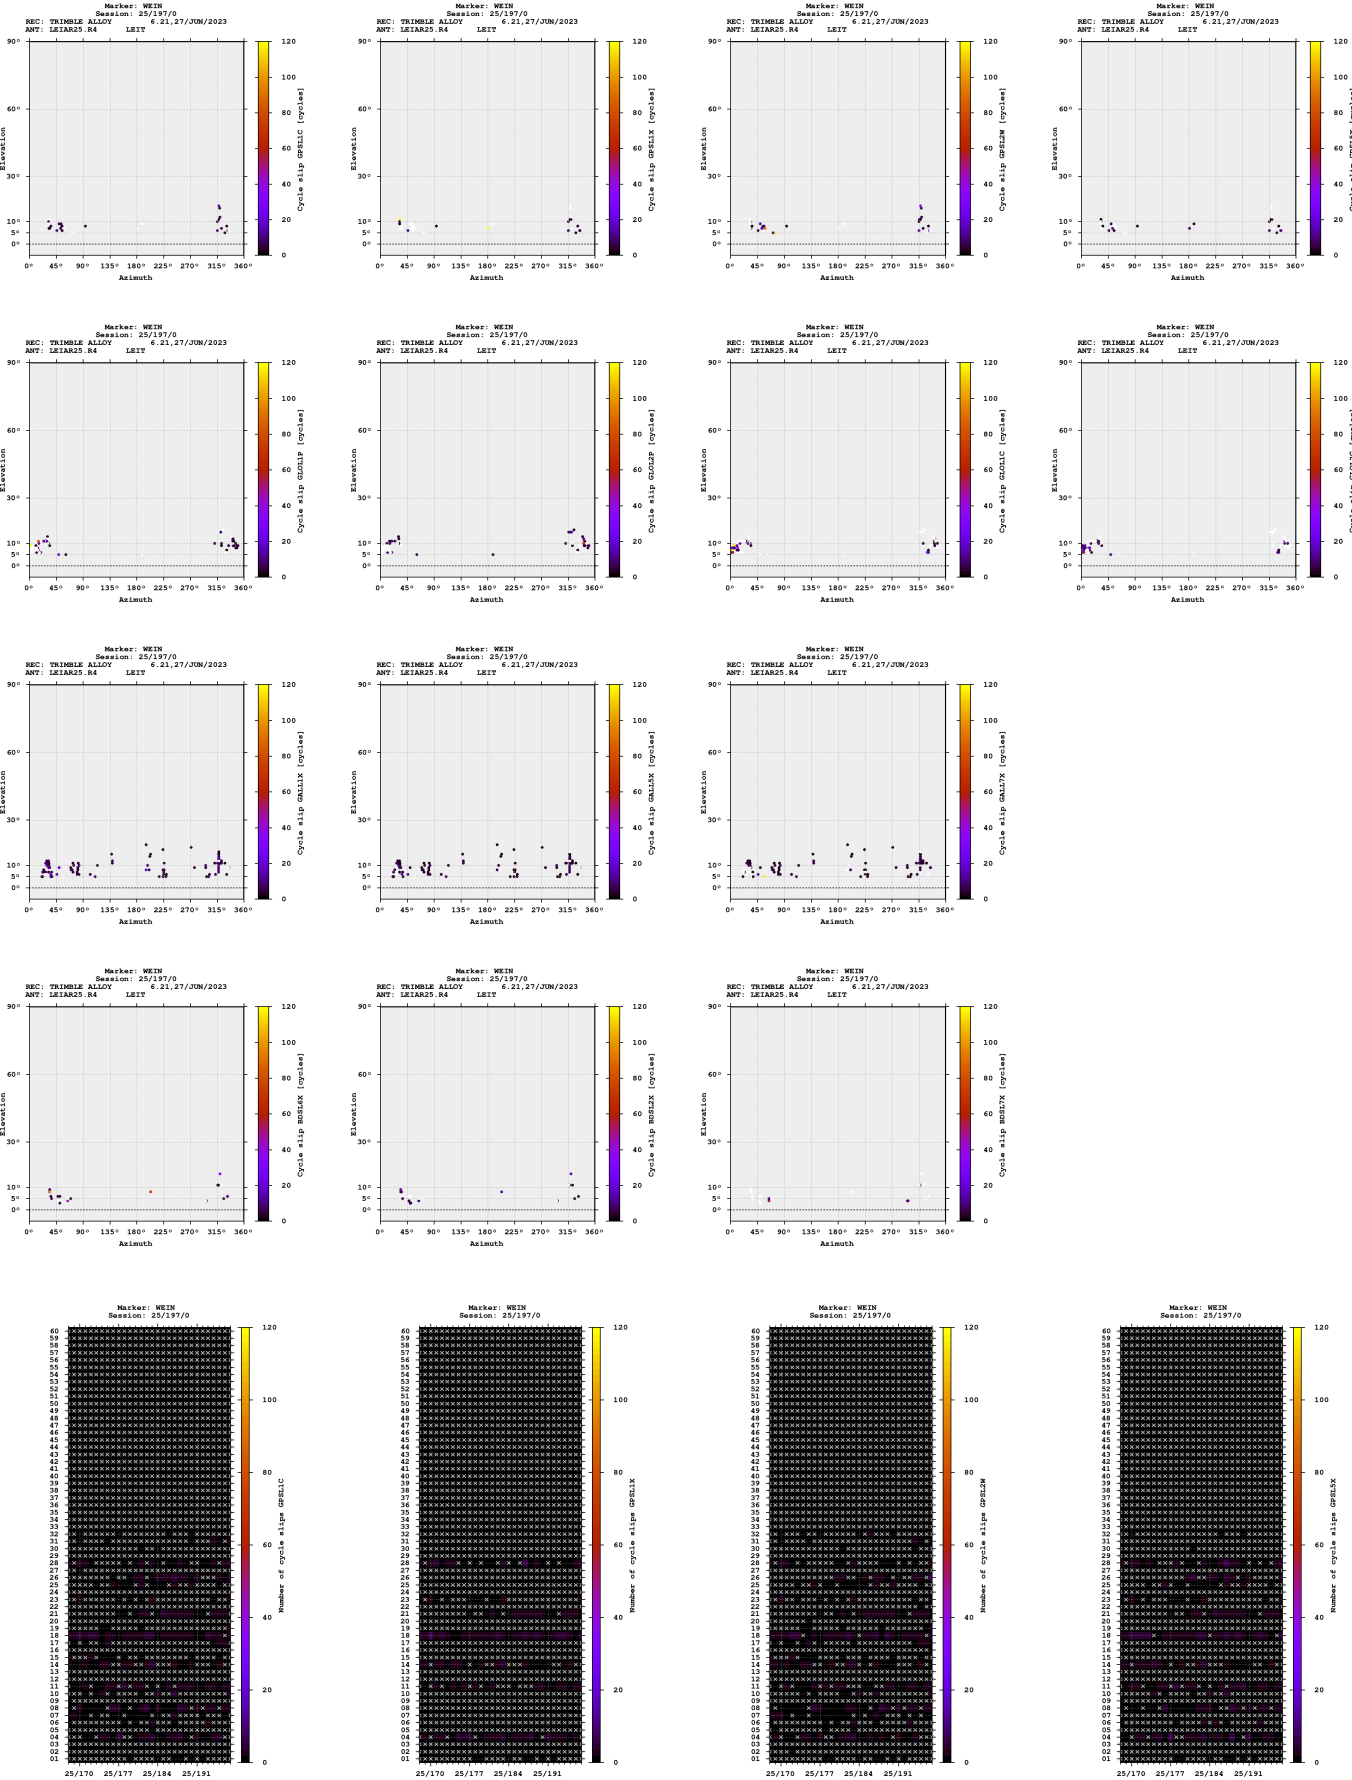


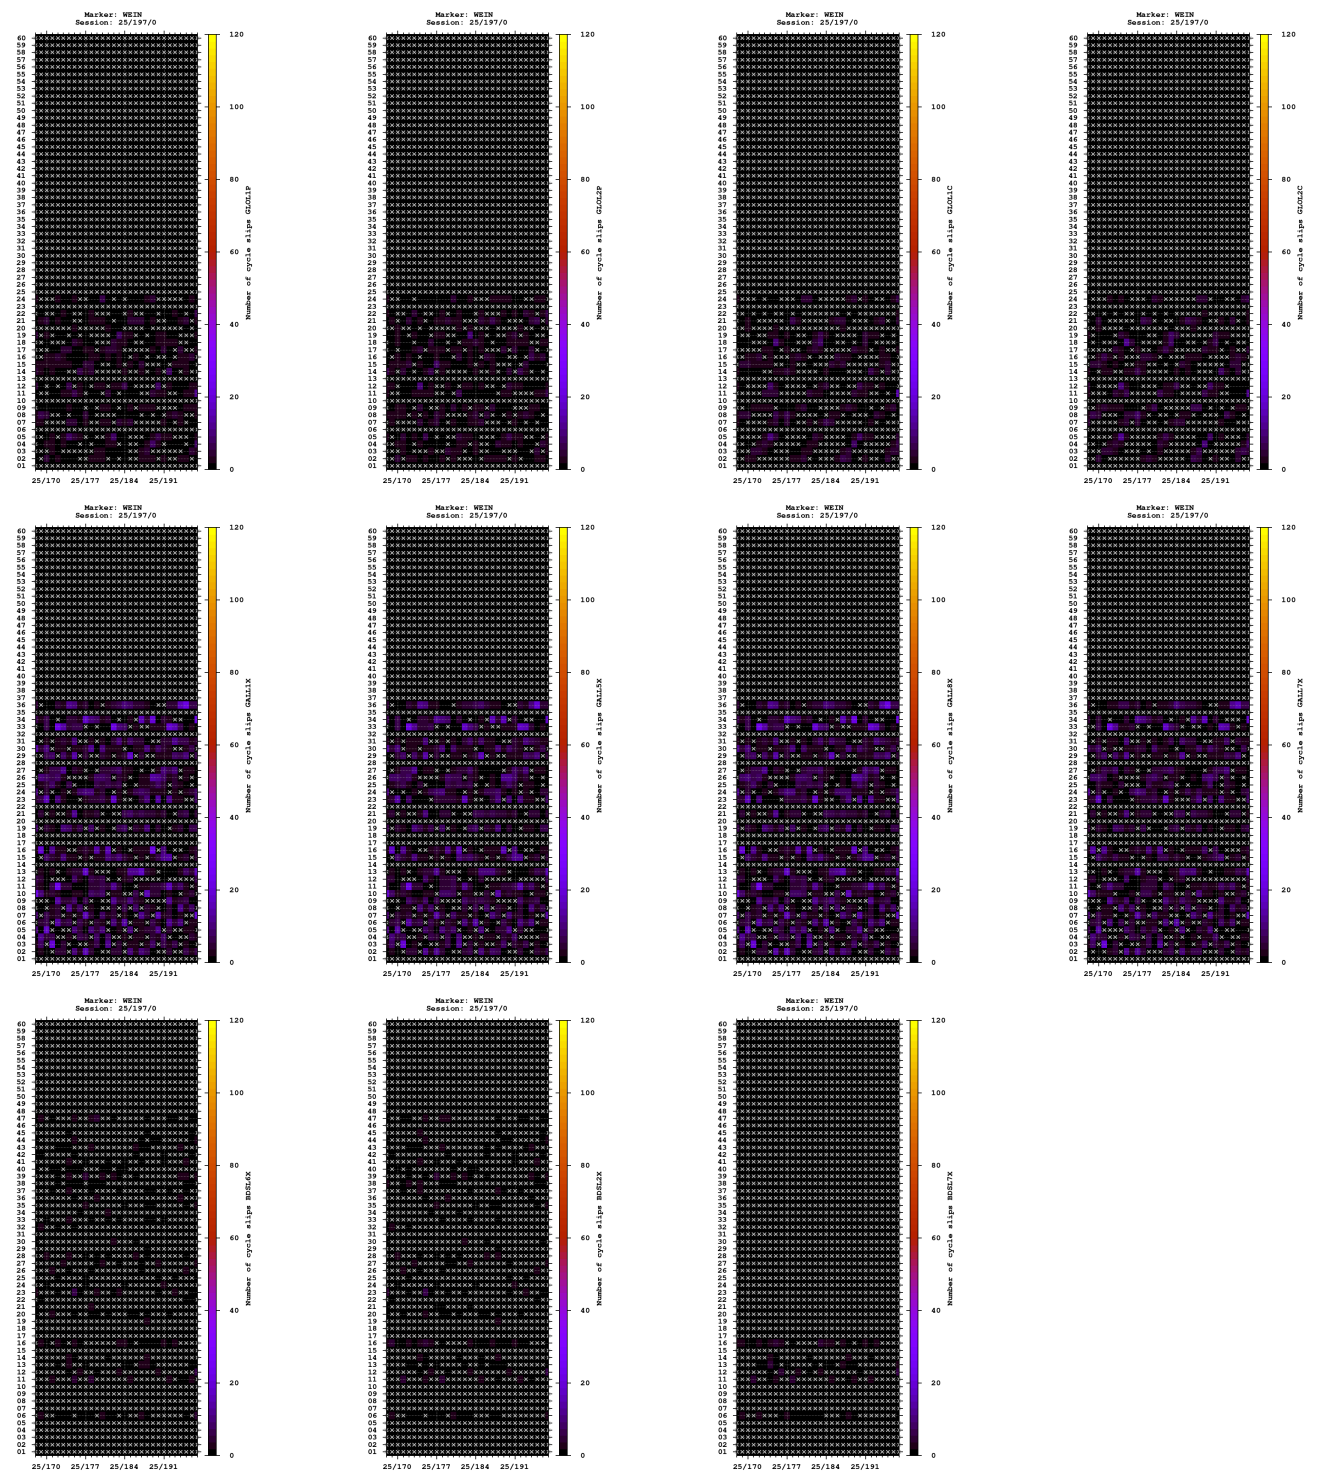

Multipath

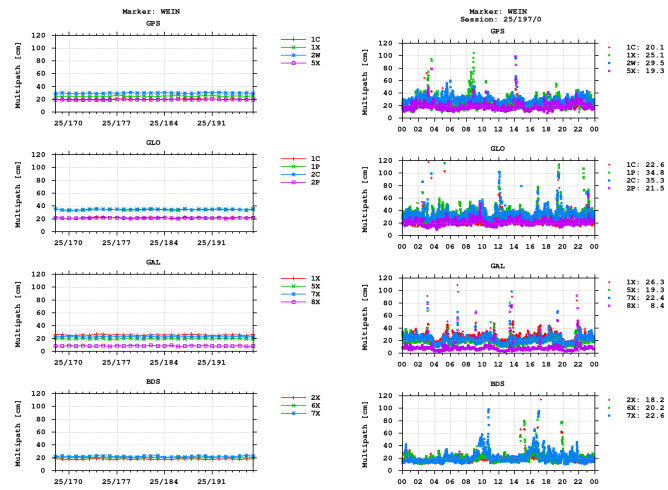




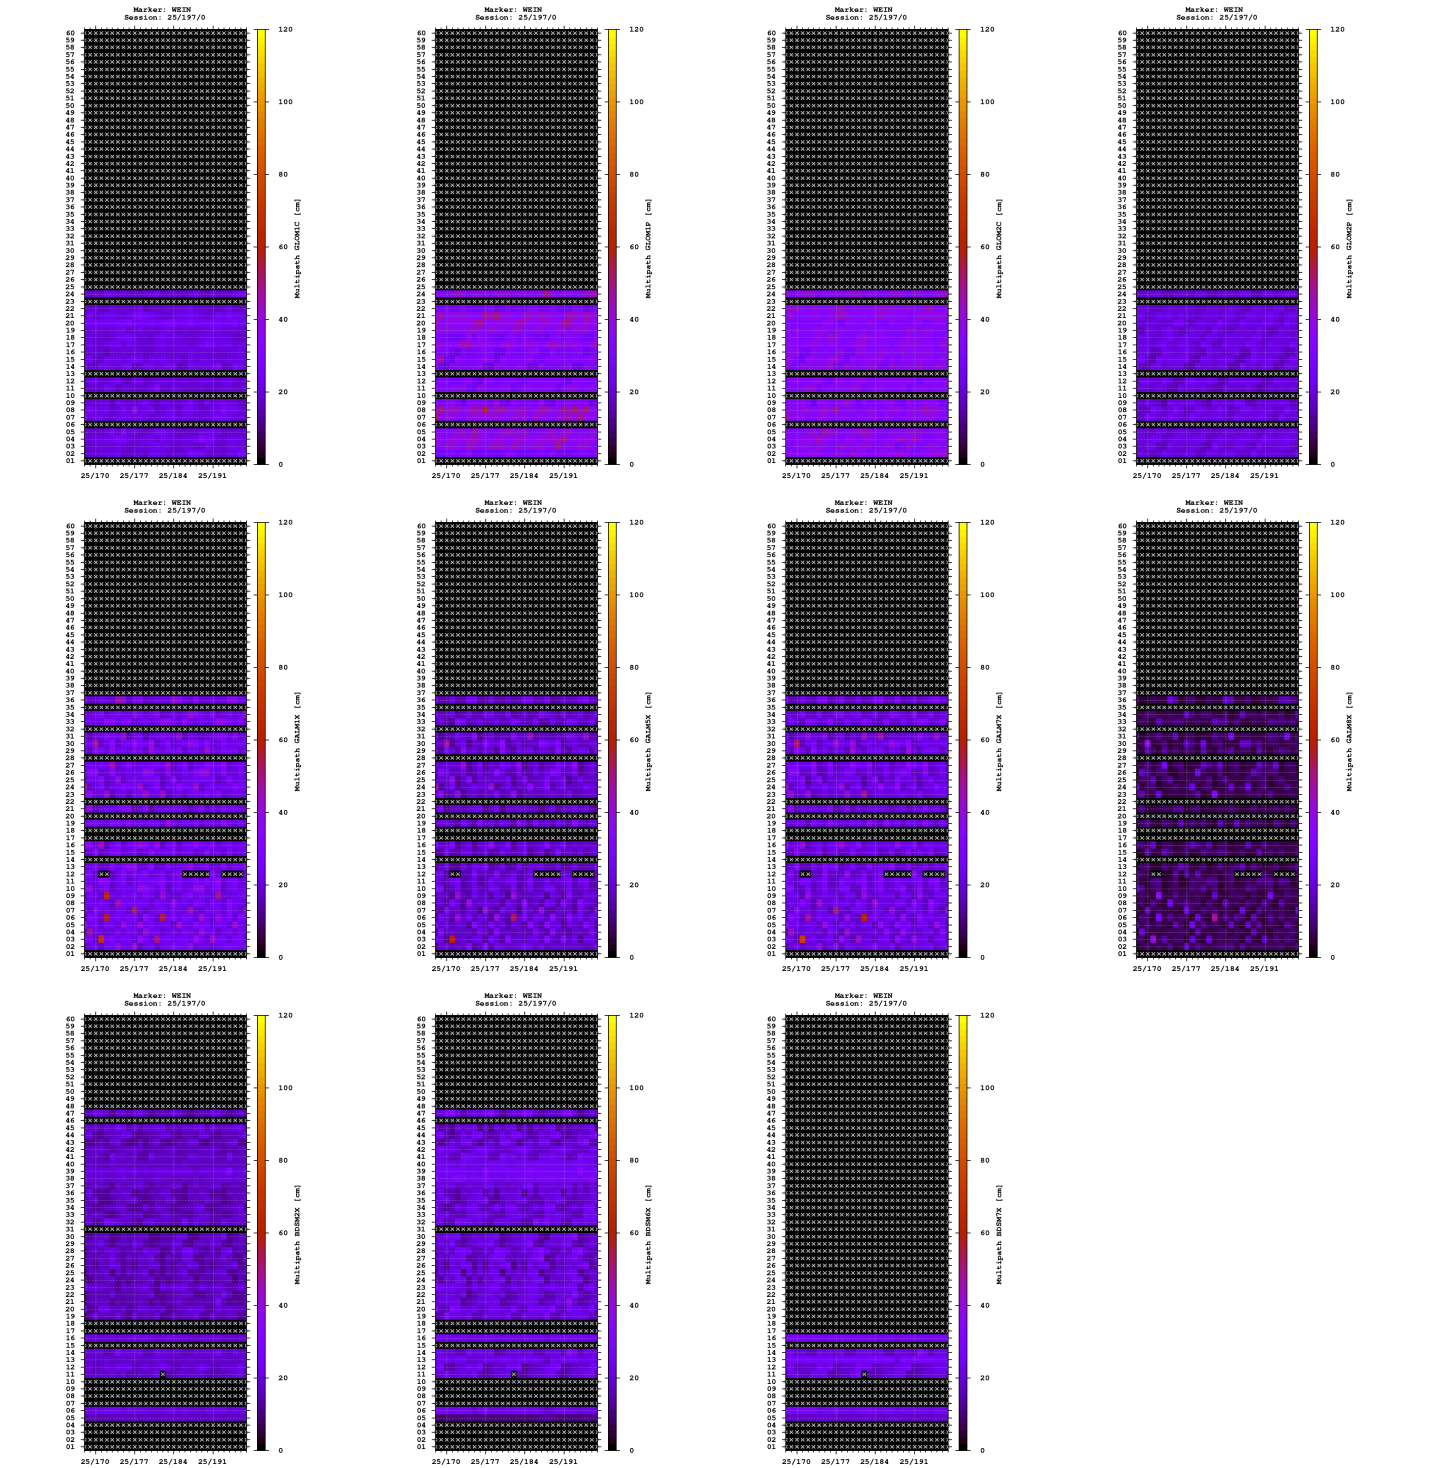


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

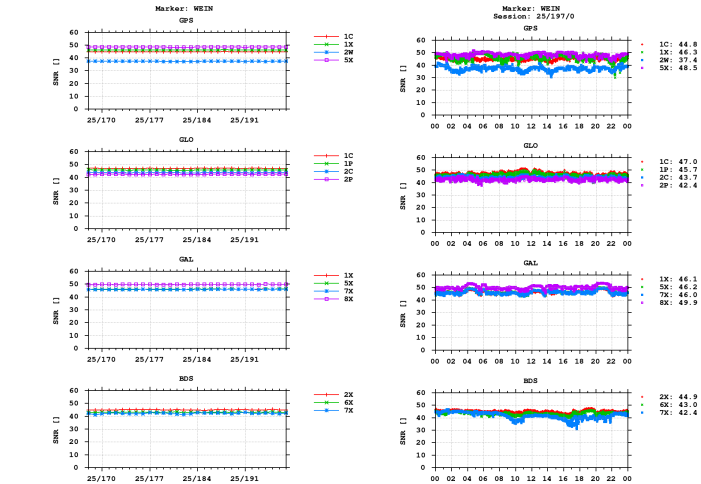




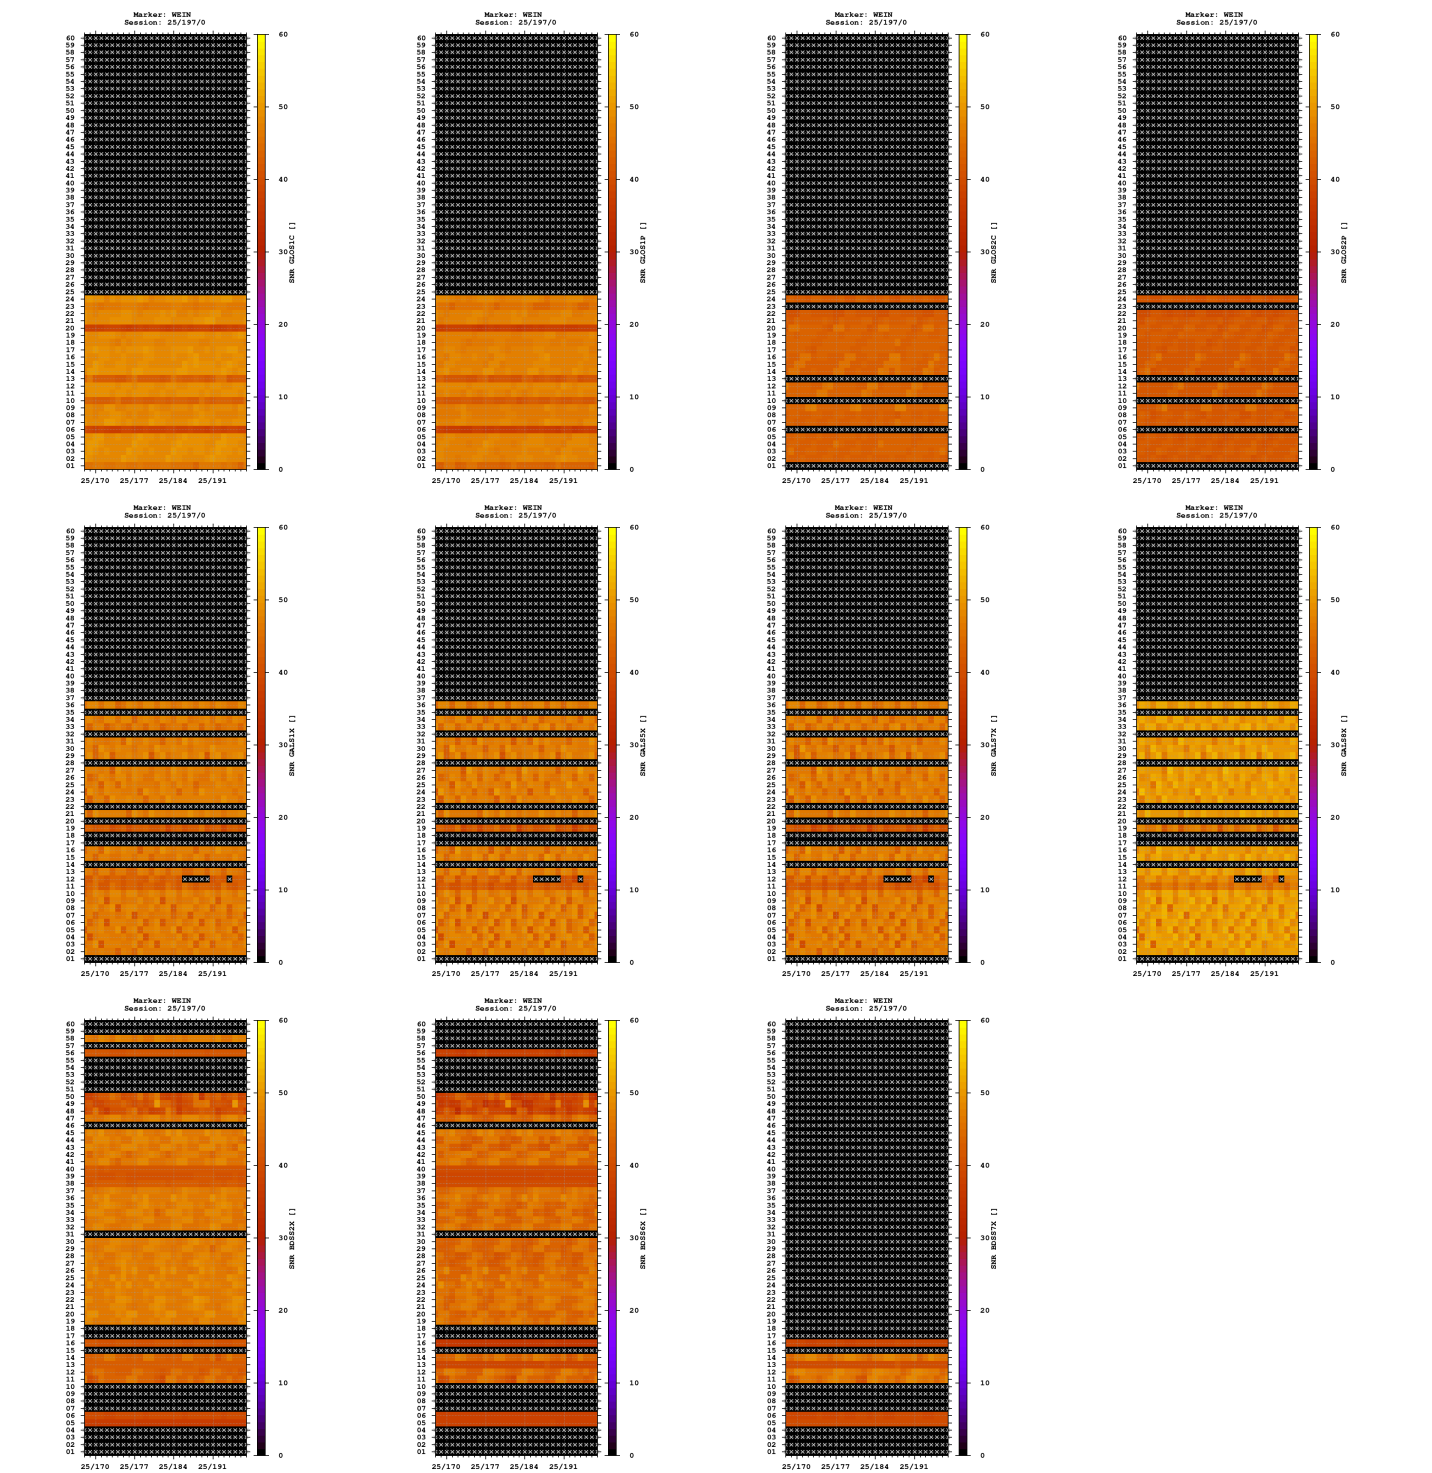

Estimates

2025-07-16 00:00:00	GPS	4230690.4581	719909.1536	4703378.4078	47.813273221	9.657150565	566.2900
2025-07-16 00:00:00	GLO	4230689.7524	719908.4292	4703376.2235	47.813265474	9.657142611	564.1227
2025-07-16 00:00:00	GAL	4230690.2272	719909.2167	4703378.2981	47.813274004	9.657151913	566.0630
2025-07-16 00:00:00	BDS	4230689.7175	719909.0013	4703378.4372	47.813278434	9.657150218	565.8044

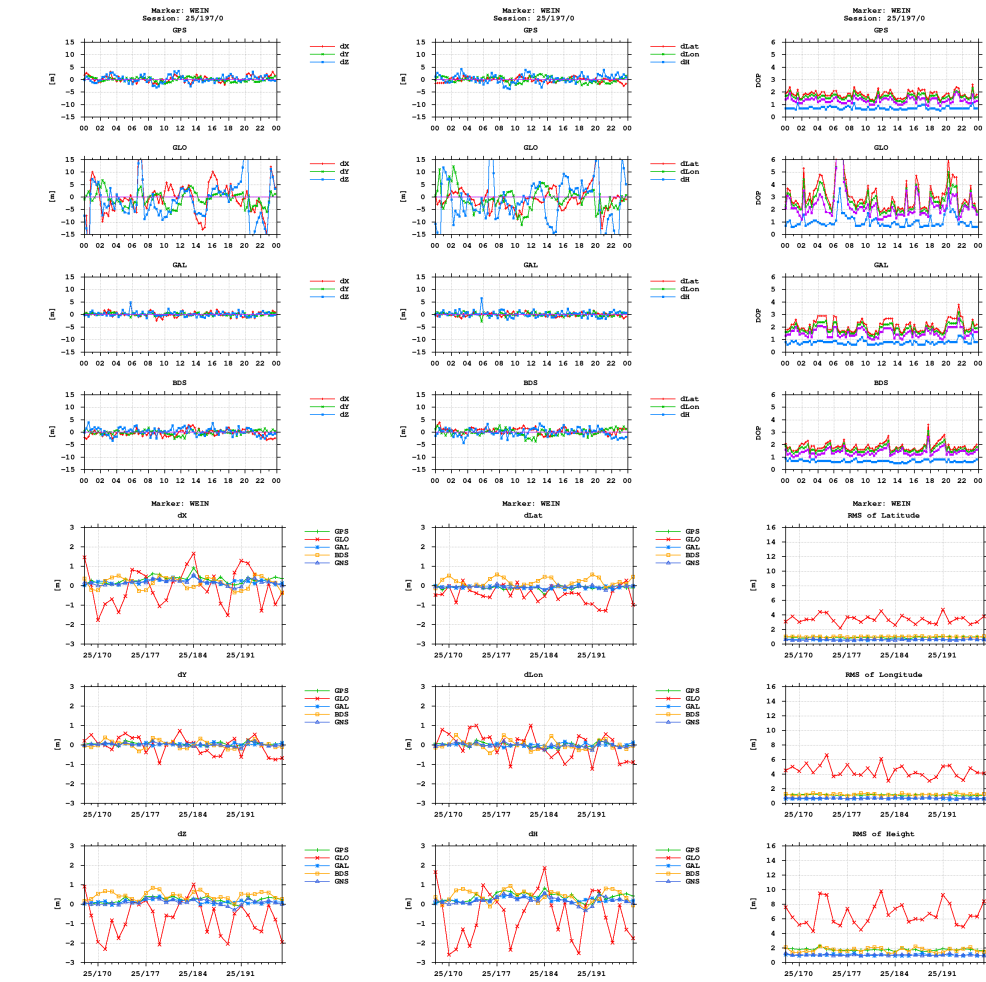

Equipment

2025-06-17 00:00:00 TRIMBLE ALLOY 6.21,27/JUN/2023 6047R400 TRIMBLE AL

Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)