


GNSS observation file monitoring for 0518


Last RINEX file: 05182221.220
RINEX version: 3.02
Marker: 1216
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

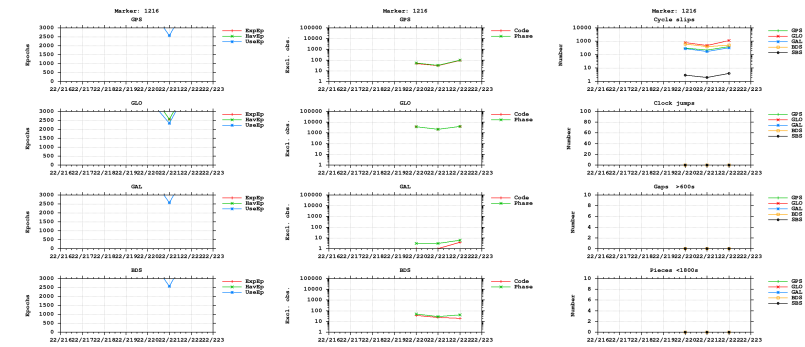



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

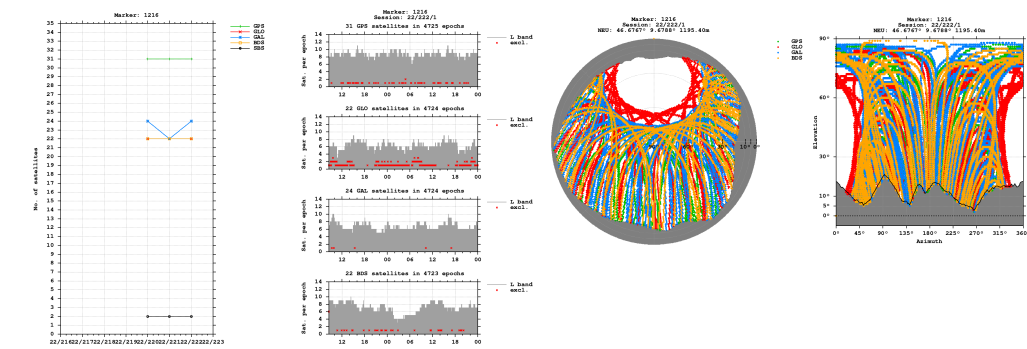


Bands

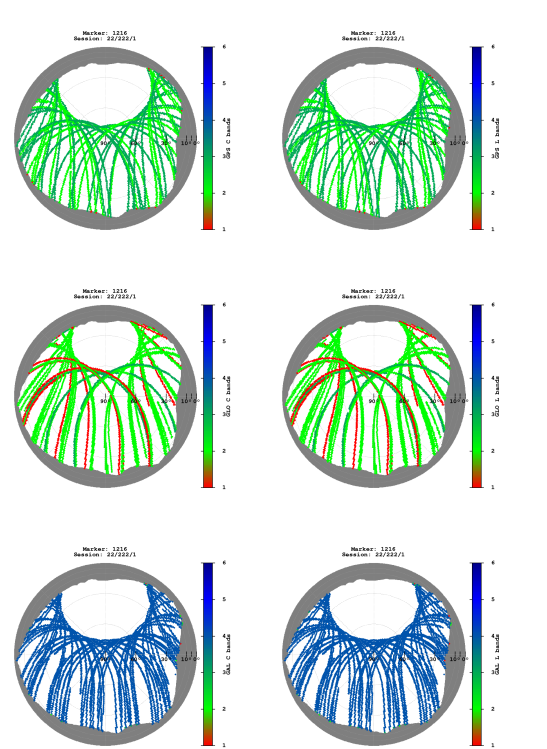


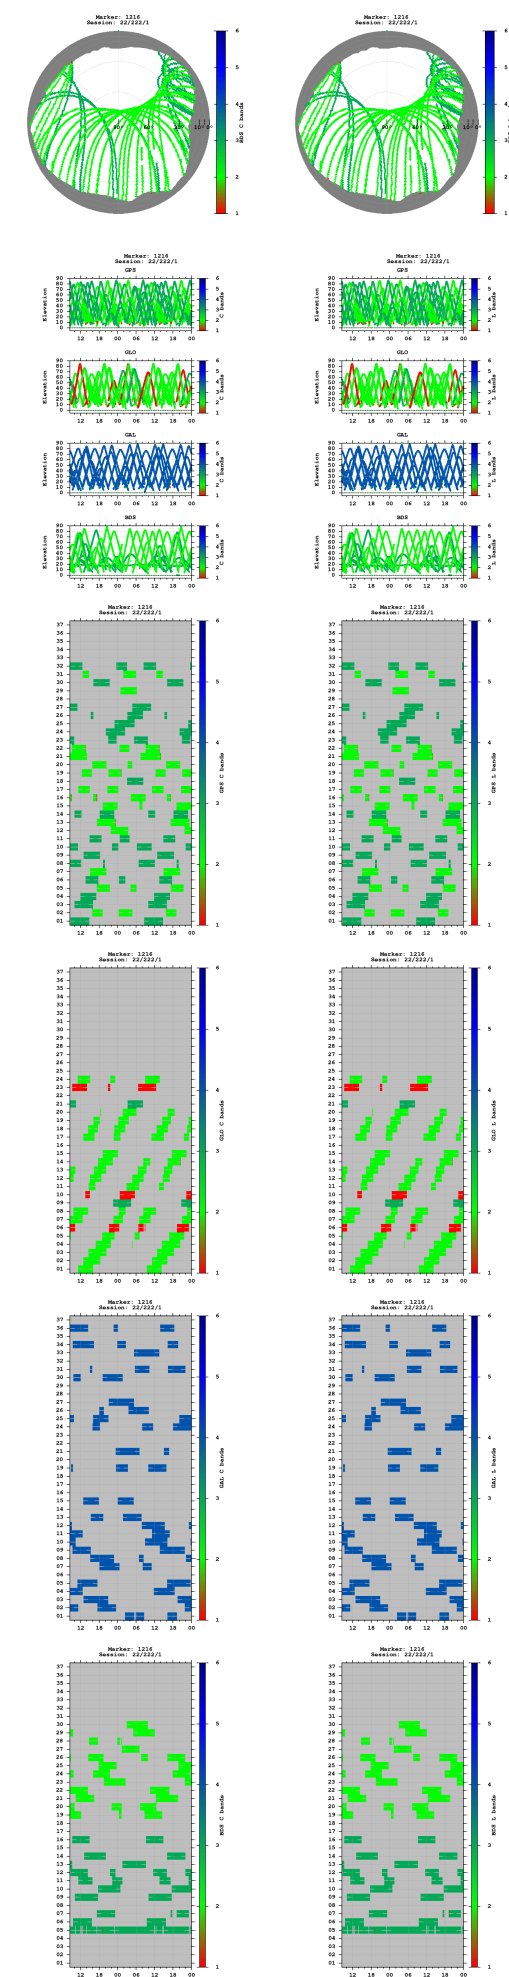



Observations

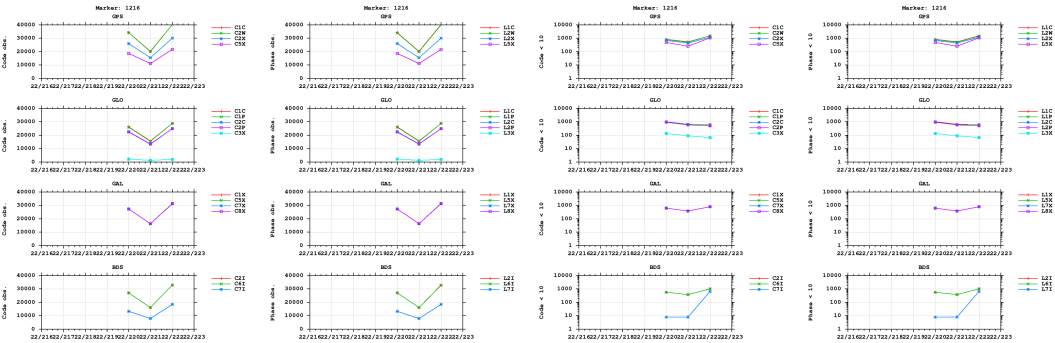


Multipath

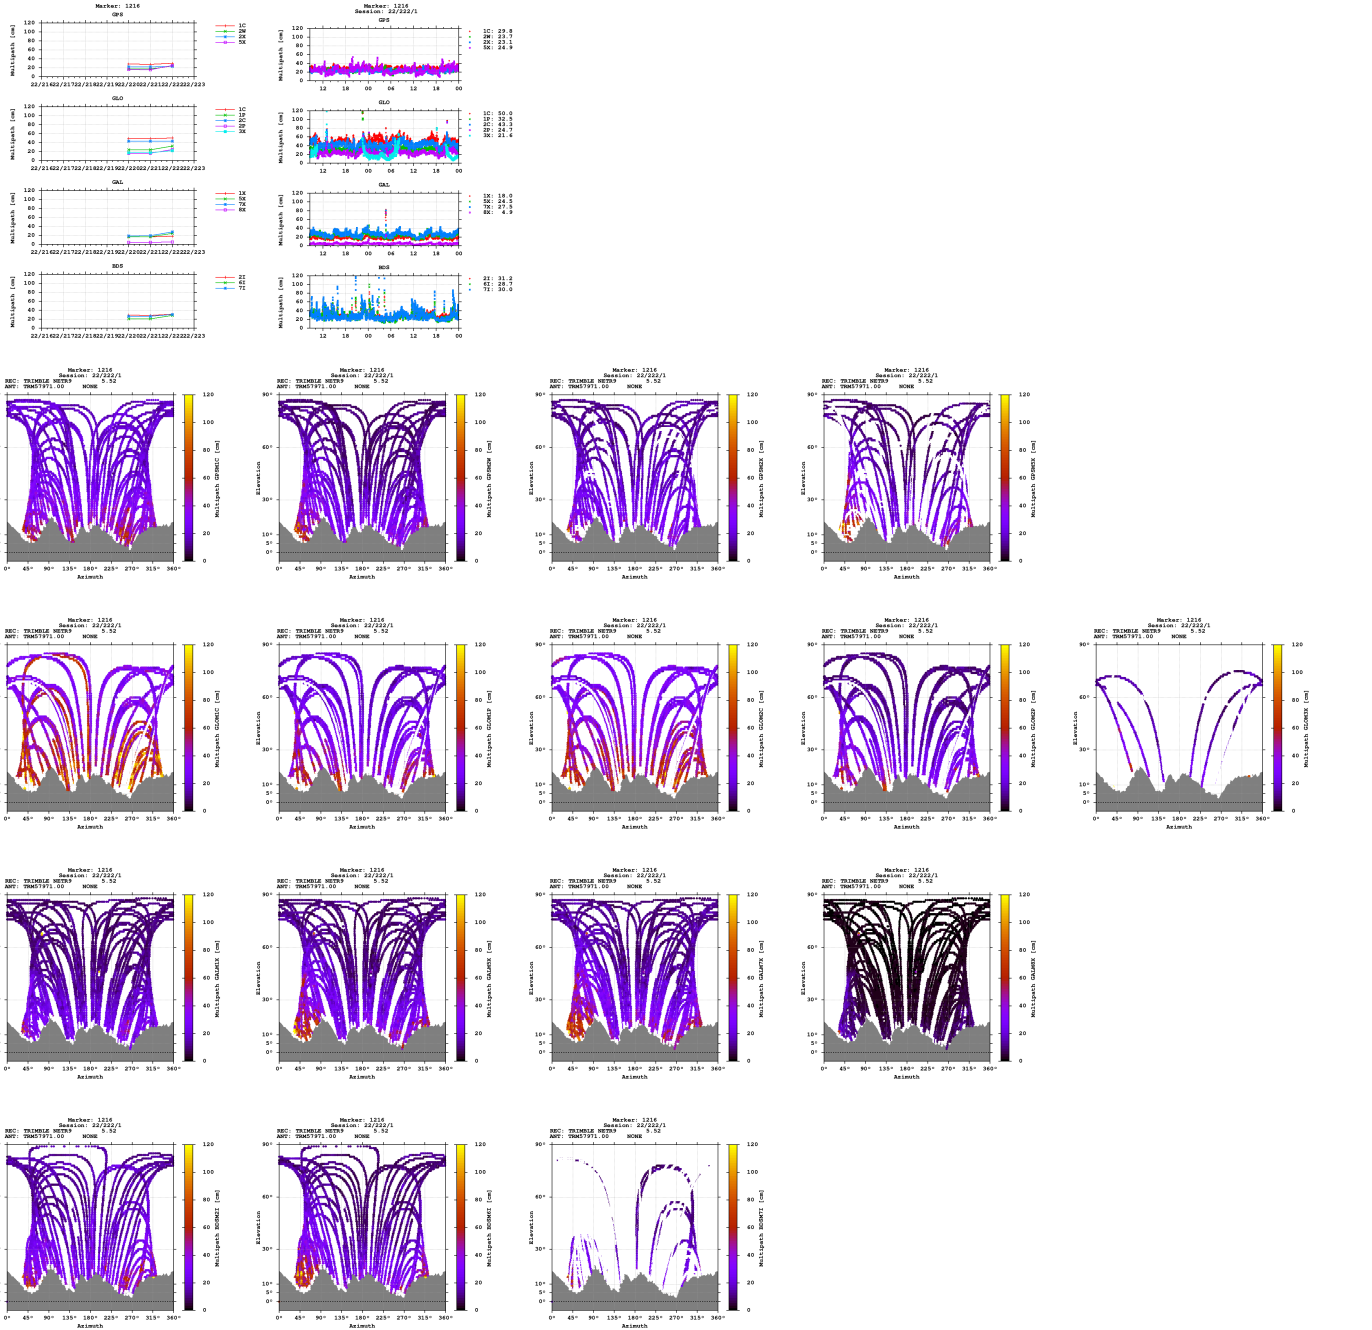




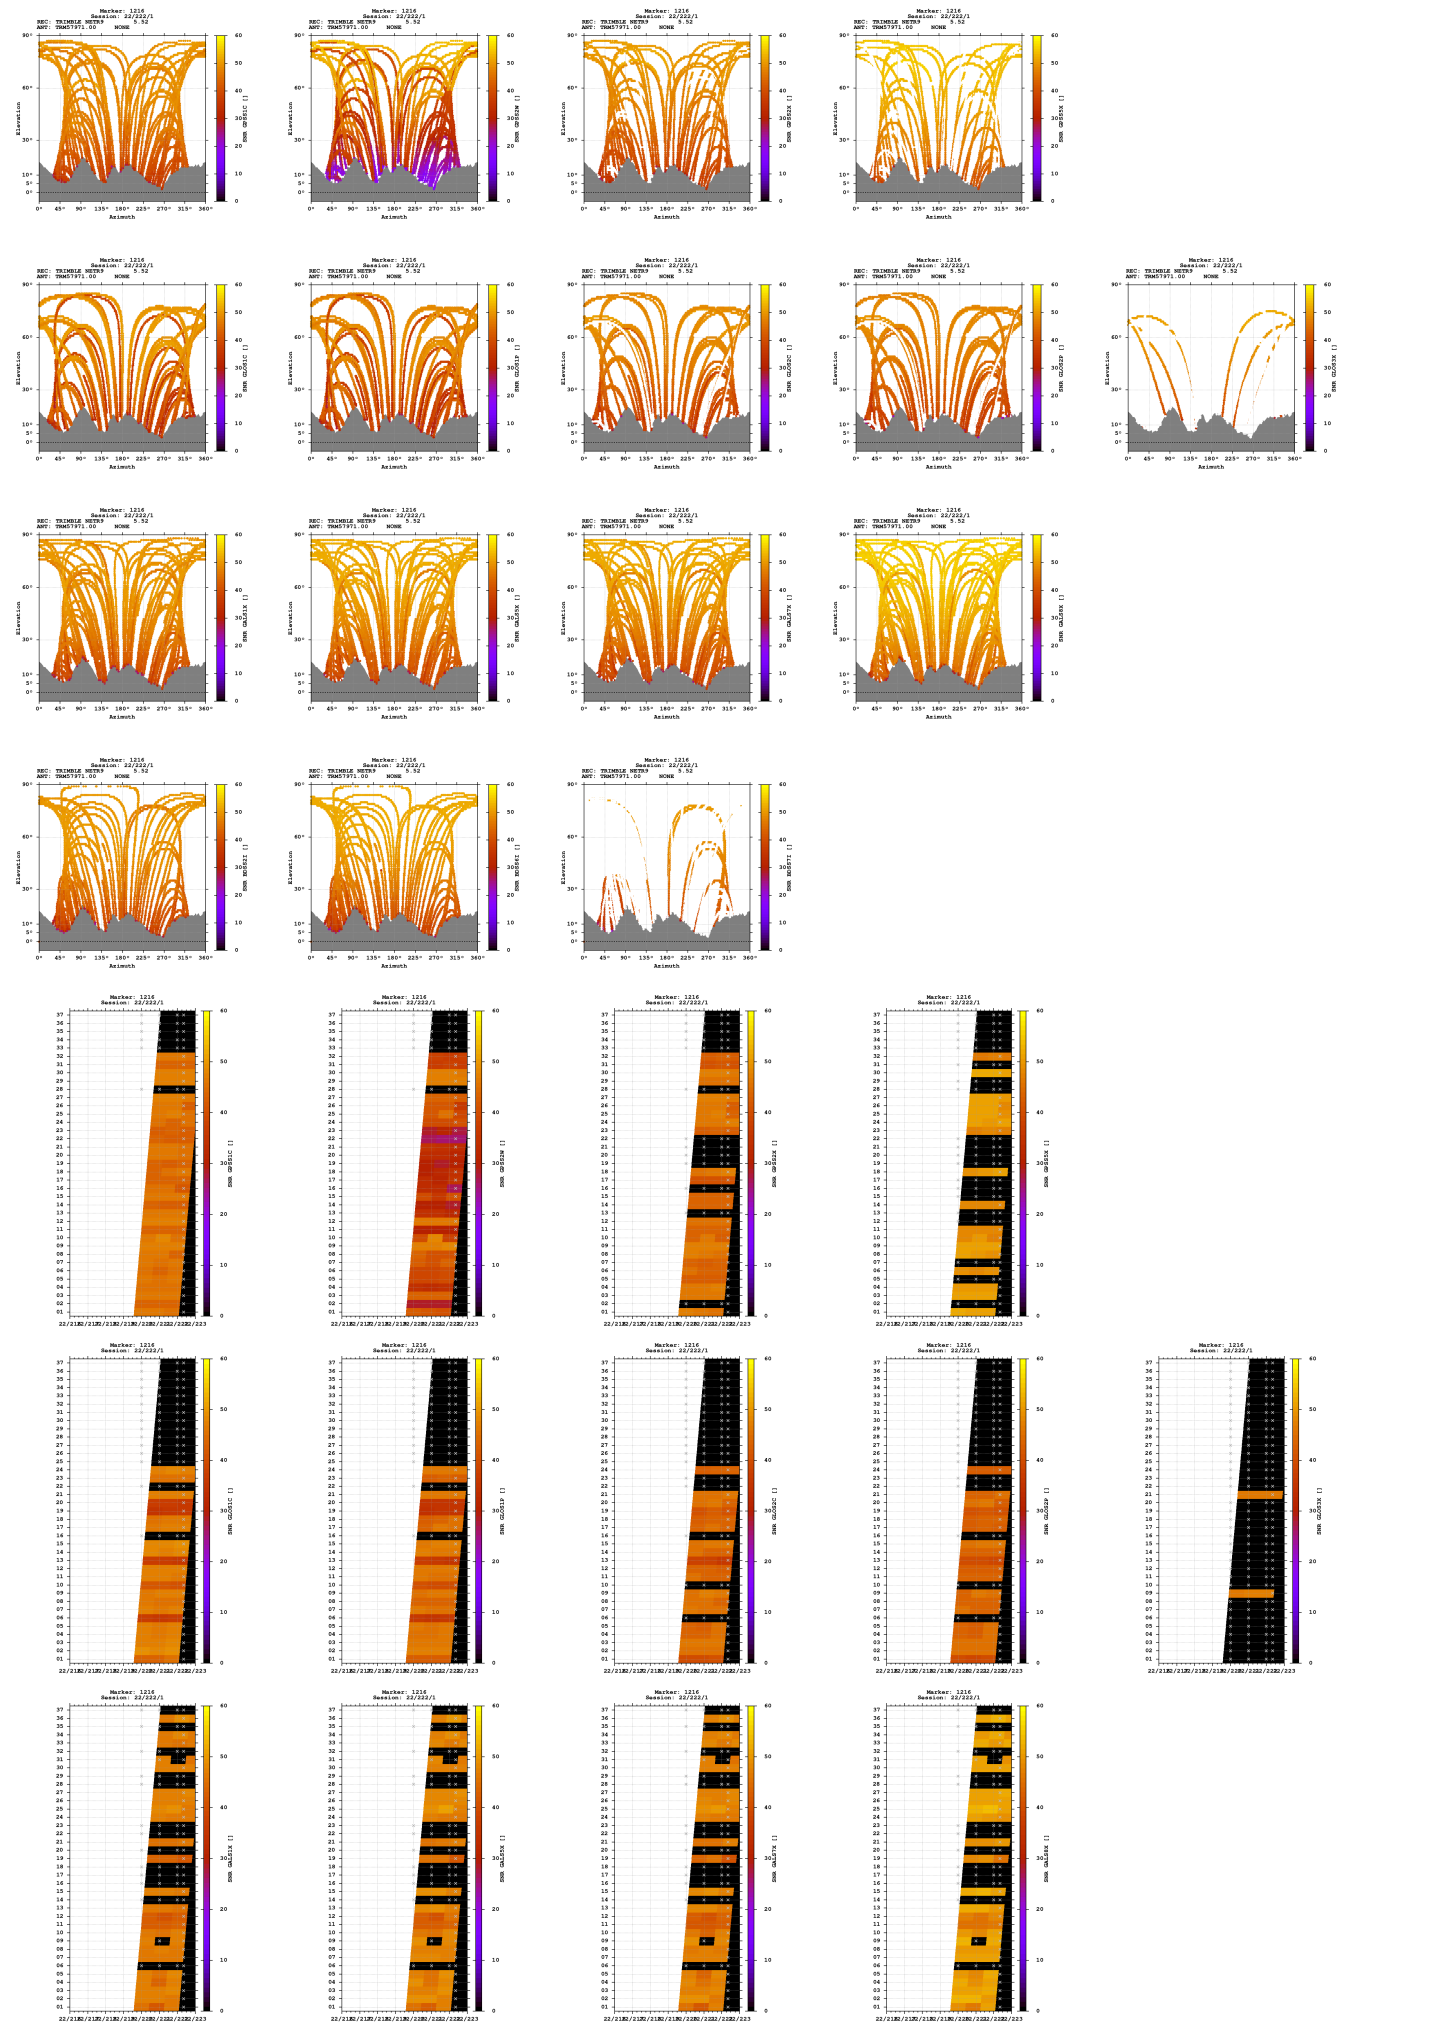

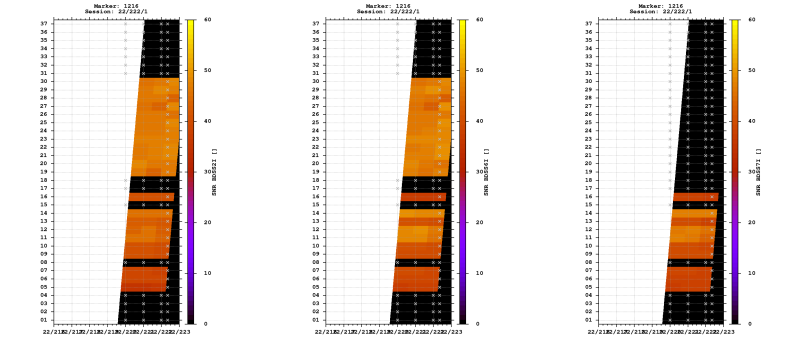


Estimates

2022-08-10 08:31:30	GPS	4322308.8930	737180.7118	4618050.4818	46.676718960	9.678810865	1195.3999
2022-08-10 08:31:30	GLO	4322308.8039	737180.5761	4618049.4424	46.676713270	9.678809313	1194.5678
2022-08-10 08:31:30	GAL	4322308.7504	737180.8092	4618050.1431	46.676717682	9.678812433	1195.0683
2022-08-10 08:31:30	BDS	4322309.2071	737182.4797	4618051.8178	46.676723234	9.678832948	1196.7882

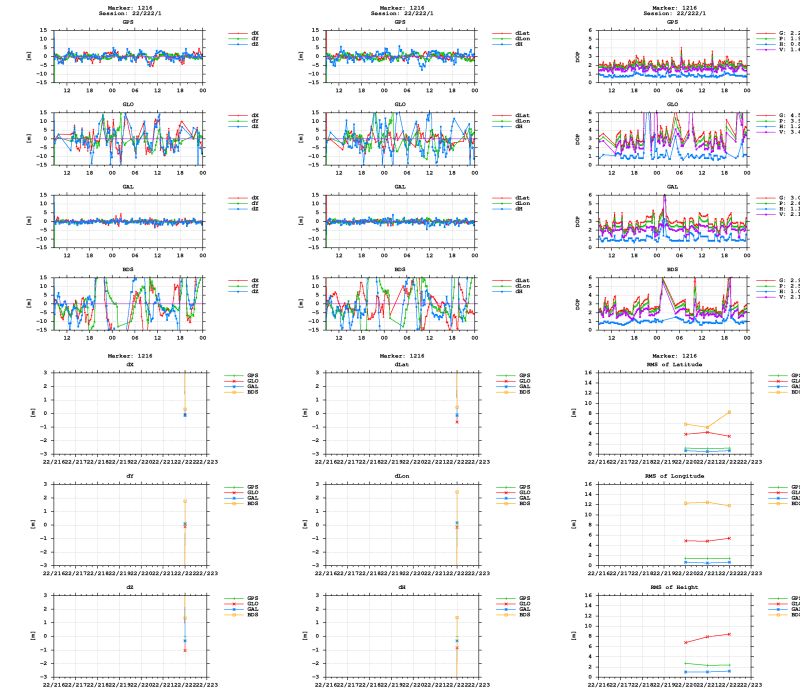

BNC



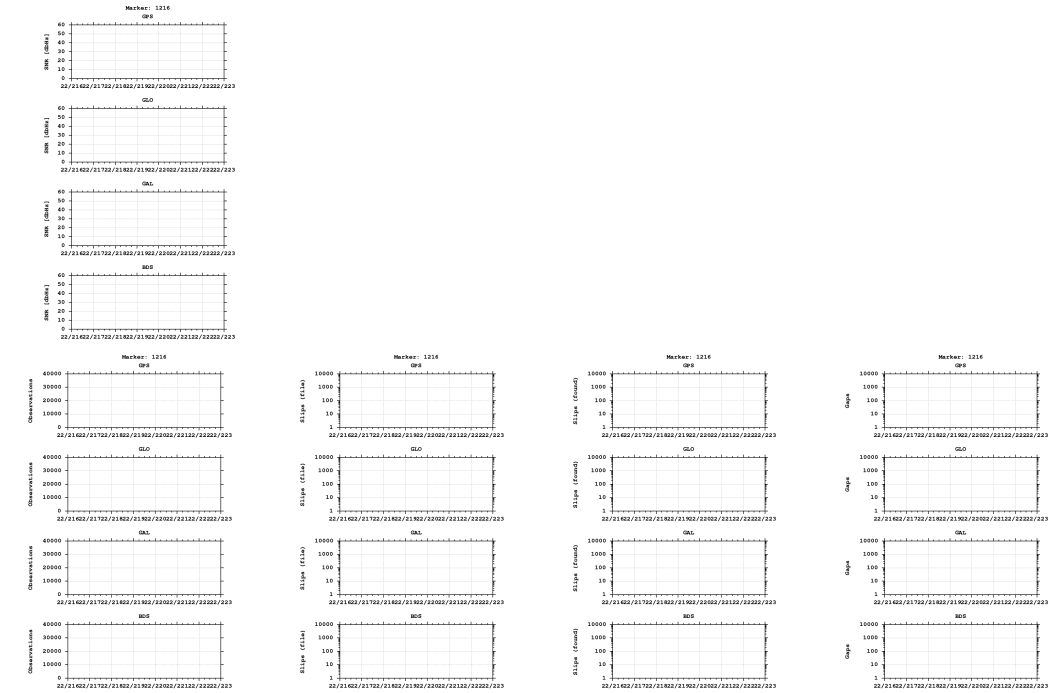

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)